




**VALCO  
CHEMINERT  
CATALOG**

**VICI**

**TOOLS FOR SCIENCE AND MEDICINE**

**INJECTORS  
VALVES  
DETECTORS  
FITTINGS  
SYRINGES  
TUBING**

**CATALOG 65 INT**

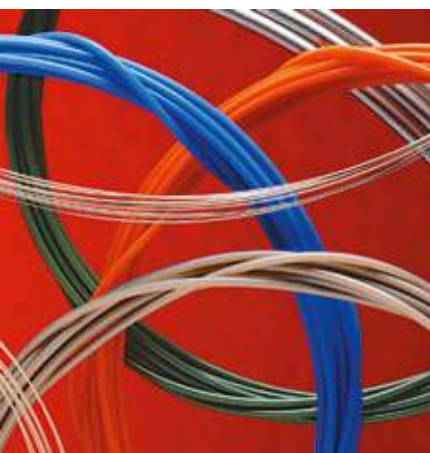



**2** New products



**6** Valco fittings



**56** Cheminert fittings



**82** Liquid handling



**86** Tubing



**96** Valve selection



**98** Valco injectors and valves



**142** Diaphragm valves



**146** Cheminert injectors and valves



**188** Actuators and accessories



**212** Flow, pressure, and on-off controllers



**220** Instrumentation



**228** Calibration gas standards  
from VICI Metronics



**234** GC capillary columns  
from VICI Metronics



**246** Gas purification  
from VICI Metronics



**248** Syringes  
from VICI Precision Sampling

**252** General reference

**270** Index by product number

**286** Index by name of product

**IBC** Ordering information



To order

**EUROPE, MIDDLE EAST, ASIA, and AFRICA**

**VICI AG International**

Sales + 41 41 925 6200 Parkstrasse 2  
 Fax + 41 41 925 6201 CH-6214 Schenkon  
 Email order@vici.ch Switzerland

**NORTH AMERICA (except Canada), SOUTH and CENTRAL AMERICA, AUSTRALIA and NEW ZEALAND**

**VICI Valco Instruments Co. Inc.**

Sales (713) 688-9345 P.O. Box 55603  
 (800) 367-8424 \* Houston, TX 77255  
 \*USA and Canada only USA  
 Fax (713) 688-8106  
 Email sales\_usa@vici.com

**CANADA**

**VICI Valco Instruments Canada**

Phone (866) 297-2626 26 Water Street East  
 (613) 342-2600 Brockville, Ontario  
 Fax: (613) 342-0111 Canada K6V 1A1  
 Email canada@vici.com

**REGULATIONS**



As a worldwide supplier of products for the analytical instrument market, we work hard to make sure those products comply with regulatory requirements around the world. All machined products (valves, fittings, etc.) are fully RoHS/REACH/WEEE compliant. Most of the electrical products we manufacture are also CE tested and certified. Only a few legacy products are not CE certified.

See page 263 for a list of non-CE items.

## Welcome to VICI

VICI is an acronym for Valco Instruments Company Inc. VICI now defines multiple companies which manufacture various products for the analytical industry.

### VICI Valco Instruments

For over 40 years, Valco Instruments has been the leading designer and manufacturer of standard and custom components for precision analytical, biomedical, and biocompatible instrumentation. In addition to Valco and Cheminert® valves and fittings, we offer a wide range of related products such as electric and pneumatic actuators, tubing and sampling loops, heated enclosures, valve sequence and temperature controllers, gas purifiers, GC detectors, and digital interfaces.



**Fafnir, one of a long line of Valco Saint Bernards, at the Houston, Texas office**

### VICI AG International

VICI AG International, in Schenkon, Switzerland, is an independent site for the manufacturing of Valco and Cheminert valves and the handling of all VICI product lines in Europe, Africa, the Middle East, and the Far East. Present certification is ISO 9001:2008 and 14001:2004.

### VICI Metronics

VICI Metronics, Inc. is the leading manufacturer of devices and instruments that are used in the generation of calibration gas standards. The line includes Dynacal and G-Cal permeation tubes, Dynacalibrator calibration gas generators, and gas monitors. Metronics is the leading provider of



**Our engineering/development facility on Waterbury Drive in Houston**

explosives, narcotics, and chemical warfare dopants for TSA airport security (ammonia, DCM), law enforcement, border patrol, military, and other trace detection industry professionals.

We offer high performance gas specific purifiers suitable for use in GC/MS and LC/MS systems. The helium, hydrogen, nitrogen, and air purifiers remove sulfur and nitrogen compounds, halocarbons, hydrocarbons, moisture, oxygen, and other contaminants.

The Metronics facility also houses production of and support for Valco-Bond and ValcoPLOT capillary columns.

### VICI Precision Sampling

Your resource for syringes, Mininert® valves, probes, and tubing. Our pre-cut stainless steel tubing is available in standard lengths, or cut and bent to your specifications. All our syringes feature ultra smooth bores, easily replaceable parts, low dead volume, crisp clean gradations, and precision calibrations.

### VICI Valco Canada

Products from all VICI companies are available in Canada directly from this location. We also supply and support our Canadian dealers and OEMs.



**VICI Precision Sampling  
Baton Rouge, Louisiana**



**VICI AG International in Schenkon, Switzerland**



**VICI Valco Canada  
Brockville, Ontario**



**VICI Metronics  
Poulsbo, Washington**

### CONTACT US

See box on facing page for:

**VICI Valco Instruments  
VICI AG International  
VICI Valco Canada**

#### VICI Metronics

Tel (877) 737-1887  
(360) 697-9199  
Fax (360) 697-6682  
Email metronics@vici.com  
columns@vici.com  
26295 Twelve Trees Lane  
Poulsbo, WA 98370

#### VICI Precision Sampling

Tel (800) 828-1653  
(225) 927-1128  
Fax (225) 923-1331  
Email precision@vici.com  
P.O. Box 15886  
Baton Rouge, LA 70895

# New products

THE LATEST FROM VICI

**NEW**

## Fast GC conversion kit for 6890/7890 GCs

Components for Fast GC . . . . . page 4

These kits include everything you need to turn your standard GC into a high-speed analytical machine. Just specify the column you want and we'll provide the rest. The typical kit takes just an hour to install, with complete step-by-step instructions included. All that's required is a small hole in the top of the column oven, and we even provide the drill bit!




**NEW**

## Fast GC components turbocharge analyses

Column temperature controller . . . . . page 5

Our Fast GC controller provides programmable temperature control for analysis-optimized column bundles. The programmable controller coupled with a column bundle (we can provide one using our fused silica column or yours) slashes conventional analytical times. The result of years of research, these systems provide high throughput analyses at a fraction of the cost of a conventional GC.

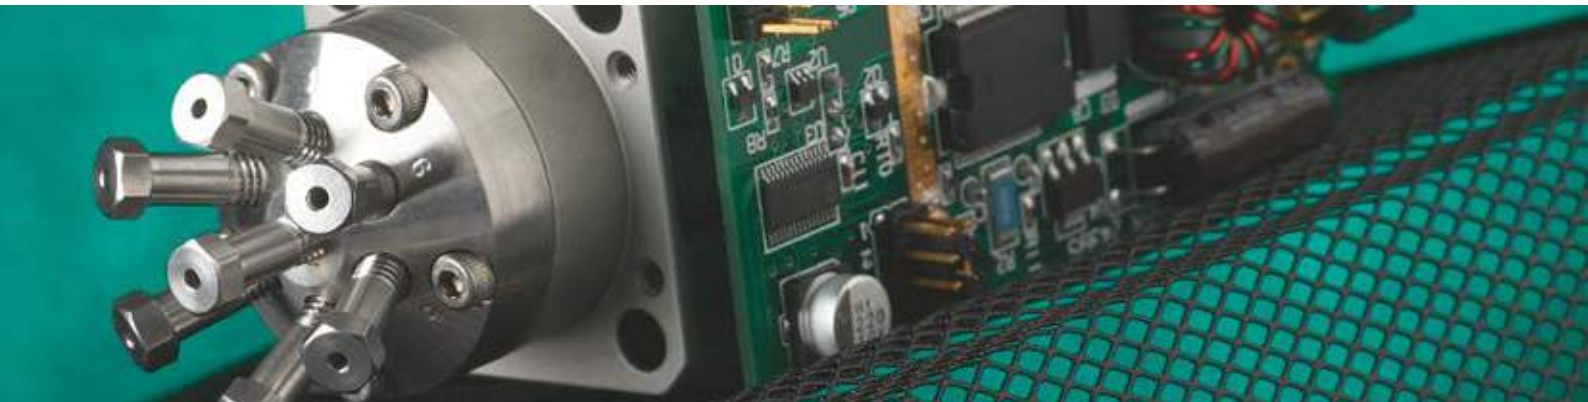

**NEW****Mini PDD detector helps pay for itself**

miniPDD Model D-2-IM ..... page 222

The miniature D-2-IM consumes less than one fifth as much helium as its big brothers, our popular D-3 and D-4 pulsed discharge detectors. With the ever-increasing price of helium, this can represent savings of hundreds of dollars per year. With robust performance, easy maintenance, and nearly the same sensitivity as the larger models, the mini PDD is the clear choice for field portable applications and for labs concerned about operational costs.

**NEW****New modular universal actuator to replace the microelectric**

Modular universal actuator ..... page 194

This new version of the popular universal actuator gives greater flexibility for the instrument manufacturer working in the limited space frequently encountered in modern instruments. The design also makes it possible to mount the more sensitive electronics module away from the liquid end of the valve. The modular unit has all the features of the composite model, allowing instrument manufacturers to use a single motor and control software to operate virtually any Valco or Cheminert rotary valve, with greater programmability plus optional communication interfaces.

**NEW****Special adapters ease connectivity to 360 micron tubing**

Internal reducers for 360  $\mu$ m tubing ..... page 38

External to internal reducer for 360  $\mu$ m tubing ..... 39

Our unique 360 micron fittings permit direct connection to any capillary tubing with 360  $\mu$ m OD. But making the transition to valves or other fittings with larger tubing meant using a union. Now you can minimize the number of connections using our IZR and EZR adapters. IZR permits plumbing 360  $\mu$ m tubing directly into a 1/16" or 1/32" Valco fitting detail, and the EZR permits the same connection to 1/16" external details. Available in PEEK or stainless steel.

**NEW**

## Components for fast GC

### The Problem

In the quest for more rapid chromatographic results, there are two distinct avenues – the small, portable instruments made specifically for use in the field, and traditional GCs which are modified to accelerate the analysis. The components developed by Valco engineering exceed the requirements of both approaches.

### The Solution


Valco now offers a variety of components which can be used individually or in concert with others to provide the optimal solution for the analysis.

- Resistively-heated low mass columns
- Fast temperature controller
- Pulsed discharge detector (PDD)

Our valves can provide the necessary sample injection, and resistively-heated columns dramatically decrease analysis time. The fast temperature controller offers provisions for multiple ramp temperature programming with a user-friendly Windows interface and a compact size suitable for use in the lab or in the field. Column temperature is controlled by regulating the amount of current applied to the wire-wrapped or nickel-clad capillary column.

We offer a variety of detector options to suit a wide array of applications – from our TCD to our popular PDDs (pulsed discharge detectors), which can be tuned for optimal analyte specificity. Our new miniPDD (page 222) is ideal for portable applications or for areas where helium use must be minimized.


So whether you have a traditional lab GC that you want to turbo-charge or are building a portable GC for rapid analyses, our extensive line of fast GC components can help get the job done on time and on budget.

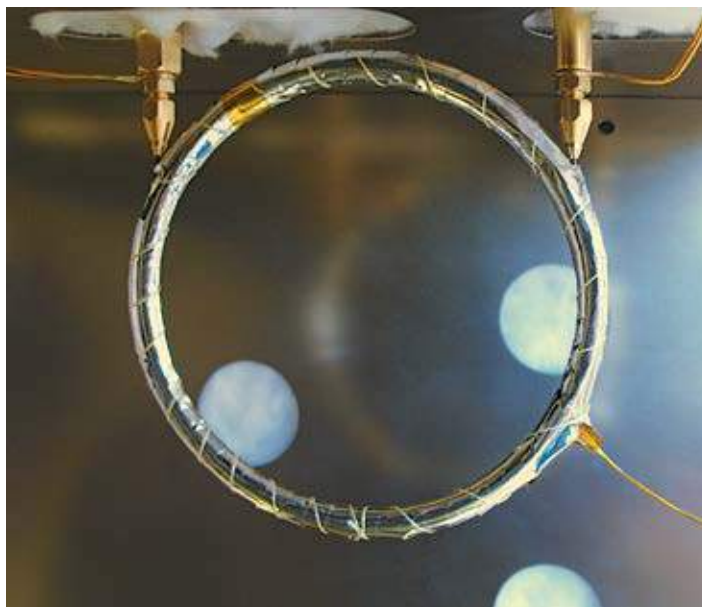


Column kit installed in Agilent 6890 column oven



View of relocated Agilent FID to permit use of fast GC column kit

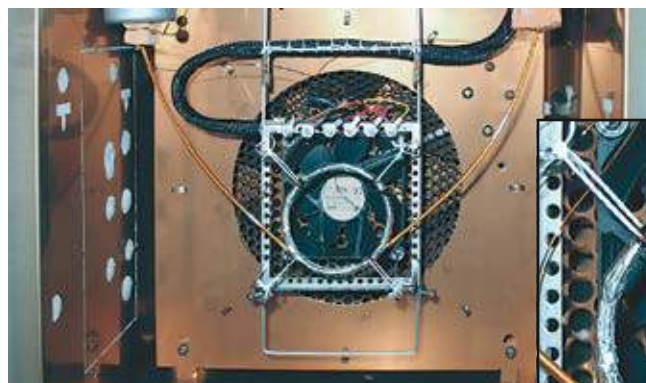

Resistively-heated column installed in traditional column oven

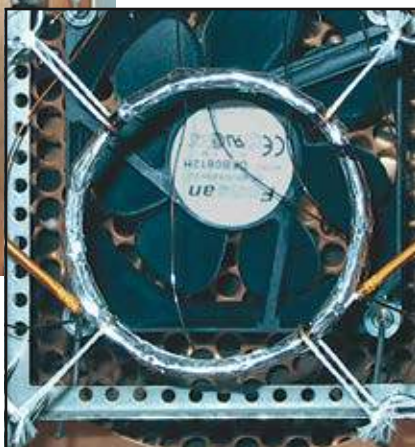

**TO DISCUSS YOUR REQUIREMENTS IN DETAIL, CONTACT OUR TECHNICAL DEPARTMENT**

#### MORE INFORMATION

Fast GC temperature controller	...page 5
miniPDD	.....222
PDD Pulse discharge detector	.....223
TCD Thermal conductivity detector	.....227




## Column temperature controller

- For use with nickel-wire and nickel-clad resistively-heated columns
- Programmable 8-state temperature profile
- Compatible with any GC or analyzer
- User-friendly Windows-based control and monitor program
- OEM and end user versions available

The VICI column heating unit is designed for precise temperature programming with rapid heating and cooling of a low mass nickel-clad or nickel-wire column. The column is resistively-heated by applying a low-voltage current to the column coating or wire, eliminating the need for a traditional GC column oven and heating element with their power and space requirements. Column temperature is controlled by regulating the amount of current, with a small fan for quickly cooling the low-mass column to near-ambient temperature.


These features plus speed, compact size, and low power requirement make this unit an ideal component in fast, portable GCs, but it can be easily employed on any GC or analyzer.

The Windows-based control program (*screen capture below*) facilitates simple creation of temperature profiles with as many as eight states, and allows multiple columns to be tuned with each configuration saved for reloading. Multiple data parameters can be graphed, with data logged and analyzed.

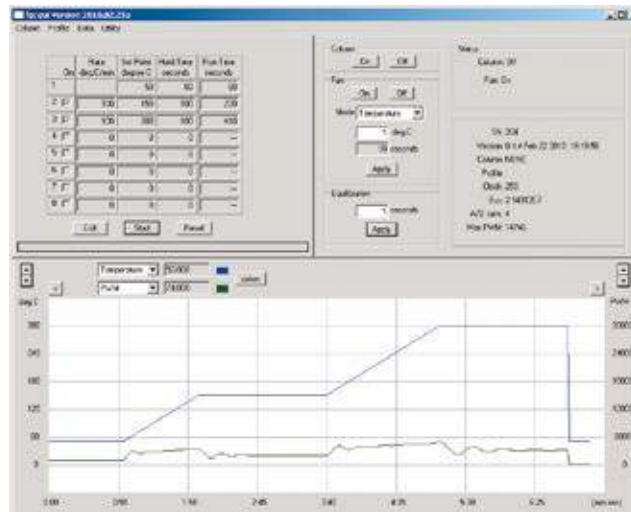

### SPECS

Programmable temperature states	8
Fan modes	4
Max ramp rate	5m column 1,200°C/min 15m column 500°C/min
Accuracy	Isothermal 0.1°C Programmed <0.5°C, in most cases
Interfaces	USB, I <sup>2</sup> C

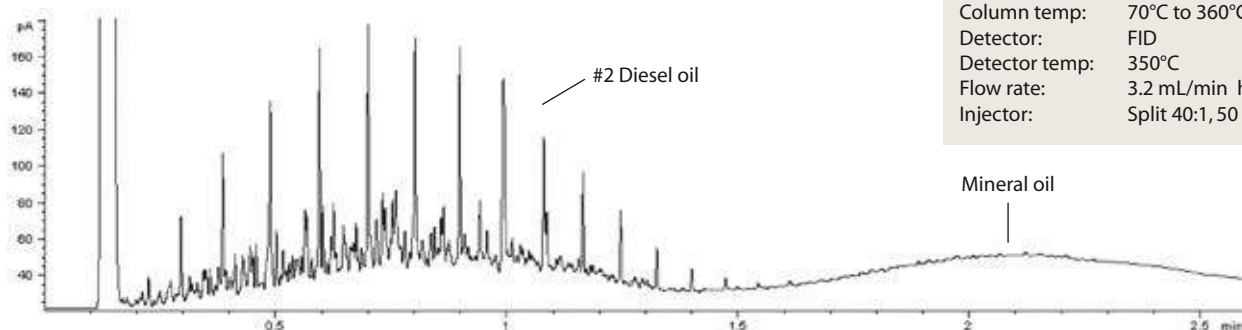

### #2 DIESEL PLUS MINERAL OIL

Column:	VB-5 5 m x 0.10 mm x 0.10 $\mu$ m, Nickel-wire
Column temp:	70°C to 360°C at 120°C/min
Detector:	FID
Detector temp:	350°C
Flow rate:	3.2 mL/min helium
Injector:	Split 40:1, 50 psi, 280°C

# Valco fittings


THE INDUSTRY STANDARD

The compression fitting (**Figure 1**), in which a one- or two-piece ferrule is compressed onto the tube as a nut is tightened, offers reliability in high pressure situations and in connecting metal tubing. Valco excels in all critical areas of the design and manufacture of such fittings. Quality considerations, which cannot be ignored if an analytical system is to reach and maintain optimum performance levels, include interchangeability, counterbore tolerances, ID/OD concentricity, mixing potential, cleaning procedures, and the method employed to “make up” the ferrule on the tube.

## No Tubing Deformation

The basic concept of compression fittings carries the inherent danger of tube deformation (**Figure 2**). While some manufacturers emphasize this positively as a method of ensuring that the tubing doesn't blow out of the ferrule, the flow anomalies introduced by the restricted ID make these fittings a poor choice for many instrument applications.

Valco metal ferrules cut a ring near the end of the tube (**Figure 3**), which prevents tube release at high pressures without significantly deforming and restricting the tube interior. Because our ferrules have a sharp edge at the ID near the nose, this usually takes only about 1/4 turn beyond the point where the ferrule first starts to grab the tubing. There is so little tube distortion that they are routinely used with glass-lined tubing! Only Valco's polymer fittings rely on friction to hold a tube.

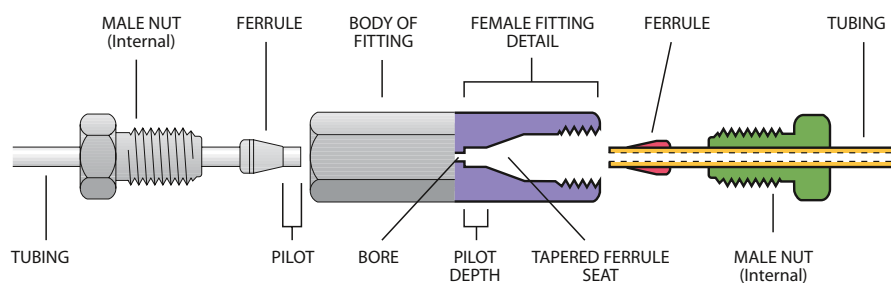

**Figure 1**  
Valco compression fitting

### CAUTION!

The analytical devices market has attracted numerous companies which copy Valco/Cheminert designs. Please exercise caution in the use of copies, which may not be compatible with the original versions in this catalog.

Because of VICI's high volume production and dedicated machinery, our fittings are often less expensive and of consistently higher quality than competing copies.


### TECH TIP

For optimal zero dead volume connections, make sure your tubing meets the best industry standards – OD tolerance should be nominal dimension  $\pm .002$ ".


Fractional dimension	Nominal dimension
1/32"	.031
1/16"	.062
1/8"	.125
1/4"	.250
3/8"	.375
1/2"	.500





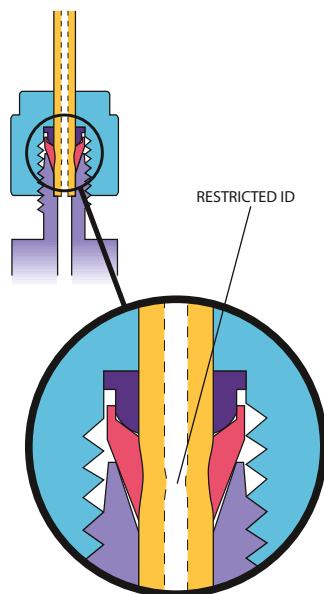

**Figure 2**  
ID restriction  
in common compression fitting

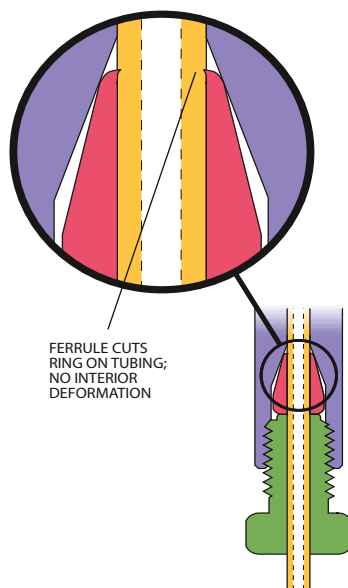

**Figure 3**  
No ID restriction  
in Valco compression fitting


## Interchangeability

Valco fitting details are designed with a consistent pilot depth, permitting reliable interchangeability as connections are revised or fittings are replaced. This interchangeability extends throughout the Valco and Cheminert fitting and valve product lines. Indeed, the Valco standard has been so widely copied that Valco and Cheminert fittings are, in general, fully interchangeable with those of our major competitors.\* In initial installations, Valco ferrules will often improve other manufacturers' fitting connections.

Because of variations in tubing OD and in pilot and taper designs from manufacturer to manufacturer, the amount of tubing extending beyond the made up ferrule can vary. (The most radical variation is in the fittings manufactured by Waters. Based on the old Swagelok design, they have a pilot depth considerably longer than standard.) **Figure 4a** shows a properly made up fitting. If that same fitting is installed in a detail which was designed for a slightly longer tube extension (as in **Figure 4b**), dead volume will be introduced. In the opposite case, with the pilot shorter than the pilot depth (**Figure 4c**), the tube will bottom out before the ferrule has sealed. However, our tests prove that except in the most extreme cases, a Valco ferrule will "creep" on the tubing until it reaches the bottom of the ferrule taper, making a proper seal.

## Reliably Clean

Most of our state of the art CNC machines use water-based lubricants. After each part comes off the machine, it is cleaned with water-soluble detergents and then rinsed in hot deionized water. Finally, every metal fitting that we make is given a thorough cleaning with steam from deionized water at 140°C. Any critical parts processed with oil-based lubricants are baked to remove all traces. The practical result of the extra effort is this: you don't have to be concerned about solvent residues.

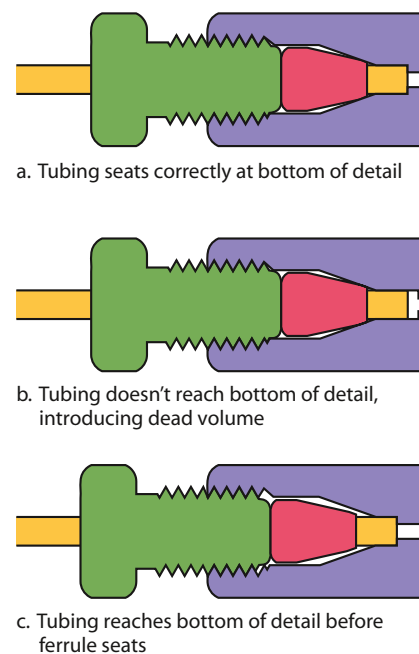


**Figure 4**

\* An exception is the longer pilot depth on Cheminert high pressure valves with polymeric stators.

### Precision Machining, Finishing, and Tolerances

The machining methods used by different manufacturers to finish the detail of compression fittings vary in several ways that affect performance, as shown below. The fitting in **Figure 5** is the best choice for high performance fittings, as the tube fits squarely into the bottom of the detail. This is the detail used in Valco and Cheminert high pressure fittings. Some fitting manufacturers omit a critical finishing operation which makes the bottom of the detail square, leaving the shape of the typical tapered drill bit instead. This results in the fitting shown in **Figure 6**, which introduces extra volume and mixing potential. VICI uses proprietary tooling specifically designed to produce the same high precision detail in every Valco and Cheminert fitting.

Although sometimes the tube end may seal in the bottom of the detail, the intent is for the seal to be made at the ferrule. This leaves the possibility of seepage up around the tube and into the minute cavities between the end of the ferrule and the bottom of the ferrule seat. The probability of this seepage increases when there is an excessive variance between the tubing OD and the diameter of the counterbored pilot in which it sits, and between the ferrule OD and the ferrule ID at the point where it “bites” or crimps the tubing. The possibility is virtually eliminated in VICI’s fittings, which are manufactured with the precise dimensions that chromatographic applications demand. Use of VICI precut tubing, which is manufactured to quality standards in excess of most commercial tubing, further assures the best fitting connection.

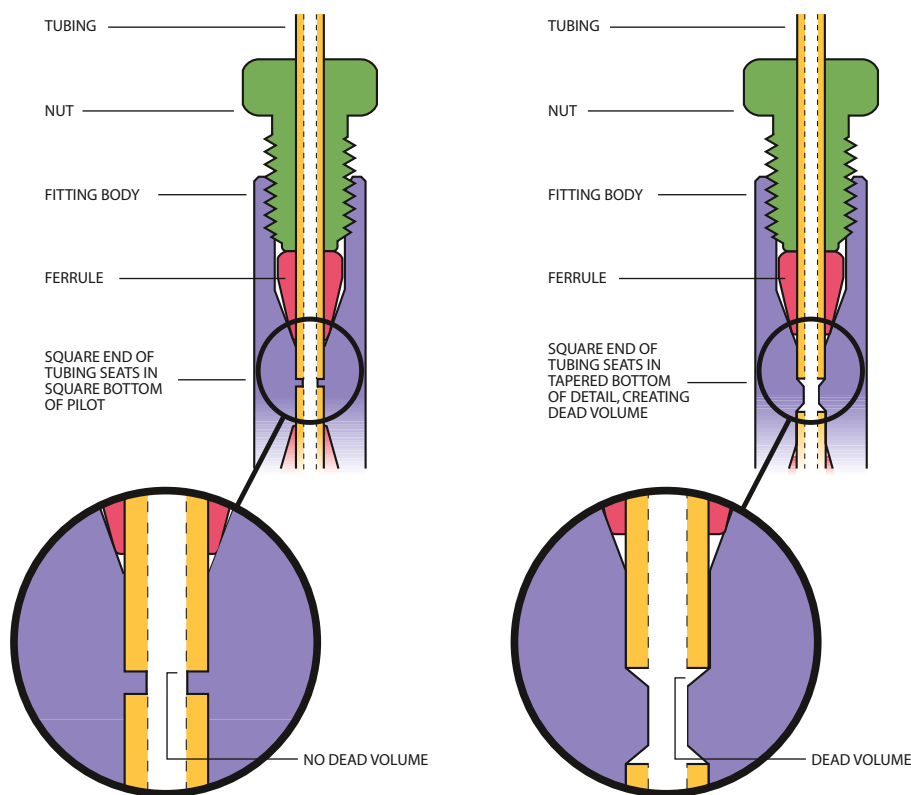


**Figure 5**  
Valco/Cheminert high pressure  
compression fitting


**Figure 6**  
Poor quality  
compression fitting

## Comparison of Compression Fitting Designs


The potential for dead volume and mixing is a consideration in other aspects of fitting design as well, and varies considerably among manufacturers. For example, the common gas distribution reducing union in **Figure 7** illustrates two problems for instrumentation: a large connecting volume, and various steps and restrictions which cause mixing. While there are many uses for these fittings upstream of the analytical system (such as bulk gas distribution), they cause problems when used downstream in critical applications.

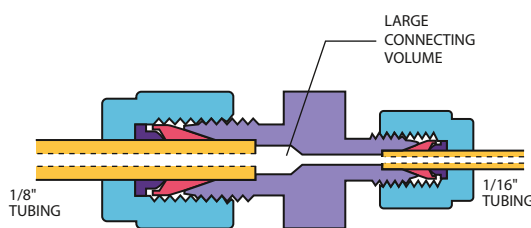

**Figure 7**  
Common commercial  
reducing union

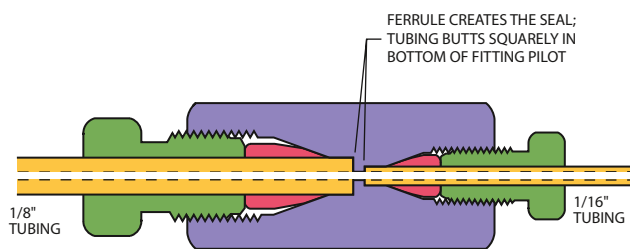

**Figure 8**  
Valco zero dead volume  
reducing union

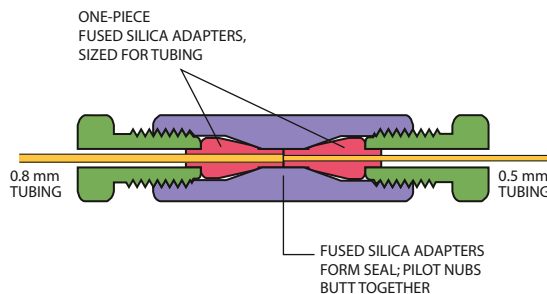

**Figure 9**  
Valco zero dead volume  
through-bore union

Additional difficulties may be encountered if this type of fitting is loosened and retightened repeatedly. The male threaded part can become flared to the point where it is impossible to get the nut on, and the tube end often flares out in the fitting detail so that it's difficult to remove the tube.

The Valco internal union (**Figure 8**) has a larger mass surrounding the ferrule, so that even with repeated remakes or overtightening, it's impossible to flare the fitting as in the external design. When a union is selected with a bore to match the ID of the connecting tubing, mixing and dead volume are virtually eliminated.

For connection of fused silica tubing of the same or differing sizes, the through-bore union shown in **Figure 9** is recommended. This fitting permits the use of our one-piece fused silica adapters to effect a true zero dead volume connection. The ferrule features an integrated pilot which adapts to the ID of the unions, resulting in an inert, zero volume connection.

Every Valco and Cheminert fitting is manufactured to exacting specifications. Fitting concentricity – the relationship of the center of one fitting to another – is held to within 10% of the bore size (0.05 mm in a typical 1/16" union with 0.5 mm bore), which is better than that of commonly used *tubing*. This results in fittings which contribute no "extra column effects" or loss of efficiency to the chromatographic system.

Valco metal compression fittings can be used safely at UHPLC and SFC pressures when the fitting size is 1/16" or smaller. Our fittings of this type have been tested at pressures exceeding 50,000 psi. The pressure limitation with these is generally the safe working pressure of the tubing, and not the fitting itself.

**VALCO FITTINGS**

**Internal nuts – stainless steel**

Nuts with product numbers starting with Z are for use with all standard Valco internal fittings and most valves. They may be used with fittings from other manufacturers as well. The L (long) and XL (extra-long) types are for situations where the fitting head may be otherwise inaccessible or where interference between fittings exists, as on many Valco multiposition valves. Standard material is 300 series stainless.


Package of 10:	Length	Stainless nuts Prod No
1/32" nut	.30"	ZN.5-10
1/32" nut	.45"	LZN.5-10
1/16" nut	.43"	ZN1-10
1/16" nut	.50"	MZN1-10
1/16" nut	.625"	IZN1-10
1/16" nut	.75"	LZN1-10
1/16" nut	1.00"	XLZN1-10
1/8" nut	.57"	ZN2-10
1/8" nut	.82"	LZN2-10
1/8" nut	1.07"	XLZN2-10
1/4" nut	.70"	ZN4-10
1/4" nut	1.11"	LZN4-10



**Controlled radius nuts – stainless steel and PEEK**

These patented\* special purpose nuts facilitate a tight bend as the tube exits the fitting, and can also help prevent kinks in very thin wall tubing. Controlled radius nuts are available in a range of sizes. Note that the short version (ZSN1R) can *only* be used in certain applications. Call for more information.

Description	Length	Prod No
<b>Stainless steel</b>		
1/16", standard	.43"	ZN1R
1/16", short	.30"	ZSN1R
1/8", standard	.57"	ZN2R
<b>PEEK</b>		
1/16", hex	.45"	ZN1RPK
1/16", fingertight	.88"	ZN1RFPK



**Controlled radius nut**  
Standard length

\*U.S. patent number 6,247,731.

**TECH TIP**

Fittings for **360 micron** tubing are available on pages 57-58.

**MORE INFORMATION**

PEEK nuts ..... page 63  
 HPLC column end fittings ..... 42-46  
 Reducing unions  
   Internal..... 29  
   External ..... 30  
   External/internal..... 31  
   Internal/external..... 31  
 Unions  
   Internal..... 26  
   External ..... 27  
   External/internal..... 27

**CONVERSIONS**

0.25 mm	= .010"
0.50 mm	= .020"
0.75 mm	= .030"
1.0 mm	= .040"
1.5 mm	= .060"
2.0 mm	= .080"
4.6 mm	= .180"
6.0 mm	= .236"
6.4 mm	= .253"
7.0 mm	= .275"
10.0 mm	= .400"
27.0 mm	= 1.08"
1/32"	= 0.8 mm
1/16"	= 1.6 mm
1/8"	= 3.2 mm
1/4"	= 6.4 mm
3/8"	= 9.5 mm
1/2"	= 12.7 mm



**External nuts – stainless steel**

External nuts are used with external fittings, such as our column end fittings (ECEP series) and external unions (EZU and EZRU series). They may also be used with Valco ferrules on Parker CPI and Swagelok type fittings. Standard material is 300 series stainless.

\* PTFE-coated threads standard.

**Stainless nuts**

<i>Description</i>	<i>Prod No</i>
1/32" external nut	EN.5
1/32" external nut, knurled	EN.5KN
1/16" external nut	EN1
1/8" external nut	EN2
1/4" external nut	EN4 *
3/8" external nut	EN6 *
1/2" external nut	EN8 *
1" external nut	EN1K *



**Plugs – stainless steel and high pressure**

Stainless plugs consist of a zero volume nut with a ferrule made up on a solid rod. For high pressure applications such as UHPLC, SFE, and SFC (>7000 psi), we recommend the special high pressure plugs with the ferrule and rod machined as a single, solid piece.

**Stainless plugs    High pressure stainless plugs**

<i>Description</i>	<i>Length of plug*</i>	<i>Prod No</i>	<i>Prod No</i>
1/32"	.49"	ZP.5	ZP.5H
1/16"	.75"	ZP1	ZP1H
1/16"	1.13"	LZP1	LZP1H
1/8"	1.00"	ZP2	ZP2H
1/8"	1.40"	LZP2	LZP2H
1/4"	1.20"	ZP4	—



**Caps – stainless steel**

A cap is essentially a piece of hex stock with a zero volume fitting detail machined into it, but with no through-hole.

**Stainless caps**

<i>Description</i>	<i>Length of cap*</i>	<i>Prod No</i>
1/32"	.55"	ZC.5
1/16"	.77"	ZC1
1/8"	1.01"	ZC2
1/4"	1.24"	ZC4

**MORE INFORMATION**

PEEK plugs ... pages 64, 71  
 PEEK plugs for high pressure Cheminert valves ..... 64  
 PEEK caps ..... 64

## VALCO FITTINGS

Valco metal ferrules cut a ring near the end of the tube, preventing tube release at high pressures without significantly deforming and restricting the tube interior. (However, if the hardness of the tubing is equal to or greater than that of the ferrule, deformation of the tube rather than a cut ring is likely.) Make up usually takes only about a 1/4 turn beyond the point where the ferrule first starts to grab the tubing. Polymeric ferrules seal by the increased friction from compression.



Valco zero volume ferrules may be used with all Valco fittings and with those of most other manufacturers. The maximum pressure limit is generally determined by the yield strength of the tubing. The maximum pressure for softer materials (such as brass and polymers) is

lower, and depends on the tubing used. If in doubt about a particular combination, consult our technical staff.

For trace gas analysis, use gold-plated ferrules to achieve sealing with  $<10^{-9}$  cc/atm/sec leakage.

### Metal ferrules

	Prod No	Prod No	Prod No
<b>Package of 10:</b>	<b>Stainless, Type 303</b>	<b>Stainless, Type 316</b>	<b>Stainless, Gold-plated</b>
1/32"	ZF5-10	ZF5S6-10	ZF5GP-10
1/16"	ZF1-10	ZF1S6-10	ZF1GP-10
1/8"	ZF2-10	ZF2S6-10	ZF2GP-10
1/4"	-	ZF4S6-10	ZF4GP-10
<b>Sold individually:</b>	<b>Hastelloy C</b>	<b>Nickel</b>	<b>Titanium</b>
1/32"	ZF5HC	ZF5NI	ZF5TI
1/16"	ZF1HC	ZF1NI	ZF1TI
1/8"	ZF2HC	ZF2NI	ZF2TI
1/4"	ZF4HC	ZF4NI	ZF4TI
<b>Package of 10:</b>	<b>Brass</b>		
1/32"	ZF5B-10		
1/16"	ZF1B-10		
1/8"	ZF2B-10		
1/4"	ZF4B-10		

- Not available

Larger sizes and/or specific materials may be available on special order.

### METALS AT A GLANCE

Hastelloy C® ..... HC

*Resistant to pitting;  
Resists oxidizing atmospheres*

Nickel ..... NI

*Resistant to caustics,  
high temp halogens,  
and hydrogen halides*

Stainless steel,  
Gold-plated ..... GP

*More inert than standard stainless*

Stainless steel,  
Type 303  
GC, gas lines, general purpose

Stainless steel,  
Type 316 ..... S6  
LC with high chloride ions in solutions

Titanium ..... TI  
Outstanding resistance to most media except hydrofluoric acids

Brass ..... B  
Not recommended for most chromatographic applications

For more detailed information on metals, refer to the discussion on pages 254-255.

### CONVERSIONS

0.25 mm = .010"  
0.50 mm = .020"  
0.75 mm = .030"

1.0 mm = .040"  
1.5 mm = .060"  
2.0 mm = .080"

4.6 mm = .180"  
6.0 mm = .236"  
6.4 mm = .253"

7.0 mm = .275"  
10.0 mm = .400"

27.0 mm = 1.08"

1/32" = 0.8 mm  
1/16" = 1.6 mm  
1/8" = 3.2 mm

1/4" = 6.4 mm  
3/8" = 9.5 mm  
1/2" = 12.7 mm

### FERRULE IDENTIFICATION

To differentiate among the most commonly ordered metal ferrules, ring(s) are engraved on the non-sealing surfaces.



**Polymeric ferrules**



	Prod No	Prod No	Prod No
<b>Package of 10:</b>	<b>PTFE, Virgin</b>	<b>PTFE, Glass-filled</b>	<b>FEP</b>
1/32"	ZF.5TF-10	ZF.5TFG-10	ZF.5FEP-10
1/16"	ZF1TF-10	ZF1TFG-10	ZF1FEP-10
1/8"	ZF2TF-10	ZF2TFG-10	ZF2FEP-10
1/4"	ZF4TF-10	ZF4TFG-10	ZF4FEP-10
3/8"	ZF6TF-10	ZF6TFG-10	ZF6FEP-10
1/2"	ZF8TF-10	ZF8TFG-10	ZF8FEP-10
<b>Package of 10:</b>	<b>PFA</b>	<b>CTFE</b>	<b>PEEK</b>
1/32"	ZF.5PFA-10	ZF.5KF-10	ZF.5PK-10
1/16"	ZF1PFA-10	ZF1KF-10	ZF1PK-10
1/8"	ZF2PFA-10	ZF2KF-10	ZF2PK-10
1/4"	ZF4PFA-10	ZF4KF-10	ZF4PK-10
3/8"	ZF6PFA-10	ZF6KF-10	ZF6PK-10
1/2"	ZF8PFA-10	ZF8KF-10	ZF8PK-10
<b>Package of 5:</b>	<b>Polyimide, Graphite</b>	<b>Polyimide, Valcon</b>	<b>Polyimide, Virgin</b>
1/32"	ZF.5GV-5	ZF.5V-5	ZF.5V1-5
1/16"	ZF1GV-5	ZF1V-5	ZF1V1-5
1/8"	ZF2GV-5	ZF2V-5	ZF2V1-5
1/4"	ZF4GV-5	ZF4V-5	ZF4V1-5
3/8"	ZF6GV-5	ZF6V-5	ZF6V1-5
1/2"	ZF8GV-5	ZF8V-5	ZF8V1-5

**POLYMERS AT A GLANCE**

CTFE ..... KF  
*Resists all inorganic corrosives.  
 Produced as Kel-F®*

FEP ..... FEP  
*Chemical resistance equals PTFE, but lower creep and higher friction*

PEEK ..... PK  
*Chemical resistance; up to 225°C*

PTFE, Glass-filled. .... TFG  
*Inert, mechanically stable*

PTFE, Virgin. .... TF  
*Inert; very soft, easily cold flows.  
 Produced as Teflon®*

Polyimide, Graphite. .... GV  
*Soft, easy to form ferrules*

Polyimide, Valcon. .... V  
*High temp, graphite reinforced*

Polyimide, Virgin. .... V1  
*High temp, electrical insulator*

For more detailed information on polymers, refer to the discussion on page 256.

**MORE INFORMATION**

Grooved PEEK ferrules. .... page 63

# Reducing ferrules



## VALCO FITTINGS

Reducing ferrules provide an inexpensive way to connect small temporary transfer lines to valves or fittings designed for larger tubing. For long term use, we recommend our reducing unions, internal reducers (IZRs), or external reducers (EZR), as appropriate.



**Internal ZDV** (zero dead volume) reducing ferrules are designed for use with all standard Valco internal style fittings – that is, those with a male nut and female fitting detail. The ferrule features an integral pilot which fills the pilot cavity (the space between the end of the ferrule and the bottom of the detail), yielding a zero dead volume fitting.

**External ZDV** reducing ferrules are designed for use with all standard external style fittings – that is, those with a female nut and a male fitting detail. This ferrule has a slightly longer pilot than the internal version, to accommodate the longer external detail. The result is a zero dead volume fitting. A single groove indicates that the ferrule has the longer pilot and is for use in an external detail.



**Standard** reducing ferrules can be used where mixing is not a problem, such as with liquid or gas delivery. A 1/16" to 1/32" ferrule of this style is simply a 1/16" ferrule with a 1/32" hole.



**Internal reducing ferrule (ZRF)**

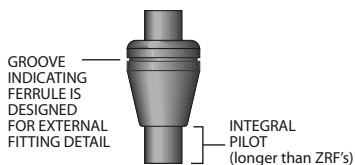

**External reducing ferrule (EZRF)**



**Standard reducing ferrule (RF)**

### Internal reducing ferrules

Use these ferrules in internal type fitting details, with nuts that have external threads.

	Prod No	Prod No	Prod No	
Package of 5:	<b>PTFE, Glass-filled</b>	<b>PEEK</b>	<b>Polyimide, Valcon</b>	
	1/16" to 1/32"	ZRF1.5TFG-5	ZRF1.5PK-5	ZRF1.5V-5
	1/8" to 1/32"	ZRF2.5TFG-5	ZRF2.5PK-5	ZRF2.5V-5
	1/8" to 1/16"	ZRF21TFG-5	ZRF21PK-5	ZRF21V-5
	1/4" to 1/16"	ZRF41TFG-5	ZRF41PK-5	ZRF41V-5
	1/4" to 1/8"	ZRF42TFG-5	ZRF42PK-5	ZRF42V-5
Package of 5:	<b>CTFE</b>	<b>Polyimide, Virgin</b>		
	1/16" to 1/32"	ZRF1.5KF-5	ZRF1.5V1-5	
	1/8" to 1/32"	ZRF2.5KF-5	ZRF2.5V1-5	
	1/8" to 1/16"	ZRF21KF-5	ZRF21V1-5	
	1/4" to 1/16"	ZRF41KF-5	ZRF41V1-5	
	1/4" to 1/8"	ZRF42KF-5	ZRF42V1-5	



**PEEK reducing ferrule and internal nut**  
(Order nut separately.)

#### TECH TIP

Fittings for **360 micron** tubing are available on pages 57-58.

#### TECH TIP

If you are doing resistive heating of traps or columns, note that our virgin polyimide reducing ferrules are effective electrical insulators.

Virgin polyimide is produced as **VespeI®**.

#### MORE INFORMATION

Internal reducers (IZR)..... page 38  
External reducers (EZR) ..... 39  
Ferrule removal kits.... 16

For 1/16" and 1/32" reducing ferrules with smaller ODs for use with fused silica, see the FS and FSR adapters on pages 16-17.



**OPTION**

Available in Virgin Polyimide.

**External reducing ferrules**

Use these ferrules in external type fitting details, with nuts that have internal threads.

	<i>Prod No</i>	<i>Prod No</i>	<i>Prod No</i>
<i>Package of 5:</i>	<b>PTFE, Glass-filled</b>	<b>PEEK</b>	<b>Polyimide, Valcon</b>
1/16" to 1/32"	EZRF1.5TFG-5	EZRF1.5PK-5	EZRF1.5V-5
1/8" to 1/32"	EZRF2.5TFG-5	EZRF2.5PK-5	EZRF2.5V-5
1/8" to 1/16"	EZRF21TFG-5	EZRF21PK-5	EZRF21V-5
1/4" to 1/16"	EZRF41TFG-5	EZRF41PK-5	EZRF41V-5
1/4" to 1/8"	EZRF42TFG-5	EZRF42PK-5	EZRF42V-5
<i>Package of 5:</i>	<b>CTFE</b>		
1/16" to 1/32"	EZRF1.5KF-5		
1/8" to 1/32"	EZRF2.5KF-5		
1/8" to 1/16"	EZRF21KF-5		
1/4" to 1/16"	EZRF41KF-5		
1/4" to 1/8"	EZRF42KF-5		



**PEEK reducing ferrule and external nut**  
(Order nut separately.)



**Standard reducing ferrules**

Use these ferrules for bulk distribution only, since the resulting connection will not be zero dead volume. These ferrules can be used in either internal or external type fitting details.

	<i>Prod No</i>	<i>Prod No</i>	<i>Prod No</i>
<i>Package of 5:</i>	<b>PTFE, Glass-filled</b>	<b>PEEK</b>	<b>Polyimide, Valcon</b>
1/16" to 1/32"	RF1.5TFG-5	RF1.5PK-5	RF1.5V-5
1/8" to 1/32"	RF2.5TFG-5	RF2.5PK-5	RF2.5V-5
1/8" to 1/16"	RF21TFG-5	RF21PK-5	RF21V-5
1/4" to 1/16"	RF41TFG-5	RF41PK-5	RF41V-5
1/4" to 1/8"	RF42TFG-5	RF42PK-5	RF42V-5
<i>Package of 5:</i>	<b>CTFE</b>		
1/16" to 1/32"	RF1.5KF-5		
1/8" to 1/32"	RF2.5KF-5		
1/8" to 1/16"	RF21KF-5		
1/4" to 1/16"	RF41KF-5		
1/4" to 1/8"	RF42KF-5		

**CONVERSIONS**

- 0.25 mm = .010"
- 0.50 mm = .020"
- 0.75 mm = .030"
- 1.0 mm = .040"
- 1.5 mm = .060"
- 2.0 mm = .080"
- 4.6 mm = .180"
- 6.0 mm = .236"
- 6.4 mm = .253"
- 7.0 mm = .275"
- 10.0 mm = .400"
- 27.0 mm = 1.08"
- 1/32" = 0.8 mm
- 1/16" = 1.6 mm
- 1/8" = 3.2 mm
- 1/4" = 6.4 mm
- 3/8" = 9.5 mm
- 1/2" = 12.7 mm

# Fused silica adapters

## VALCO FITTINGS

Fused silica adapters are available in Valcon polyimide for use up to 350°C and in PEEK for lower temperature applications (up to 175°C). Valcon polyimide is a unique graphite-reinforced composite, specially prepared to maximize mechanical stability at high temperatures. Small blocks are subjected to extreme loads by a process known as hot isostatic pressing, with individual

ferrules subsequently machined from these blocks. The result of this two-step process is a fused silica adapter with high temperature stability which far exceeds that of parts produced by conventional molding. Note that the determining factor in adapter size selection is the fused silica tubing's outer diameter, or OD. Typical ODs for common columns are included in the product number tables.



### One piece fused silica adapter (FS)

The one piece FS adapter, essentially a reducing ferrule, is recommended for use in fittings where the polyimide ferrule will not be removed. Connections are made and disconnected by loosening the fitting nut and sliding the tube out.

Package of 5:

	Polyimide, Valcon Prod No	PEEK Prod No	Polyimide, Virgin Prod No
<b>1/32" Adapters</b>			
Tubing OD:			
< 0.20 mm	FS.2-5	FS.2PK-5	—
0.20 ≤ 0.25 mm	FS.25-5	FS.25PK-5	FS.25V1-5
0.25 ≤ 0.36 mm	FS.36-5	FS.36PK-5	—
0.36 ≤ 0.40 mm	FS.4-5	FS.4PK-5	FS.4V1-5
0.40 ≤ 0.50 mm	FS.5-5	FS.5PK-5	FS.5V1-5
0.50 ≤ 0.80 mm	ZF.5V-5	ZF.5PK-5	ZF.5V1-5

### 1/16" Adapters

	Polyimide, Valcon Prod No	PEEK Prod No	Polyimide, Virgin Prod No
Tubing OD:			
< 0.20 mm	FS1.2-5	FS1.2PK-5	FS1.2V1-5
0.20 ≤ 0.25 mm	FS1.25-5	FS1.25PK-5	FS1.25V1-5
0.25 ≤ 0.30 mm	FS1.3-5	FS1.3PK-5	FS1.3V1-5
0.30 ≤ 0.40 mm	FS1.4-5	FS1.4PK-5	FS1.4V1-5
0.40 ≤ 0.50 mm	FS1.5-5	FS1.5PK-5	FS1.5V1-5
0.50 ≤ 0.80 mm	FS1.8-5	FS1.8PK-5	FS1.8V1-5
0.80 ≤ 0.90 mm	FS1.9-5	FS1.9PK-5	FS1.9V1-5
0.90 ≤ 1.0 mm	FS11.0-5	FS11.0PK-5	FS11.0V1-5



### OPTIONS

Other sizes may be available in some materials. Contact Tech Support for availability.

### TEMPERATURE RATINGS

Polyimide adapters can be used at temperatures up to 350°C.

PEEK adapters are not recommended for use above 175°C.

### TECH TIP

Virgin polyimide adapters are effective electrical insulators, making them the ideal choice for capillary electrophoresis.

Virgin polyimide is produced as Vespel®.

### TECH TIP

If a fused silica tube breaks off in a through-type union, remove the nuts and the tube opposite the broken one. Clear the fitting by passing a drill or wire of the appropriate diameter into the unbroken side and through the center of the fitting.

Our **ferrule removal kit**, left, can be used to remove ferrules from all types of fittings.

### Ferrule removal kits

Remove polymeric ferrules stuck in fitting details. One version is for 1/32" and 360 micron ferrules, and the other version is for 1/16" and 1/8" ferrules.




Prod No

For 360 µm, FS, and 1/32"  
For 1/16" and 1/8"

FRK1  
FRK2

### WHICH ADAPTER FOR WHICH COLUMN?

Column ID	Typical column OD	1/32" adapter	1/16" adapter
< 0.20 mm	0.25 mm	FS.25	FS1.25
0.25 mm	0.4 mm	FS.4	FS1.4
0.32 mm	0.5 mm	FS.5	FS1.5
0.53 mm	0.8 mm	ZF.5V	FS1.8



**Removable fused silica adapters (FSR)**

The FSR adapter is the only adapter recommended for use in valves. It consists of a liner which slides over the fused silica tubing and a ferrule which makes up on the liner. The liner has an enlarged diameter at one end which is captured by the nut, so the liner and the tube within it are removed as the nut is unscrewed from the valve. The 1/16" FSR adapter includes a special counterbored 1/16" nut. The 1/32" FSR adapter uses a standard Valco 1/32" nut.

Package of 5:

**Polyimide, Valcon**  
Prod No

**1/32" removable adapters**

<i>Tubing OD:</i>	
< 0.25 mm	FSR.25-5
0.30 ≤ 0.35 mm	FSR.3-5
0.35 ≤ 0.40 mm	FSR.4-5
0.40 ≤ 0.50 mm	FSR.5-5

**1/32" replacement liners**

<i>Tubing OD:</i>	
< 0.25 mm	FSL.25-5
0.25 ≤ 0.40 mm	FSL.4-5
0.40 ≤ 0.50 mm	FSL.5-5

Package of 5:

**Polyimide, Valcon PEEK**  
Prod No Prod No

**1/16" removable adapters**

<i>Tubing OD:</i>		
< 0.15 mm	—	FS1R.15PK-5
< 0.20 mm	FS1R.2-5	FS1R.2PK-5
0.20 ≤ 0.40 mm	FS1R.4-5	FS1R.4PK-5
0.40 ≤ 0.50 mm	FS1R.5-5	FS1R.5PK-5
0.50 ≤ 0.80 mm	FS1R.8-5	FS1R.8PK-5
0.90 ≤ 1.0 mm	FS1R1.0-5	FS1R1.0PK-5

**1/16" replacement liners**

<i>Tubing OD:</i>		
< 0.15 mm	—	FS1L.15PK-5
< 0.20 mm	FS1L.2-5	FS1L.2PK-5
0.20 ≤ 0.40 mm	FS1L.4-5	FS1L.4PK-5
0.40 ≤ 0.50 mm	FS1L.5-5	FS1L.5PK-5
0.50 ≤ 0.80 mm	FS1L.8-5	FS1L.8PK-5
0.90 ≤ 1.0 mm	FS1L1.0-5	FS1L1.0PK-5

**MORE INFORMATION**

Fused silica  
Unions . . . . . pages 19, 61  
Fittings . . . . . 16-21, 58-61  
A pin vise and drill index are useful for enlarging the inner diameters of the FS adapters.  
Pin vise and drill index . . . . . 55

**CONVERSIONS**


100 µm	= .004"
150 µm	= .006"
0.25 mm	= .010"
0.50 mm	= .020"
0.75 mm	= .030"
1.0 mm	= .040"
1.5 mm	= .060"
2.0 mm	= .080"
4.6 mm	= .180"
6.0 mm	= .236"
6.4 mm	= .253"
7.0 mm	= .275"
10.0 mm	= .400"
27.0 mm	= 1.08"
1/32"	= 0.8 mm
1/16"	= 1.6 mm
1/8"	= 3.2 mm
1/4"	= 6.4 mm
3/8"	= 9.5 mm
1/2"	= 12.7 mm

**REPLACEMENT PARTS**  
**Ferrules**

(package of 5)	
1/32" Polyimide	ZF.5V-5
1/16" Polyimide	ZF1V-5
(package of 10)	
1/16" PEEK	ZF1PK-10

**Nuts**

(package of 10)	
1/32" SS	ZN.5-10
Special nuts for FSRs:	
1/16" SS	ZCN1-10
1/16" SS long	LZCN1-10

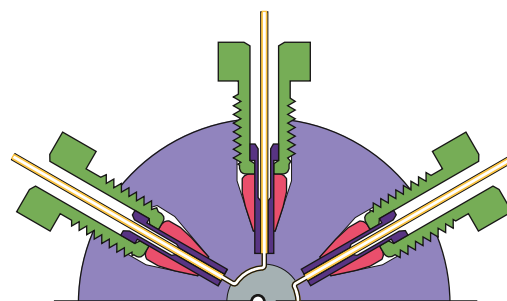

Removable FSR adapters in a valve

## VALCO FITTINGS

### Injector nut for Agilent 6850, 6890, 7820, 7890, and 5890, Series I and II

This self-compensating nut is a direct replacement for the standard nut on the split/splitless injectors of the Agilent GCs listed above. This retrofit offers enhanced ferrule reusability and temperature stability, resulting in fingertight leak-free connections over the full programmed temperature range of mass spectrometry and gas chromatography.


The design of our fused silica fittings ensures stable, leak-free connections at temperatures up to 400°C, and undistorted ferrules that are easily removed and reused. Columns may be changed without the risk of the leaks which can devastate systems such as mass spectrometers or atomic emission detectors. This is accomplished with a spring-loaded self-compensating nut which provides a constant sealing force as the temperature varies.

To use this nut, the split/splitless disk must also be upgraded; the new disk will also work with older HP nuts and ferrules.



	<i>Prod No</i>
Injector nut system	FSZA-HP
Includes nut and seal disk	
Replacement parts	
Self-compensating nut	FSZNA-HP
HP-5890 split/splitless seal disk	SEAL1-HP
Reusable ferrules, pkg/10 *	
Column ID: .20 –.25 mm	FS1.35-R10
.32 mm	FS1.45-R10
.53 mm	FS1.75-R10

\*These reusable ferrules seal at the tip, and are different from standard ferrules.

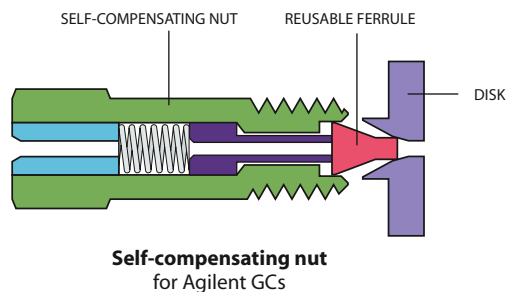

### Replacement ferrules for injector nuts, above

These reusable ferrules seal at the tip, and are different from standard ferrules. For use with FSZNA-HP nuts above.

<i>Package of 10:</i>	<i>Prod No</i>
Column ID: .20 –.25 mm	FS1.35-R10
.32 mm	FS1.45-R10
.53 mm	FS1.75-R10



### CONVERSIONS


100 µm	=	.004"
150 µm	=	.006"
0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm



### 1/32" Ultra low mass external unions

The 1/32" external union is specially designed for use with capillary columns in GC. It has very low mass and does not require wrenches to seal. Use only with one-piece fused silica adapters, since metal ferrules will distort the detail. Order fused silica adapters separately, below.

Bore	Prod No
0.25 mm	EU.5
0.50 mm	EU.5L
1/32"	EU.5T



**1/32" external union**  
for use with capillary columns in GC

### 1/32" One piece fused silica adapters (FS)

The 1/32" one piece FS adapter is recommended for use in 1/32" ultra low mass external unions, and for use in fittings where the polyimide ferrule will not be removed. Connections are made and disconnected by loosening the fitting nut and sliding the tube out.

Fused silica adapters are available in Valcon polyimide for use up to 350°C and in PEEK for lower temperature applications (up to 175°C). Valcon polyimide is a unique graphite-reinforced composite, specially prepared to maximize mechanical stability at high temperatures. Small blocks are subjected to extreme loads by a process known as hot isostatic pressing, with individual ferrules subsequently machined from these blocks. The result of this two-step process is a fused silica adapter with high temperature stability which far exceeds that of parts produced by conventional molding.

Note that the determining factor in adapter size selection is the fused silica tubing's outer diameter, or OD. Typical ODs for common columns are included in the product number tables.

Package of 5:

	<b>Polyimide, Valcon</b> Prod No	<b>PEEK</b> Prod No	<b>Polyimide, Virgin</b> Prod No
Tubing OD:			
< 0.20 mm	FS.2-5	FS.2PK-5	—
0.20 ≤ 0.25 mm	FS.25-5	FS.25PK-5	FS.25V1-5
0.25 ≤ 0.36 mm	FS.36-5	FS.36PK-5	—
0.36 ≤ 0.40 mm	FS.4-5	FS.4PK-5	FS.4V1-5
0.40 ≤ 0.50 mm	FS.5-5	FS.5PK-5	FS.5V1-5
0.50 ≤ 0.80 mm	ZF.5V-5	ZF.5PK-5	ZF.5V1-5

# Fused silica adapters


## VALCO FITTINGS

### Fused silica make-up adapters

The fused silica make-up adapter connects a fused silica capillary column to a valve or detector while adding a make-up gas. In the reverse mode it works like a splitter, without the uneven or erratic split seen with basic tees. Two lengths are available. Order 1/32" fused silica adapter ferrules separately (see box on facing page).



Description	Length	Bore	Prod No
1/16" to 1/32"	1.5"	0.5 mm	FSMUAS1.5M
	1.5"	0.75 mm	FSMUAS1.5
	1.5"	1.0 mm	FSMUAS1.5L
	3.5"	0.75 mm	FSMUA1.5

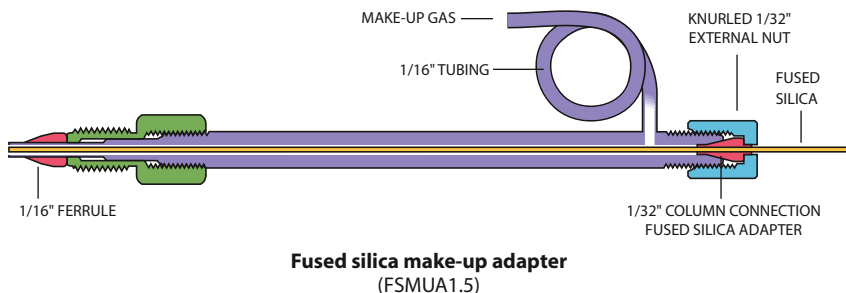

### CONVERSIONS


100 μm	=	.004"
150 μm	=	.006"
0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm



**Internal to external reducer/adapters**

Internal fittings provide the smallest possible fitting volume. But there are situations, such as when you're using graphite ferrules which tend to become lodged in internal details, when an external fitting might be more desirable. A typical situation of that nature is the connection of a fused silica capillary to a valve. Our unique design permits the 1/32" nut to be tightened or loosened without affecting the 1/16" connection. Order 1/32" fused silica adapter ferrules separately (see box below).

Description	Bore	Prod No
1/16" to 1/32"	0.25 mm	IZERA1.5C
	0.5 mm	IZERA1.5M
	1.0 mm	IZERA1.5

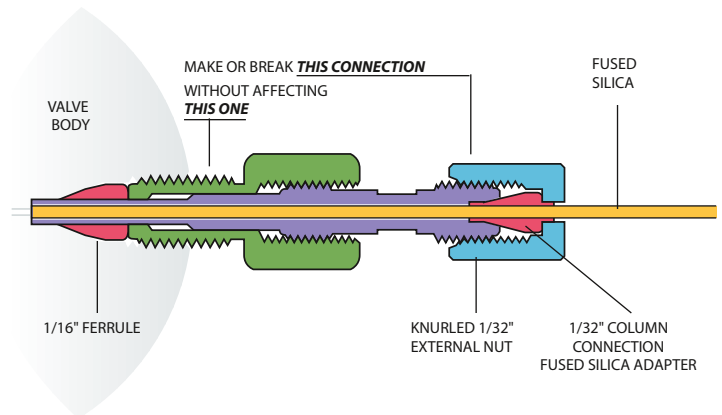

**Internal to external FS adapter (IZERA1.5)**  
shown installed in a valve

**CAUTION**

Polymeric ferrules are strongly recommended for 1/16" and 1/32" external details. Metal ferrules may distort the fitting.

**MORE INFORMATION**

1/32" fused silica adapter ferrules..... page 19

**1/32" FUSED SILICA FERRULES**  
(package of 5)

Tubing OD:		
	≤ 0.25 mm	FS.25-5
0.25 mm	≤ 0.4 mm	FS.4-5
0.4 mm	≤ 0.5 mm	FS.5-5
0.5 mm	≤ 0.8 mm	ZF.5V-5

**VALCO FITTINGS**


Micro-unions, -tees, -crosses, and -Y's have a unique two-piece design which allows us to provide an extremely small bore in a conventional ferrule and nut fitting. The actual connection area is separated from the nut threads, with the ferrule detail in a metal or polymer insert and the threads machined into a stainless steel or polymer ring. Since the insert has a much smaller diameter than a standard one-piece fitting, it can be drilled with much shorter tools; and, since a shorter drill has less tendency to wander or break, holes as small as .006" (0.15 mm) can be machined with the same high degree of concentricity found in all Valco fittings.

Valco microvolume fittings make it possible to couple 100 micron ID capillary GC, HPLC, or CZE columns without special nuts and ferrules.


A stainless ring with one of the plastic inserts provides electrical insulation within the insert, while the PEEK ring achieves total isolation.

The ring containing the threads is made from PEEK or stainless steel. Inserts are made of stainless steel, Hastelloy C, Titanium, PEEK, or CTFE. PEEK rings are not as robust as stainless steel, and are not usable above 75°C. The stainless steel ring with a metal insert can operate at up to 10,000 psi (liquid) for HPLC or SFC.

All standard Valco zero dead volume reducing ferrules (ZRF, FS, and FSR) will work in these fittings. They are uniquely designed to fill the void between the fitting pilot and the smaller tubing OD, eliminating any dead volume in the fitting. (Reducing ferrules such as Valco's RF series should be avoided, since they leave dead volume.)

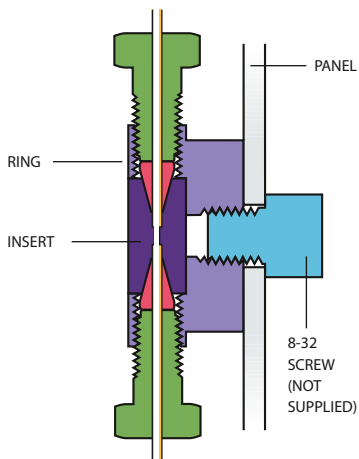

**Panel mounting**

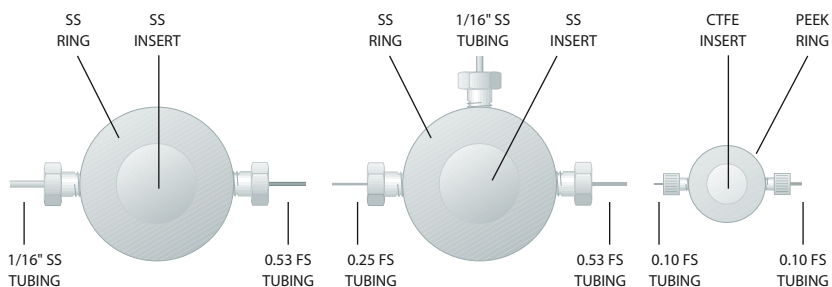

**Stainless to fused silica union**  
1/16" fittings

**Make-up adapter**  
1/16" fittings

**CZE union**  
1/32" fittings

**MORE INFORMATION**

- FS fused silica adapters. . . . . page 16
- FSR fused silica adapters. . . . . 17
- ZRF internal reducing ferrules . . . . . 14

- Ferrules
- Metal. . . . . 12
- Polymeric . . . . . 13

**CONVERSIONS**

- 100 µm = .004"
- 150 µm = .006"
- 0.25 mm = .010"
- 0.50 mm = .020"
- 0.75 mm = .030"
- 1.0 mm = .040"
- 1.5 mm = .060"
- 2.0 mm = .080"
- 4.6 mm = .180"
- 6.0 mm = .236"
- 6.4 mm = .253"
- 7.0 mm = .275"
- 10.0 mm = .400"
- 27.0 mm = 1.08"
- 1/32" = 0.8 mm
- 1/16" = 1.6 mm
- 1/8" = 3.2 mm
- 1/4" = 6.4 mm
- 3/8" = 9.5 mm
- 1/2" = 12.7 mm



**1/32" Microvolume connectors**

Includes ring, nuts, and ferrules. With metal inserts: ferrules are the same material as the insert, and ring and nuts are stainless steel. With polymer inserts: ferrules are the same material as the insert, and ring and nuts are PEEK.

Insert Material:	Stainless steel	Hastelloy C	Titanium	PEEK	CTFE
	<i>Prod No</i>	<i>Prod No</i>	<i>Prod No</i>	<i>Prod No</i>	<i>Prod No</i>
<b>0.15 mm bore</b>					
Union	MU.5XCS6	MU.5XCHC	MU.5XCTI	MU.5XCPK	MU.5XCKF
Tee	MT.5XCS6	MT.5XCHC	MT.5XCTI	MT.5XCPK	MT.5XCKF
Y	MY.5XCS6	MY.5XCHC	MY.5XCTI	MY.5XCPK	MY.5XCKF
Cross	MX.5XCS6	MX.5XCHC	MX.5XCTI	MX.5XCPK	MX.5XCKF
<b>0.25 mm bore</b>					
Union	MU.5CS6	MU.5CHC	MU.5CTI	MU.5CPK	MU.5CKF
Tee	MT.5CS6	MT.5CHC	MT.5CTI	MT.5CPK	MT.5CKF
Y	MY.5CS6	MY.5CHC	MY.5CTI	MY.5CPK	MY.5CKF
Cross	MX.5CS6	MX.5CHC	MX.5CTI	MX.5CPK	MX.5CKF

**1/16" Microvolume connectors**

Includes ring, nuts, and ferrules. With metal inserts: ferrules are the same material as the insert, and ring and nuts are stainless steel. With polymer inserts: ferrules are the same material as the insert, and ring and nuts are PEEK.

Insert Material:	Stainless steel	Hastelloy C	Titanium	PEEK	CTFE
	<i>Prod No</i>	<i>Prod No</i>	<i>Prod No</i>	<i>Prod No</i>	<i>Prod No</i>
<b>0.15 mm bore</b>					
Union	MU1XCS6	MU1XCHC	MU1XCTI	MU1XCPK	MU1XCKF
Tee	MT1XCS6	MT1XCHC	MT1XCTI	MT1XCPK	MT1XCKF
Y	MY1XCS6	MY1XCHC	MY1XCTI	MY1XCPK	MY1XCKF
Cross	MX1XCS6	MX1XCHC	MX1XCTI	MX1XCPK	MX1XCKF
<b>0.25 mm bore</b>					
Union	MU1CS6	MU1CHC	MU1CTI	MU1CPK	MU1CKF
Tee	MT1CS6	MT1CHC	MT1CTI	MT1CPK	MT1CKF
Y	MY1CS6	MY1CHC	MY1CTI	MY1CPK	MY1CKF
Cross	MX1CS6	MX1CHC	MX1CTI	MX1CPK	MX1CKF

**Replacement components**

<i>Description</i>	1/32"	1/16"
	<b>connectors</b> <i>Prod No</i>	<b>connectors</b> <i>Prod No</i>
SS ring for union, tee, or cross	MRX.5S6	MRX1S6
SS ring for Y	MRY.5S6	MRY1S6
PEEK ring for union, tee, or cross	MRX.5PK	MRX1PK
PEEK ring for Y	MRY.5PK	MRY1PK
Nuts for SS ring	ZN.5	ZN1
Nuts for PEEK ring	ZN.5FPK	ZN1FPK

Inserts for any connector:

To order an insert, add an "I" after the "M" in the product number.

For example, to order an insert for a 1/16" microvolume union MU1CS6, order part number MIU1CS6.

**OPTIONS**

0.50, 0.75, and 1.0 mm bores are available in most materials and configurations.

**NANOBORE CONNECTIONS**

For 0.10 mm (100 µm) bore fittings, see pages 57-61.

## VALCO FITTINGS

Unions join two pieces of tubing of the same OD. Select the union with the bore that matches the ID of the tubing. If the IDs are different, choose the union with a bore which matches the smaller tube bore. Standard material is 300 series stainless steel.

- **Internal** unions have female threads and a fitting detail for zero volume fittings. The nuts have male (external) threads.
- **External** unions have male threads, requiring a nut with internal threads.
- **External/internal** unions have male threads on one end and female threads on the other, for connecting a standard zero dead volume fitting to an existing tube which already has an external nut made up on it.

Internal fittings are almost always the best with tubing of 1/8" OD or smaller. They make a stronger connection and offer the lower volume necessary for high performance instrumentation. Also, because 1/16" external fittings have very thin, easily distorted walls, they are not as durable as 1/16" internal fittings. In sizes larger than 1/8", external fittings are generally easier to make up because of less thread friction.




**Bulkhead** versions can be mounted through an instrument panel or on a bracket. The fitting body is undercut so that it bites into the panel when the mounting nut is tightened, eliminating the need for a lock washer. An O-ring can be installed between the body and the panel to allow operation in purged environments. Typically the mounting nut goes inside the instrument, so that the long threaded portion will be out of sight. In the external/internal bulkhead unions, the mounting nut is on the side with the Valco internal fitting.

### TECH TIP

Filtering capability can be added to a union by inserting a screen or frit into it before making up the fittings. However, when a fitting detail has a screen or frit in it, the pilot depth is reduced, so that the ferrule makes up closer to the tube end than it otherwise would. If that tube is used in any other Valco fitting, it will introduce unswept volume. Our filter design takes this into account, allowing our fittings to remain truly interchangeable.

Filters . . . . . pages 48-52

Frits and screens. . . . . 53

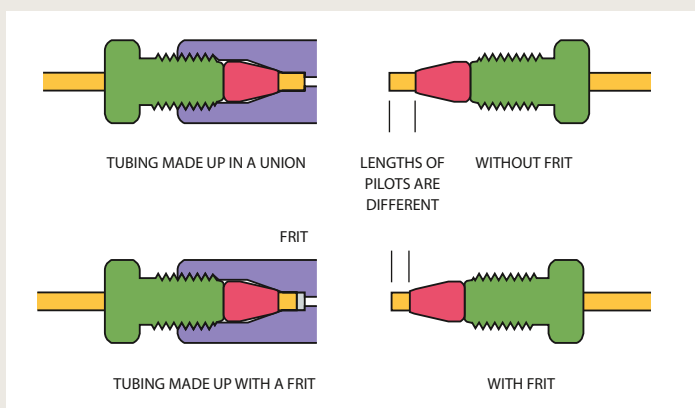


### CONVERSIONS

0.25 mm = .010"
0.50 mm = .020"
0.75 mm = .030"
1.0 mm = .040"
1.5 mm = .060"
2.0 mm = .080"
4.6 mm = .180"
6.0 mm = .236"
6.4 mm = .253"
7.0 mm = .275"
10.0 mm = .400"
27.0 mm = 1.08"
1/32" = 0.8 mm
1/16" = 1.6 mm
1/8" = 3.2 mm
1/4" = 6.4 mm
3/8" = 9.5 mm
1/2" = 12.7 mm

## Zero Volume vs. Zero Dead Volume

A true zero volume fitting is one in which no part of the fitting actually becomes a part of the flow path. The only Valco fittings which fit this description are our through-bore unions, which allow tubing to butt end-to-end. (So these are only zero volume if the tube ends are perfectly square.)

All other fittings are designed with zero *dead* volume: that is, there is no volume introduced by the fitting which is not cleanly swept.

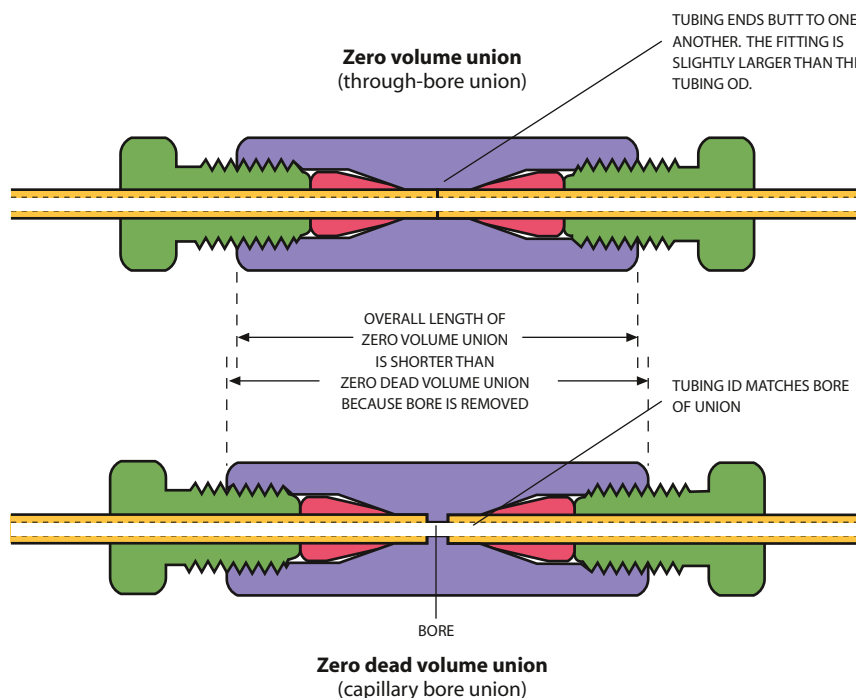

### TECH TIP Through-bore Union Installation

Because the tubing will pass all the way through a through-bore union, we suggest making up the first tube in a standard Valco fitting to establish the proper length of tubing extending beyond the ferrule. Install this made-up connection in the through-bore union; then the second tube can be butted against it for a zero volume connection.

### MORE INFORMATION

Reducing unions to connect two tubes with different ODs . . . . p 28-31  
Unions with 1/4-28 fittings . . . . 72-73

## VALCO FITTINGS


### Internal unions – stainless steel

Standard material is 300 series stainless. Also available in Hastelloy C, gold-plated stainless, and titanium.

#### Standard internal unions

##### Tubing

OD	Bore	Prod No
1/32"	0.15 mm	ZU.5XC
	0.25 mm	ZU.5
	0.50 mm	ZU.5L
	1/32"	ZU.5T
1/16"	0.15 mm	ZU1XC
	0.25 mm	ZU1C
	0.50 mm	ZU1M
	0.75 mm	ZU1
	1.0 mm	ZU1L
	1/16"	ZU1T
1/8"	0.75 mm	ZU2
	2.0 mm	ZU2L
	1/8"	ZU2T
1/4"	0.75 mm	ZU4
	4.6 mm	ZU4L
	1/4"	ZU4T

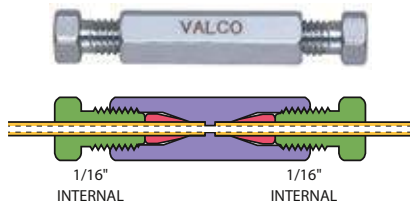

#### Internal union – metal

Standard bore version (ZU1)

Ends of tubing seat squarely at bottoms of fitting details

#### Bulkhead internal unions

##### Tubing

OD	Bore	Prod No	Bulkhead panel hole diameter
1/32"	0.15 mm	ZBU.5XC	5/16"
	0.25 mm	ZBU.5	5/16"
	0.50 mm	ZBU.5L	5/16"
	1/32"	ZBU.5T	5/16"
1/16"	0.15 mm	ZBU1XC	5/16"
	0.25 mm	ZBU1C	5/16"
	0.50 mm	ZBU1M	5/16"
	0.75 mm	ZBU1	5/16"
	1.0 mm	ZBU1L	5/16"
	1/16"	ZBU1T	5/16"
1/8"	0.75 mm	ZBU2	7/16"
	2.0 mm	ZBU2L	7/16"
	1/8"	ZBU2T	7/16"
1/4"	0.75 mm	ZBU4	5/8"
	4.6 mm	ZBU4L	5/8"
	1/4"	ZBU4T	5/8"



**Bulkhead internal union – metal**  
(ZBU1)

#### MORE INFORMATION


Internal unions, high pressure PEEK . . . p 57, 65

#### For special materials and/or smaller bores:

Microvolume connectors offer a complete range of 1/32" and 1/16" unions in various metals and polymers, with bore sizes ranging from .006" (0.15 mm) to .040" (1.0 mm). Refer to pages 22-23.

#### CONVERSIONS

0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm
5/16"	= .312"	= 7.9 mm
3/8"	= .375"	= 9.5 mm
7/16"	= .437"	= 11.1 mm

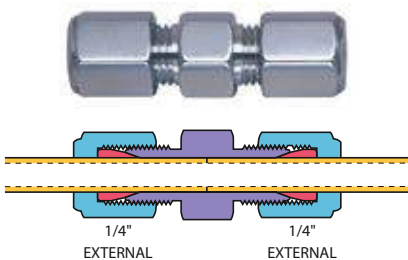

1/4" EXTERNAL 1/4" EXTERNAL


**External union**

Through-bore version (EU4T)

Ends of tubing butt together




**Bulkhead external union (EBU2L)**



**1/32" external union (EU.5)**

For use with GC capillary columns

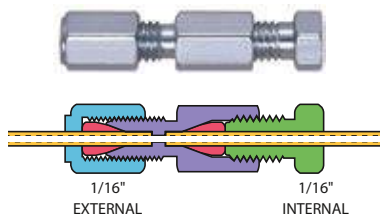

**External/internal union Standard bore (EZU1)**

Adapts existing external fittings to Valco zero volume internal fittings

**External unions**

Standard material is 300 series stainless. Also available in Hastelloy C and gold-plated stainless.

*Note:* Because 1/16" external fittings have very thin, easily distorted walls, they are not as durable as 1/16" internal fittings. We recommend the use of external/internal unions (*below*) when connecting to an installed external nut.

Tubing OD	Bore	Standard Prod No	Bulkhead Prod No	Bulkhead panel hole diameter
1/16"	See note above			
1/8"	1.0 mm	EU2	—	—
	2.0 mm	EU2L	EBU2L	5/16"
	1/8"	EU2T	EBU2T	5/16"
1/4"	2.0 mm	EU4	EBU4	7/16"
	4.6 mm	EU4L	EBU4L	7/16"
	1/4"	EU4T	EBU4T	7/16"

**External unions – 1/32" ultra low mass**

The 1/32" external union is specially designed for use with capillary columns in GC. It is very low mass and does not require wrenches to seal. Use *only* with one-piece fused silica adapters, since metal ferrules will distort the detail. Order fused silica adapters separately (*page 16*). Standard material is 300 series stainless.

Bore	Prod No
0.25 mm	EU.5
0.50 mm	EU.5L
1/32"	EU.5T

**External/internal unions**

Standard material is 300 series stainless. Also available in Hastelloy C and gold-plated stainless.

Tubing OD	Bore	Standard Prod No	Bulkhead Prod No	Bulkhead panel hole diameter
1/32"	0.25 mm	EZU.5	—	—
	0.50 mm	EZU.5L	—	—
1/16"	0.25 mm	EZU1C	EZBU1C	5/16"
	0.50 mm	EZU1M	EZBU1M	5/16"
	0.75 mm	EZU1	EZBU1	5/16"
	1/16"	EZU1T	EZBU1T	5/16"
1/8"	1.0 mm	EZU2	EZBU2	7/16"
	2.0 mm	EZU2L	EZBU2L	7/16"
	1/8"	EZU2T	EZBU2T	7/16"



**Bulkhead external/internal union (EZBU1)**

**TECH TIP**

1/16", 1/8", and 1/4" external Valco fitting components are compatible with Parker and Swagelok fittings.

# Reducing unions

## VALCO FITTINGS

Reducing unions join two tubes of different outside diameters. Standard material is 300 series stainless.

- Internal reducing unions have female threads and a fitting detail for zero volume fittings. The nuts have male (external) threads.
- External reducing unions have male threads, requiring a nut with internal threads.
- External/internal and internal/external reducing unions have male threads on one end and female threads on the other. We recommend the use of external/internal fittings when connecting to an existing external nut.

Internal fittings are almost always the best with tubing of 1/8" OD or smaller. They make a stronger connection and offer the lower volume necessary for high performance instrumentation. Also, because 1/16" external fittings have


very thin, easily distorted walls, they are not as durable as 1/16" internal fittings. In sizes larger than 1/8", external fittings are generally easier to make up because of less thread friction.

**Bulkhead** versions can be mounted through an instrument panel or on a bracket. The fitting body is undercut so that it bites into the panel when the mounting nut is tightened, eliminating the need for a lock washer. An O-ring can be installed between the body and the panel to allow operation in purged environments. Typically the mounting nut goes inside the instrument, so that the long threaded portion will be out of sight. In the external/internal bulkhead unions, the mounting nut is on the side with the Valco internal fitting.




### DEAD VOLUME


"Dead volume" is created in obvious situations such as the one shown.

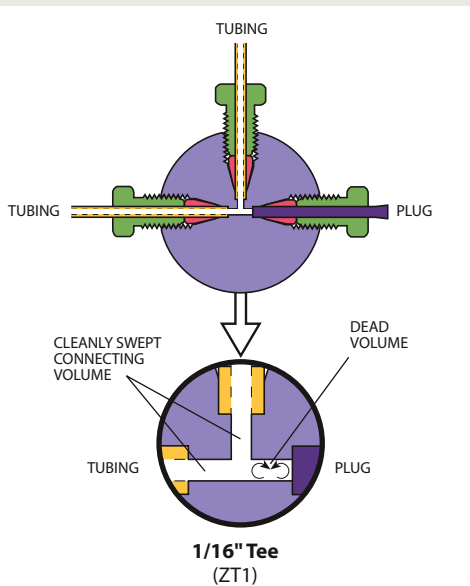

### UNSWEPT VOLUME

Even in connections which are by most definitions "zero dead volume", unswept volume may be created where large ID transitions occur. The amount of mixing depends on the amount of mismatch in the IDs.

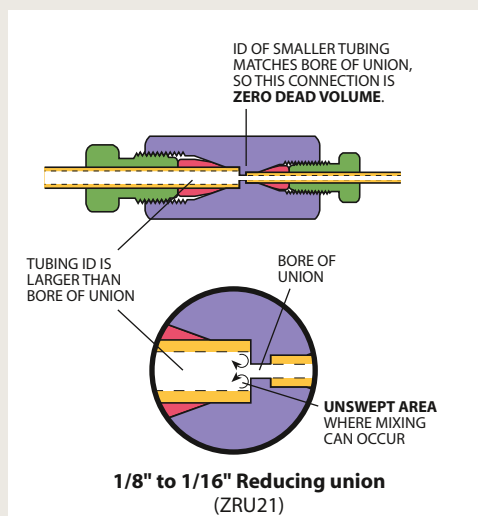

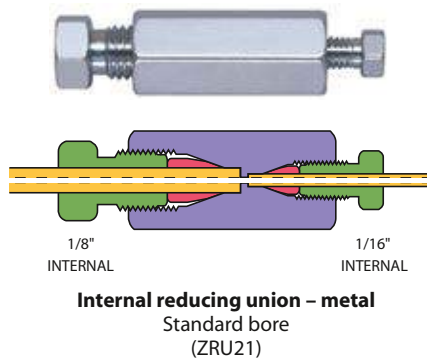

**Internal reducing unions – stainless steel**

These unions connect two sizes of tubing, using zero dead volume internal fittings on each end. In the bulkhead version, the bulkhead nut is on the side with smaller tubing.

Standard material is 300 series stainless. Also available in Hastelloy C, gold-plated stainless, and titanium.

**Standard internal reducing unions**

Tube OD	Bore	Prod No
1/16" to 1/32"	0.15 mm	ZRU1.5XC
	0.25 mm	ZRU1.5
	0.50 mm	ZRU1.5L
	1/32"	ZRU1.5T
1/8" to 1/32"	0.25 mm	ZRU2.5
	0.50 mm	ZRU2.5L
	1/32"	ZRU2.5T
1/8" to 1/16"	0.25 mm	ZRU21C
	0.75 mm	ZRU21
	1/16"	ZRU21T
1/4" to 1/16"	0.25 mm	ZRU41C
	0.75 mm	ZRU41
	1/16"	ZRU41T
1/4" to 1/8"	0.75 mm	ZRU42
	2.0 mm	ZRU42L
	1/8"	ZRU42T

**Bulkhead internal reducing unions**

Tube OD	Bore	Prod No	Bulkhead panel hole diameter
1/16" to 1/32"	0.25 mm	ZBRU1.5	5/16"
	0.50 mm	ZBRU1.5L	5/16"
	1/32"	ZBRU1.5T	5/16"
1/8" to 1/32"	0.25 mm	ZBRU2.5	5/16"
	0.50 mm	ZBRU2.5L	5/16"
	1/32"	ZBRU2.5T	5/16"
1/8" to 1/16"	0.25 mm	ZBRU21C	5/16"
	0.75 mm	ZBRU21	5/16"
	1/16"	ZBRU21T	5/16"
1/4" to 1/16"	0.25 mm	ZBRU41C	7/16"
	0.75 mm	ZBRU41	7/16"
	1/16"	ZBRU41T	7/16"
1/4" to 1/8"	0.75 mm	ZBRU42	7/16"
	2.0 mm	ZBRU42L	7/16"
	1/8"	ZBRU42T	7/16"



**Bulkhead internal reducing union – metal (ZBRU21)**

**MORE INFORMATION**

- Internal reducing unions, high pressure PEEK . . . . . pages 57,65
- External/internal reducing unions . . . . . 31
- Internal/external reducing unions . . . . . 31
- Standard unions . . . . . 24-27
- Unions with 1/4-28 fittings . . . . . 72-73

**CONVERSIONS**

- 0.25 mm = .010"
- 0.50 mm = .020"
- 0.75 mm = .030"
- 1.0 mm = .040"
- 1.5 mm = .060"
- 2.0 mm = .080"
- 4.6 mm = .180"
- 6.0 mm = .236"
- 6.4 mm = .253"
- 7.0 mm = .275"
- 10.0 mm = .400"
- 27.0 mm = 1.08"
- 1/32" = 0.8 mm
- 1/16" = 1.6 mm
- 1/8" = 3.2 mm
- 1/4" = 6.4 mm
- 3/8" = 9.5 mm
- 1/2" = 12.7 mm

# Reducing unions


## VALCO FITTINGS

### External reducing unions

These unions connect two sizes of tubing, using external fittings on each end. Standard material is 300 series stainless. Custom bulkhead versions are available in OEM quantities.

#### Standard external reducing unions

Tubing OD	Bore	Prod No
1/8" to 1/16"	0.75 mm	ERU21
	1.00 mm	ERU21L
	1/16"	ERU21T
1/4" to 1/16"	0.75 mm	ERU41
	1/16"	ERU41T
1/4" to 1/8"	0.75 mm	ERU42
	2.0 mm	ERU42L
	1/8"	ERU42T

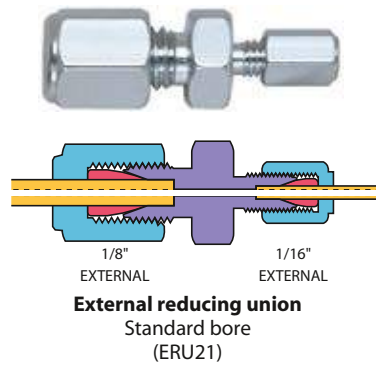

#### Bulkhead external reducing unions

Tubing OD	Bore	Prod No	Bulkhead panel hole diameter
1/8" to 1/16"	1.0 mm	EBRU12L	5/16"
	1/16"	EBRU12T	5/16"
1/4" to 1/16"	1.0 mm	EBRU14L	7/16"
	1/16"	EBRU14T	7/16"
1/4" to 1/8"	2.0 mm	EBRU24L	7/16"



**Bulkhead external reducing union**  
(EBRU12L)

#### TECH TIP

1/16", 1/8", and 1/4" external Valco fitting components are compatible with Parker and Swagelok fittings.


#### TECH TIP

**Note:** Because 1/16" external fittings have very thin, easily distorted walls, they are not as durable as 1/16" internal fittings. We recommend the use of 1/16" internal fittings when possible.

#### CONVERSIONS

0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm
5/16"	= .312" =	7.9 mm
3/8"	= .375" =	9.5 mm
7/16"	= .437" =	11.1 mm



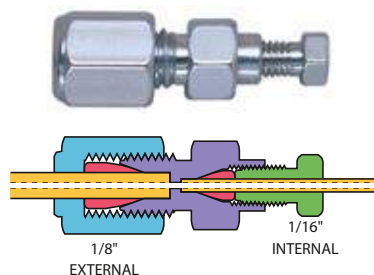

**External/internal reducing union**  
Standard bore  
(EZRU21)




**Bulkhead external/internal reducing union**  
(EZBRU21)

**External/internal reducing unions**

In these reducing unions, the larger size tubing is made up with an external fitting and the smaller size tubing is made up with an internal fitting. In the bulkhead version, the bulkhead nut is on the side with the internal fitting. Other configurations, such as an external nut on the locking nut side, are available on special request.

Standard material is 300 series stainless. Also available in Hastelloy C, gold-plated stainless, and titanium.

<i>Tubing OD</i>	<i>Bore</i>	<b>Standard <i>Prod No</i></b>	<b>Bulkhead <i>Prod No</i></b>	<b>Bulkhead panel hole diameter</b>
1/16" to 1/32"	0.25 mm	EZRU1.5	—	—
	0.50 mm	EZRU1.5L	EZBRU1.5L	5/16"
	1/32"	EZRU1.5T	EZBRU1.5T	5/16"
1/8" to 1/32"	0.25 mm	EZRU2.5	—	—
	0.50 mm	EZRU2.5L	EZBRU2.5L	5/16"
	1/32"	EZRU2.5T	EZBRU2.5T	5/16"
1/8" to 1/16"	0.25 mm	EZRU21C	—	—
	0.75 mm	EZRU21	EZBRU21	5/16"
	1/16"	EZRU21T	EZBRU21T	5/16"
1/4" to 1/16"	0.25 mm	EZRU41C	—	—
	0.75 mm	EZRU41	EZBRU41	7/16"
	1/16"	EZRU41T	EZBRU41T	7/16"
1/4" to 1/8"	1.0 mm	EZRU42	EZBRU42	7/16"
	2.0 mm	EZRU42L	EZBRU42L	7/16"
	1/8"	EZRU42T	EZBRU42T	7/16"

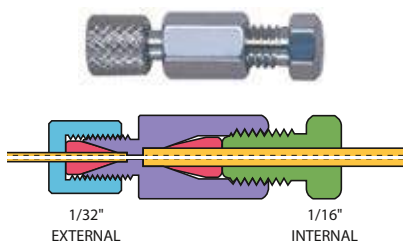

**Internal/external reducing union**  
Standard bore  
(EZRU.51)

**Internal/external reducing unions**

These reducing unions are the opposite of the ones above. The larger size tubing is made up with an internal fitting and the smaller size tubing is made up with an external fitting. In the bulkhead version, the bulkhead nut is on the side with the internal fitting. Standard material is 300 series stainless.

Internal/external reducing unions are typically used to connect 1/16" stainless steel tubing to fused silica tubing.

These unions include a stainless steel ferrule for the 1/16" SS tube, but because of the variety of fused silica ODs and corresponding ferrules, a 1/32" fused silica adapter must be ordered separately. (See page 16.) Only polymeric or soft metal ferrules should be used with 1/32" external details.

<i>Tubing OD</i>	<i>Bore</i>	<b>Standard <i>Prod No</i></b>	<b>Bulkhead <i>Prod No</i></b>	<b>Bulkhead panel hole hole diameter</b>
1/16" to 1/32"	0.25 mm	EZRU.51	EZBRU.51	5/16"
	0.50 mm	EZRU.51L	EZBRU.51L	5/16"
	1/32"	EZRU.51T	EZBRU.51T	5/16"



**Bulkhead internal/external reducing union**  
(EZBRU.51)

**TECH TIP**

1/16", 1/8", and 1/4" external Valco fitting components are compatible with Parker and Swagelok fittings.

**MORE INFORMATION**

- Fused silica adapters... page 16-17
- Polymeric ferrules . . . . . 13
- External unions . . . . . 27
- Internal reducing unions . . . . . 29
- Internal unions . . . . . 26

**VALCO FITTINGS**

**Tees**

Tees connect three lines. Standard material is 300 series stainless. Also available in Hastelloy C, gold-plated stainless, and titanium.

<i>Tubing</i>		
<i>OD</i>	<i>Bore</i>	<i>Prod No</i>
1/32"	0.25 mm	ZT.5
	0.50 mm	ZT.5L
1/16"	0.25 mm	ZT1C
	0.50 mm	ZT1M
	0.75 mm	ZT1
	1.00 mm	ZT1L
1/8"	0.75 mm	ZT2
	2.00 mm	ZT2L
1/4"	1.00 mm	ZT4
	4.60 mm	ZT4L



**Crosses**

Crosses connect four lines. Standard material is 300 series stainless. Also available in Hastelloy C, gold-plated stainless, and titanium.

<i>Tubing</i>		
<i>OD</i>	<i>Bore</i>	<i>Prod No</i>
1/32"	0.25 mm	ZX.5
	0.50 mm	ZX.5L
1/16"	0.25 mm	ZX1C
	0.50 mm	ZX1M
	0.75 mm	ZX1
	1.00 mm	ZX1L
1/8"	0.75 mm	ZX2
	2.00 mm	ZX2L
1/4"	1.00 mm	ZX4
	4.60 mm	ZX4L



**SURFACE MOUNTING TEES AND CROSSES**

1/8" and 1/4" tees and crosses have two threaded mounting holes (8-32). For 1/32" and 1/16", order mounting kit below. Mounting kit includes:  
 Standard bracket SABB  
 Clamp ring CR4  
 Screws and nuts.

Mounting kit . . . DVBRKIT

Some configurations are available with two through holes. Consult factory.

**SPECIAL METALS AND/OR SMALLER BORES**

See microvolume connectors: 1/32" and 1/16" tees, crosses, Y's, and unions in various metals and polymers, with smaller bores.

Microvolume connectors . . . pp 22-23  
 High pressure PEEK connectors . . 62-66  
 Nanovolume connectors . . . . .57-61

**TECH TIP**

To join tubes of different ODs, use the fitting sized for the largest tube along with IZR reducers for the smaller tubes.

IZR reducer . . . . . page 38

**MORE INFORMATION**

PEEK tees . . . pages 57, 64  
 PEEK crosses . . . . .57, 64

### 1/16" Manifolds

1/16" manifolds connect 4 - 16 inlet lines to a single outlet, and are often used to connect the outlets from several columns to a single detector. The unique angled entry of our design reduces dispersion to a minimum. Available with 1.00 mm inlet/outlet bore. Standard materials are PEEK or 300 series stainless.



	<i>Inlet bore</i>	<i>Outlet bore</i>	<i>Material</i>	<i>Prod No</i>
4 inlets	0.25 mm	0.75 mm	Stainless steel	Z4M1
	0.25 mm	0.75 mm	PEEK	Z4M1PK
6 inlets	0.25 mm	0.75 mm	Stainless steel	Z6M1
	0.25 mm	0.75 mm	PEEK	Z6M1PK
8 inlets	0.25 mm	0.75 mm	Stainless steel	Z8M1
	0.25 mm	0.75 mm	PEEK	Z8M1PK
10 inlets	0.25 mm	0.75 mm	Stainless steel	Z10M1
	0.25 mm	0.75 mm	PEEK	Z10M1PK
12 inlets	0.25 mm	0.75 mm	Stainless steel	Z12M1
	0.25 mm	0.75 mm	PEEK	Z12M1PK
14 inlets	0.25 mm	0.75 mm	Stainless steel	Z14M1
	0.25 mm	0.75 mm	PEEK	Z14M1PK
16 inlets	0.25 mm	0.75 mm	PEEK	Z16M1PK

### 1/8" Manifolds

1/8" manifolds connect 4 - 12 inlet lines to a single outlet, and are typically used in a gas distribution system to minimize the number of fitting connections. A manifold pipe fitting version is also available. (See page 34.) Standard material is 300 series stainless steel.

	<i>Inlet bore</i>	<i>Outlet bore</i>	<i>Prod No</i>
4 inlets	2.00 mm	2.00 mm	Z4M2
6 inlets	2.00 mm	2.00 mm	Z6M2
8 inlets	2.00 mm	2.00 mm	Z8M2
10 inlets	2.00 mm	2.00 mm	Z10M2
12 inlets	2.00 mm	2.00 mm	Z12M2



#### SURFACE MOUNTING MANIFOLDS

Mounting kit DVBRKIT

#### TECH TIP

A manifold used with an SD flowpath multi-position valve allows HPLC column selection with a single valve. See page 141 for an illustration.

SD UW valves... page 134

#### CONVERSIONS

- 0.25 mm = .010"
- 0.50 mm = .020"
- 0.75 mm = .030"
- 1.0 mm = .040"
- 1.5 mm = .060"
- 2.0 mm = .080"
- 4.6 mm = .180"
- 6.0 mm = .236"
- 6.4 mm = .253"
- 7.0 mm = .275"
- 10.0 mm = .400"
- 27.0 mm = 1.08"
- 1/32" = 0.8 mm
- 1/16" = 1.6 mm
- 1/8" = 3.2 mm
- 1/4" = 6.4 mm
- 3/8" = 9.5 mm
- 1/2" = 12.7 mm


## VALCO FITTINGS

### Manifold pipe adapters


These manifolds, which go from one or two pipe fittings to three or more Valco zero dead volume fittings, minimize the number of connections between a regulator and the various carrier gas lines in a chromatographic system. The models with two pipe fittings go a step further, allowing the support of a gauge, a second regulator, or a valve leading to a separate system. Additional Valco zero dead volume fittings can be machined on a special order basis. Standard material is 300 series stainless. Also available in Hastelloy C and titanium by special order.




Description	Bore	Prod No
One 1/8" female pipe to:		
three 1/16" ZDV fittings	1.0 mm	FP1Z3M21
three 1/8" ZDV fittings	2.0 mm	FP1Z3M22
three 1/4" ZDV fittings	4.6 mm	FP1Z3M24
One 1/4" female pipe to:		
three 1/16" ZDV fittings	1.0 mm	FP1Z3M41
three 1/8" ZDV fittings	2.0 mm	FP1Z3M42
three 1/4" ZDV fittings	4.6 mm	FP1Z3M44
Two 1/8" female pipe to:		
three 1/16" ZDV fittings	1.0 mm	FP2Z3M21
three 1/8" ZDV fittings	2.0 mm	FP2Z3M22
three 1/4" ZDV fittings	4.6 mm	FP2Z3M24
Two 1/4" female pipe to:		
three 1/16" ZDV fittings	1.0 mm	FP2Z3M41
three 1/8" ZDV fittings	2.0 mm	FP2Z3M42
three 1/4" ZDV fittings	4.6 mm	FP2Z3M44

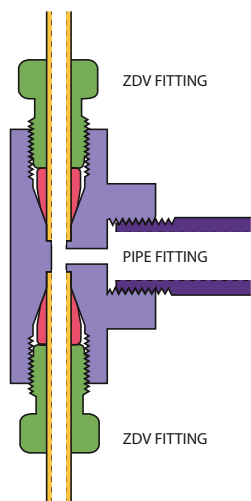

**One pipe fitting**  
to Valco ZDV fittings

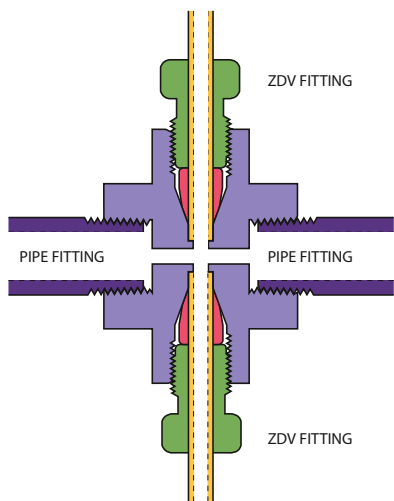

**Two pipe fittings**  
to Valco ZDV fittings

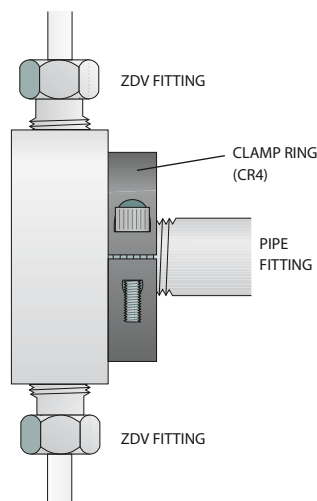

**Adapter with optional**  
**mounting clamp ring**

#### SURFACE MOUNTING MANIFOLDS

Mounting kit DVBRKIT

#### CONVERSIONS

0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm






### Male pipe to Valco internal adapters

Male pipe adapters make a minimum volume connection from the female pipe fittings on pressure gauges and regulators to Valco zero dead volume internal fittings. Standard material is 300 series stainless. Also available in Hastelloy C and titanium.

Description	Bore	Prod No
1/8" NPT male to:		
1/16" ZDV fitting	1.0 mm	PZA21
1/16" ZDV fitting	1/16"	PZA21T
1/8" ZDV fitting	1.0 mm	PZA22
1/4" NPT male to:		
1/16" ZDV fitting	1.0 mm	PZA41
1/8" ZDV fitting	1.0 mm	PZA42
1/8" ZDV fitting	2.0 mm	PZA42L
1/4" ZDV fitting	4.6 mm	PZA44L
1/2" NPT male to:		
1/16" ZDV fitting	1.0 mm	PZA81
1/8" ZDV fitting	1.0 mm	PZA82
1/8" ZDV fitting	2.0 mm	PZA82L
1/4" ZDV fitting	4.6 mm	PZA84L

#### TECH TIP

NPT, National Pipe Thread, is a standard developed a long time ago by people without rulers. 1/8" NPT is nowhere close to 1/8"! Measure the diameter of the fitting across the narrow end. You can also count the number of threads in a 1" section. Then look at the diagrams below to determine the correct size needed.



### Female pipe to Valco internal adapters

Female pipe adapters make a minimum volume connection from the male pipe fittings typically found in gas distribution plumbing to Valco zero dead volume internal fittings. Standard material is 300 series stainless. Also available in Hastelloy C and titanium.

Description	Bore	Prod No
1/8" NPT female to:		
1/16" ZDV fitting	1.0 mm	FPZA21
1/8" ZDV fitting	1.0 mm	FPZA22
1/8" ZDV fitting	2.0 mm	FPZA22L
1/4" NPT female to:		
1/16" ZDV fitting	1.0 mm	FPZA41
1/8" ZDV fitting	1.0 mm	FPZA42
1/8" ZDV fitting	2.0 mm	FPZA42L
1/4" ZDV fitting	4.6 mm	FPZA44L
1/2" NPT female to:		
1/16" ZDV fitting	1.0 mm	FPZA81
1/8" ZDV fitting	1.0 mm	FPZA82
1/8" ZDV fitting	2.0 mm	FPZA82L
1/4" ZDV fitting	4.6 mm	FPZA84L

#### MORE INFORMATION

Pipe to Valco external adapters. . . . . page 36

## VALCO FITTINGS

### Male pipe to Valco external adapters

Male pipe adapters make a minimum volume connection from the female pipe fittings typically found on pressure gauges and regulators to Valco external fittings. Standard material is 300 series stainless.

*Note:* We do not manufacture adapters with 1/16" external fittings because they have very thin, easily distorted walls. We recommend use of the PZAs on the previous page.



Description	Bore	Prod No
1/8" NPT male to:		
1/8" external fitting	2.0 mm	PEA22
1/4" external fitting	4.6 mm	PEA24
1/4" NPT male to:		
1/8" external fitting	2.0 mm	PEA42
1/4" external fitting	4.6 mm	PEA44
1/2" NPT male to:		
1/8" external fitting	2.0 mm	PEA82
1/4" external fitting	4.6 mm	PEA84

### Female pipe to Valco external adapters

Female pipe adapters make a minimum volume connection from the male pipe fittings typically found in gas distribution plumbing to Valco external fittings. Standard material is 300 series stainless.

*Note:* We do not manufacture adapters with 1/16" external fittings because they have very thin, easily distorted walls. We recommend use of the FPZAs on the previous page.

Description	Bore	Prod No
1/8" NPT female to:		
1/8" external fitting	2.0 mm	FPEA22
1/4" external fitting	4.6 mm	FPEA24
1/4" NPT female to:		
1/8" external fitting	2.0 mm	FPEA42
1/4" external fitting	4.6 mm	FPEA44
1/2" NPT female to:		
1/8" external fitting	2.0 mm	FPEA82
1/4" external fitting	4.6 mm	FPEA84



#### TECH TIP

Because of their dead volume and the risk of thread leaks, pipe fittings are a poor choice for trace gas analysis. Thread sealants, particularly PTFE tape, cannot boost their performance to adequate levels. For trace gas applications, choose Valco zero dead volume fittings with gold-plated stainless ferrules. (See page 12.)

#### MORE INFORMATION

Our manifold pipe adapters on page 34 allow you to connect one or two pipe fittings to three Valco zero dead volume fittings.

Pipe to Valco internal adapters. . . . . page 35

#### CONVERSIONS


0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

### Tube adapters

These external adapters are ideal for connecting 1/16" tubing to a detector or injector with a 1/4" fitting. The shorter size is used with 1/4" external fittings while the longer works with 1/4" internal or external fittings. (1/16" nut and ferrule are included; 1/4" nut and ferrule are not.) Standard material is 300 series stainless.



Description	Length	Bore	Prod No
1/4" to 1/16"	0.7"	1/16"	ZTA41
	1.8"	1/16"	ZLTA41
	2.8"	1/16"	ZXLTA41

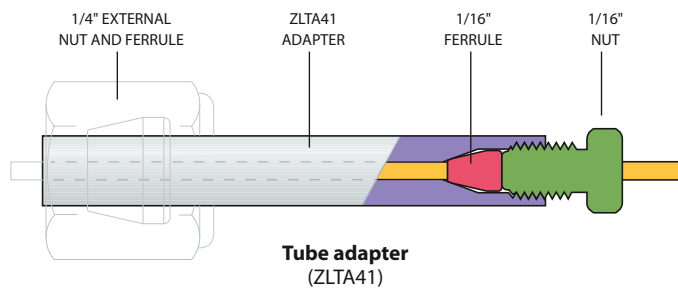


### Aerosol adapter bulkhead union

This unique fitting provides an easy, direct method of connecting the nozzle of a standard aerosol can to a 1/16" Valco zero dead volume fitting.

As with all Valco bulkhead fittings, the flange is undercut to act as a "lock nut" against the instrument wall. Standard material is 300 series stainless.

Description	Prod No
Aerosol adapter bulkhead union	ZBAA1

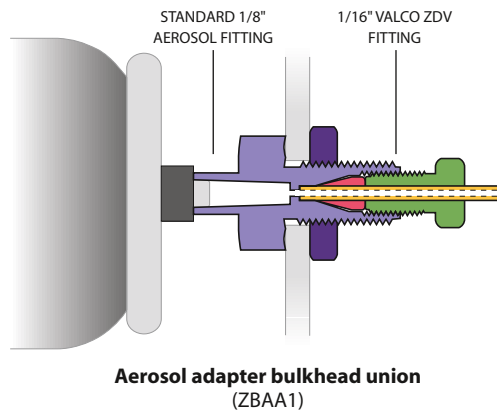

# Internal reducers

## VALCO FITTINGS

### Internal reducers **NEW** *for 360 µm tubing*

Directly connect 360 µm tubing into a 1/16" or 1/32" Valco valve or fitting detail, providing a positive leak-free seal with zero dead volume. These are the same design as our larger internal reducers (*illustration below*). All versions have a stainless steel body, with 360 µm nut/ferrule material as indicated.

Tubing OD	Nut/ferrule material	For use with	Prod No
1/32" to 360 µm	Stainless/stainless	Metal tubing	C360IZR.5TS6
	PEEK/ GF* PEEK	PEEK tubing	C360IZR.5TS6PK
	SS/gold-plated nickel	Fused silica	C360IZR.5TS6FS
1/16" to 360 µm	Stainless/stainless	Metal tubing	C360IZR1S6
	PEEK/GF* PEEK	PEEK tubing	C360IZR1S6PK
	SS/aluminum	Fused silica	C360IZR1S6AL
	SS/gold-plated nickel	Fused silica	C360IZR1S6FS





\* glass-filled

### Internal reducers

Valco's internal reducer (IZR) allows smaller tubing to be used in valves with fitting details for larger tubing, forming a positive leak-free seal with zero dead volume. The small line from your system goes directly into the IZR and the sample goes directly into the valve, without the short pieces of connecting tubing required if a reducing union was used instead. (A reducing ferrule would also work, but makes a seal of less integrity.) Once the fitting is installed, only one wrench is required to remove and reinstall it.

A second version has a 2 micron stainless steel frit pressed into the end of the liner, adding filtering capability. However, we suggest using these only as a final or backup filter, with a standard filter (*see pages 48-52*) as the primary filter. Because IZR's have a much smaller surface area than the standard filter, they tend to plug too often if used in a stand-alone capacity.

Tubing OD	Bore	Without frit		With 2µ frit	
		Prod No	Prod No	Prod No	Prod No
1/16" to 1/32"	0.25 mm	IZR1.5	IZR1.5F		
	0.50 mm	IZR1.5L	IZR1.5LF		
	1/32"	IZR1.5T	—		
1/8" to 1/16"	0.25 mm	IZR21C	IZR21CF		
	0.50 mm	IZR21	IZR21F		
	1.00 mm	IZR21L	IZR21LF		
	1/16"	IZR21T	—		
1/4" to 1/16"	1.00 mm	IZR41	IZR41F		
1/4" to 1/8"	1.00 mm	IZR42	IZR42F		
1/4" to 1/8"	2.00 mm	IZR42L	IZR42LF		

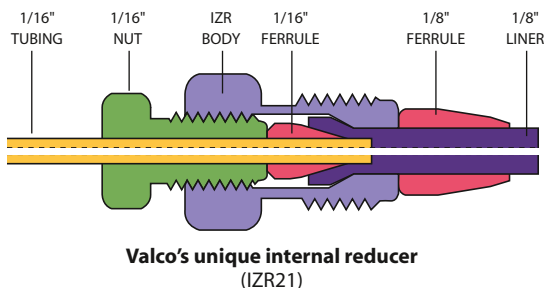

### 360 MICRON FITTINGS

See our extensive line of 360 µm fittings . . . pp 57-58

### CONVERSIONS

0.25 mm = .010"
0.50 mm = .020"
0.75 mm = .030"
1.0 mm = .040"
1.5 mm = .060"
2.0 mm = .080"
4.6 mm = .180"
6.0 mm = .236"
6.4 mm = .253"
7.0 mm = .275"
10.0 mm = .400"
27.0 mm = 1.08"
1/32" = 0.8 mm
1/16" = 1.6 mm
1/8" = 3.2 mm
1/4" = 6.4 mm
3/8" = 9.5 mm
1/2" = 12.7 mm



**External to internal reducer** *NEW* for 360 µm tubing



Directly connect 360 µm tubing into a 1/32" Valco external union or the external type fittings common on injectors and detectors with a Valco zero dead volume connection.

Tubing OD	Nut/ferrule material	Bore	For use with	Prod No
1/32" to 360 µm	Stainless	150 µm	Metal tubing	C360EZR.5XC

**External to internal adapters (injector/detector adapters)**




EZAs (external adapters) and EZRs (external reducers) adapt an external tee or union or the external type fittings common on injectors and detectors to Valco zero dead volume connections. Since EZAs are commonly used to connect an external fitting to an existing tube already made up with a Valco internal fitting, a nut and ferrule are not included.

Only one wrench is required to change tubes after the fitting is made up. While an external to internal union or reducing union plus a length of tubing can accomplish the same thing, these adapters do the trick with a single fitting.

Standard material is 300 series stainless. The EZA does not include a nut or ferrule. The EZR includes a liner, one nut, and two ferrules.

Description	Bore	Prod No
<b>External to internal adapters</b>		
1/16" ext. to 1/16" int.	—	EZA1
1/8" ext. to 1/8" int.	—	EZA2
<b>External reducers</b>		
1/16" ext. to 1/32" int.	0.25 mm	EZR1.5
	1/32"	EZR1.5T
1/8" ext. to 1/32" int.	0.25 mm	EZR2.5
1/8" ext. to 1/16" int.	0.50 mm	EZR21
	1/16"	EZR21T
1/4" ext. to 1/16" int.	1.00 mm	EZR41
	1/16"	EZR41T
1/4" ext. to 1/8" int.	1.00 mm	EZR42
	1/8"	EZR42T

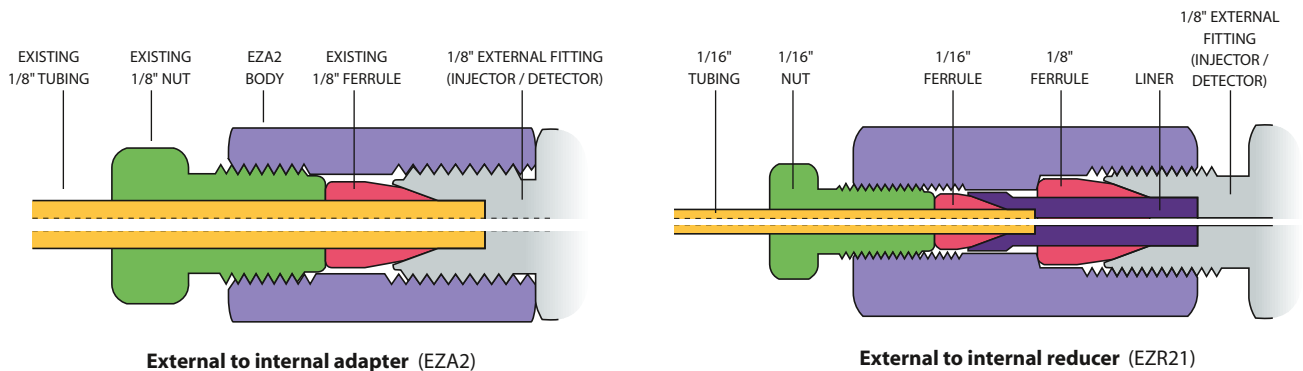

**VALCO FITTINGS**

**Zero dead volume fill ports**

The ZVISF-1 is a unique fill port fitting designed so that a leaktight seal is formed against the face of the bottom of the fitting detail instead of at the end of an angular ferrule, resulting in a true zero dead volume connection with no carry over or sample loss. The polymer bushing snaps into the knurled PEEK nut, providing the convenience of a one-piece fitting. An ultrathin metal sleeve surrounds and supports the portion of the bushing which extends into the pilot of the fitting detail, preventing the bushing from mushrooming and getting stuck in the pilot as the fitting is tightened.

For use with 22 gauge blunt tip needle.

*Description*

*Prod No*

**For high pressure 1/16" ZDV Cheminert injectors with polymeric stators (C2, C3, C4, and C52 series)**

Most applications	PFA bushing	ZVISF-1PFAH
High throughput applications	High density polyethylene bushing	ZVISF-1PEH

**For low pressure 1/16" ZDV Cheminert injectors, fittings, and most Valco injectors**

Most applications	PFA bushing	ZVISF-1PFA
High throughput applications	High density polyethylene bushing	ZVISF-1PE



**Fill ports**

*for 1/16" polymeric Cheminert valves*

These fill ports provide direct syringe connections to polymeric valves and fittings. Since the fitting detail in the high pressure Cheminert valve is unique, be sure to order the high pressure version for polymeric HPLC injectors. For use with 22 gauge blunt tip needle.

*Description*

*Prod No*

**For high pressure injectors (C2, C3, C4, and C52 series injectors)**

C-VISF-1H



**For fittings and low pressure injectors (C22Z and C62Z series injectors)**

C-VISF-1



**Replacement liners and ferrules**

Liner for C-VISF-1	VISL-1
Liner for C-VISF-1H	VISL-1H
Ferrule for C-VISF-1 (or 1H)	ZF1VISF

**Fill ports**

*for Valco and metal Cheminert valves*

Fill ports provide direct syringe connections to valves and fittings, with the polymeric ferrule compressing a liner to seal around the needle. These fill ports are for use with metal valves.

*Description*

*Prod No*

**For use with blunt tip needle**

For 1/32" fittings and injectors - 26 ga VISF.5FPK



For 1/16" fittings and injectors - 22 ga VISF-1



**For use with 2" 22 gauge blunt tip needle**

For 1/16" fittings and injectors VISF-2  
For 1/8" fittings and injectors VISF-A



**Replacement liners and ferrules**

Liner for VISF-1	VISL-1
Liner for VISF-2 or VISF-A	VISL-2
Ferrule for VISF-1 or VISF-2	ZF1VISF





for Cheminert C2  
and C4 valves

**Loop fill port assembly**

The loop fill port assembly, for use with Cheminert high pressure valves (C2 and C4 series), permits sample loading and manual injection from the front of the valve. It includes an aluminum bracket, two syringe fill ports (for 3/4" or 2" needles), a bulkhead union, and two pieces of stainless tubing: one piece is 0.013" ID with a volume of 7 µl, and the other is 0.50 mm ID and 17 µl.

Description	Prod No
Loop fill port assembly	C-LFP



**Female luer adapters**


Female luer adapters provide direct syringe connections to zero dead volume fittings and valves.

Description	Prod No
Female luer to: 1/32" fitting	ZLA-.5
1/16" fitting	ZLA-1
1/8" fitting	ZLA-2

**Septum injector nuts**

Septum injector nuts are a simple way to provide syringe access to any point of a gas or liquid system. The injector nut includes a Valcon T polyimide septum support which accepts a standard 1/4" GC septum. The nut's 1/8" external fitting detail can connect directly to common external type fittings, or can be adapted to Valco internal fittings using an external/internal union or reducing union.

Description	Prod No
Septum injector nut with support	EN2SI
Replacement support	ZF2SI
Septum, low bleed, pkg. of 10	SI4G

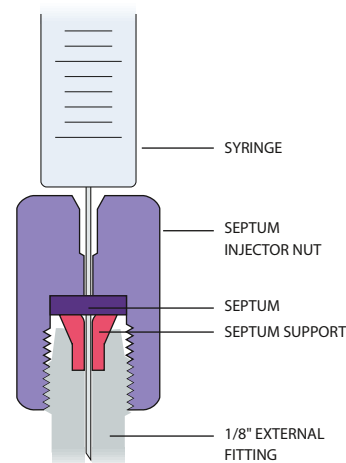

**Septum injector nut**  
with septum and support (EN2SI)

**MORE INFORMATION**

External/internal reducing unions . . . pg 31  
External/internal unions . . . . . 27

**Cheminert valves**

Model C2 . . . . . 160, 163  
Model C4 . . . . . 161, 164

**CONVERSIONS**

- 0.25 mm = .010"
- 0.50 mm = .020"
- 0.75 mm = .030"
- 1.0 mm = .040"
- 1.5 mm = .060"
- 2.0 mm = .080"
- 4.6 mm = .180"
- 6.0 mm = .236"
- 6.4 mm = .253"
- 7.0 mm = .275"
- 10.0 mm = .400"
- 27.0 mm = 1.08"
- 1/32" = 0.8 mm
- 1/16" = 1.6 mm
- 1/8" = 3.2 mm
- 1/4" = 6.4 mm
- 3/8" = 9.5 mm
- 1/2" = 12.7 mm

# HPLC column end fittings

## VALCO FITTINGS


Although our column end fittings look like ordinary reducing unions, they are machined with a conical recess to match a specific column ID so that there are no abrupt or irregular diameter changes which can cause loss of theoretical plates. (See illustrations, below.) This optimization results in an assortment of column end fittings for each column OD. To receive full benefit of this design, use column end fittings only with the specific column ID for which they are intended. We can design special fittings for unusual sizes or OEM use.

If a temporary frit is used during column packing, the frit OD should match the column OD. Permanent frits should have an OD matched to the column ID, and should be pressed in to give the lowest dead volume. Our frits are available in a variety of

pore sizes, and we offer titanium and Hastelloy C frits for systems sensitive to exposed stainless steel.

All column end fittings are rated to 10,000 psi. However, the functional limit is dictated by the yield strength of the tubing used with the fitting. Standard 1/4", 3/8", and 1/2" columns are usually packed at 8,000 - 10,000 psi, which is right at the yield strength for the tubing commonly used. Columns with 1" ID have a yield strength of 6,000 - 8,000 psi, and the fitting will not hold if the system pressure exceeds that limit.

The newest addition to the line is the Nanovolume® column end fitting. (See page 61.) These all-PEEK fittings feature fingertight zero dead volume connections with 100 or 150 micron bore. PEEK sleeves permit use with any fused silica tubing.

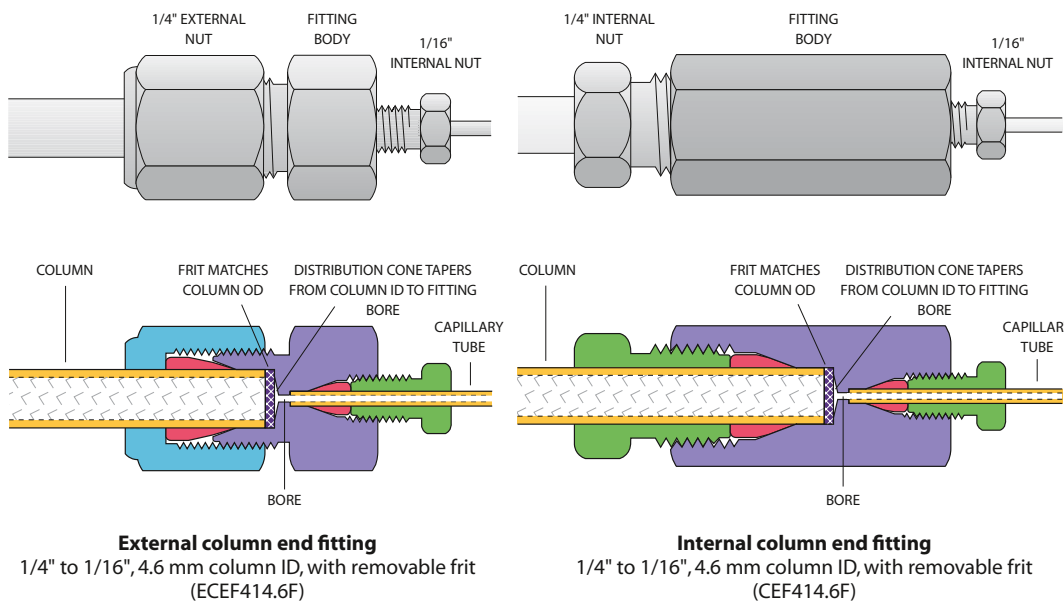

**TECH TIP**  
Standard column end fittings are Type 316 stainless, but since the column wall and frit form over 99% of the column surface area, standard fittings with titanium frits can generally be used on inert columns.

**TECH TIP**  
When packing columns, use Valco "through-type" unions to couple the column to the packing reservoir.

Size	Prod No
1/16" union	ZU1T
1/8" union	ZU2T
1/4" union	ZU4T

Through-type unions for packing columns..... page 26


**MORE INFORMATION**  
Frits..... page 45

**Microbore column end fittings**


(1.0 mm – 2.0 mm column ID)

Standard material is Type 316 stainless.

	Bore	Column ID	Without frit Prod No	Removable 2µ frit Prod No
<b>External column end fittings</b>				
	1/16" to 1/16"	0.25 mm	ECEF111.0	ECEF111.0F
	1/8" to 1/16"	0.25 mm	ECEF211.0	ECEF211.0F

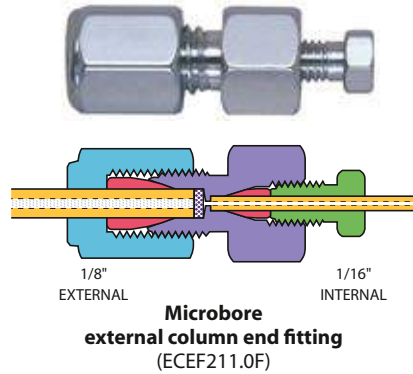

	Bore	Column ID	Without frit Prod No	Removable 2µ frit Prod No
<b>Internal column end fittings</b>				
	1/16" to 1/32"	0.25 mm	CEF1.5	CEF1.5F
	1/16" to 1/16"	0.25 mm	CEF1	CEF1F
	1/8" to 1/32"	0.25 mm	CEF2.51.0	CEF2.51.0F
	1/8" to 1/16"	0.25 mm	CEF211.0	CEF211.0F
	1/8" to 1/16"	0.25 mm	CEF212.0	CEF212.0F

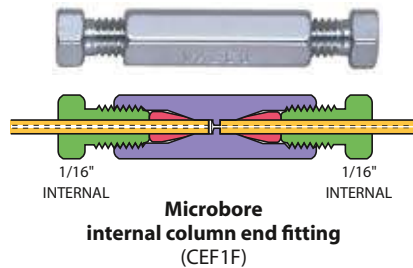

**NANOBORE COLUMN  
END FITTINGS**

See our complete line of 100 µm and 150 µm bore fittings on page 61.

**CONVERSIONS**


- 100 µm = .004"
- 150 µm = .006"
- 0.25 mm = .010"
- 0.50 mm = .020"
- 0.75 mm = .030"
- 1.0 mm = .040"
- 1.5 mm = .060"
- 2.0 mm = .080"
- 4.6 mm = .180"
- 6.0 mm = .236"
- 6.4 mm = .253"
- 7.0 mm = .275"
- 10.0 mm = .400"
- 27.0 mm = 1.08"
- 1/32" = 0.8 mm
- 1/16" = 1.6 mm
- 1/8" = 3.2 mm
- 1/4" = 6.4 mm
- 3/8" = 9.5 mm
- 1/2" = 12.7 mm

## VALCO FITTINGS

### Analytical column end fittings *(2.0 mm – 4.6 mm column ID)*


Standard material is Type 316 stainless.

	Bore	Column ID	Without frit Prod No	Removable 2µ frit Prod No
<b>External column end fittings</b>				
1/4" to 1/16"	0.4 mm	2.1 mm	ECEF412.1	ECEF412.1F
1/4" to 1/16"	0.4 mm	3.0 mm	ECEF413.0	ECEF413.0F
1/4" to 1/16"	0.4 mm	4.0 mm	ECEF414.0	ECEF414.0F
1/4" to 1/16"	0.4 mm	4.6 mm	ECEF414.6	ECEF414.6F

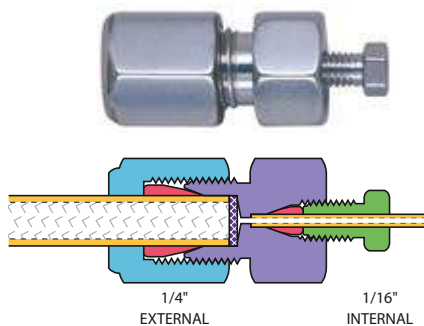

**Analytical external column end fitting with removable frit (ECEF414.6F)**

	Bore	Column ID	Without frit Prod No	Removable 2µ frit Prod No
<b>Internal column end fittings</b>				
1/4" to 1/16"	0.4 mm	2.1 mm	CEF412.1	CEF412.1F
1/4" to 1/16"	0.4 mm	3.0 mm	CEF413.0	CEF413.0F
1/4" to 1/16"	0.4 mm	4.0 mm	CEF414.0	CEF414.0F
1/4" to 1/16"	0.4 mm	4.6 mm	CEF414.6	CEF414.6F

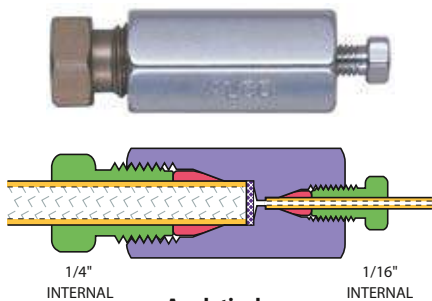

**Analytical internal column end fitting with removable frit (CEF414.6F)**

### NANOBORE COLUMN END FITTINGS

See our complete line of 100 µm and 150 µm bore fittings on page 61.


#### CONVERSIONS

100 µm	=	.004"
150 µm	=	.006"
0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

## Semi-preparative and preparative column end fittings

Standard material is Type 316 stainless.

	Bore	Column ID	Without frit Prod No	Removable 2 $\mu$ frit Prod No
<b>External column end fittings</b>				
3/8" to 1/16"	0.40 mm	6.0 mm	ECEF616.0	ECEF616.0F
3/8" to 1/16"	0.40 mm	7.0 mm	ECEF617.0	ECEF617.0F
1/2" to 1/16"	0.75 mm	9.0 mm	ECEF819.0	ECEF819.0F
1/2" to 1/16"	0.75 mm	10.0 mm	ECEF8110.0	ECEF8110.0F
1" to 1/16"	0.75 mm	20.0 mm	ECEF1K1	ECEF1K1F

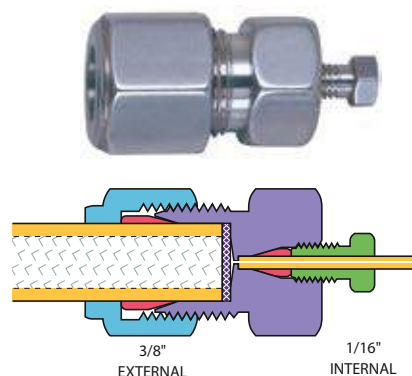

**Semi-preparative  
external column end fitting  
(ECEF616.0F)**



## Replacement frits

1/16", 1/8" and 1/4" frits are sold in packages of 10. 3/8", 1/2", and 1" frits are sold individually. Other sizes may be available or special-ordered in OEM quantities.

	Pore Size	Frit thickness	Stainless steel Prod No	Hastelloy C Prod No	Titanium Prod No
<i>Package of 10:</i>					
1/16" frits	0.5 $\mu$	0.75 mm	.5FR1-10	.5FR1HC-10	—
	2 $\mu$	0.75 mm	2FR1-10	2FR1HC-10	2FR1TI-10
	10 $\mu$	0.75 mm	10FR1-10	—	—
1/8" frits	0.5 $\mu$	1.00 mm	.5FR2-10	—	—
	2 $\mu$	1.00 mm	2FR2-10	2FR2HC-10	2FR2TI-10
	10 $\mu$	1.00 mm	10FR2-10	—	—
1/4" frits	0.5 $\mu$	1.00 mm	.5FR4-10	—	—
	2 $\mu$	1.00 mm	2FR4-10	2FR4HC-10	2FR4TI-10
	10 $\mu$	1.00 mm	10FR4-10	10FR4HC-10	—
<i>Each:</i>	3/8" frits	2 $\mu$	2FR6	2FR6HC	2FR6TI
	1/2" frits	2 $\mu$	2FR8	2FR8HC	2FR8TI
	1" frits	2 $\mu$	2FR1K	2FR1KHC	2FR1KTI

# Post-column reaction tee fittings


## VALCO FITTINGS

### Post-column reaction tee fitting

The tee column end fitting (TCEF) has a third connection perpendicular to the normal flowpath. The TCEF permits post-column derivation, or may be used as a curtain flow column inlet fitting. Standard material is Type 316 stainless.



Column OD	Cone OD	Inlet/outlet OD	Bore	Side OD	Bore	Prod No
1/16"	1.0 mm	1/32"	0.25 mm	1/32"	0.25 mm	TCEF1.5.5C
1/16"	1.0 mm	1/32"	0.90 mm	1/32"	0.25 mm	TCEF1.5.5T
1/16"	1.0 mm	1/16"	0.25 mm	1/16"	0.25 mm	TCEF111
1/8"	1.0 mm	1/16"	0.75 mm	1/16"	0.75 mm	TCEF211
1/8"	1.0 mm	1/16"	1.65 mm	1/16"	0.40 mm	TCEF211T
1/4"	4.6 mm	1/16"	0.25 mm	1/16"	0.25 mm	TCEF411C
1/4"	4.6 mm	1/16"	0.75 mm	1/16"	0.75 mm	TCEF411
1/4"	4.6 mm	1/16"	1.65 mm	1/16"	0.75 mm	TCEF411T
1/4"	4.6 mm	1/8"	0.75 mm	1/16"	0.75 mm	TCEF421
3/8"	6.0 mm	1/16"	0.75 mm	1/16"	0.75 mm	TCEF611
3/8"	6.0 mm	1/16"	1.65 mm	1/16"	0.75 mm	TCEF611T
1/2"	9.0 mm	1/16"	0.75 mm	1/16"	0.75 mm	TCEF811
1/2"	9.0 mm	1/16"	1.65 mm	1/16"	0.75 mm	TCEF811T

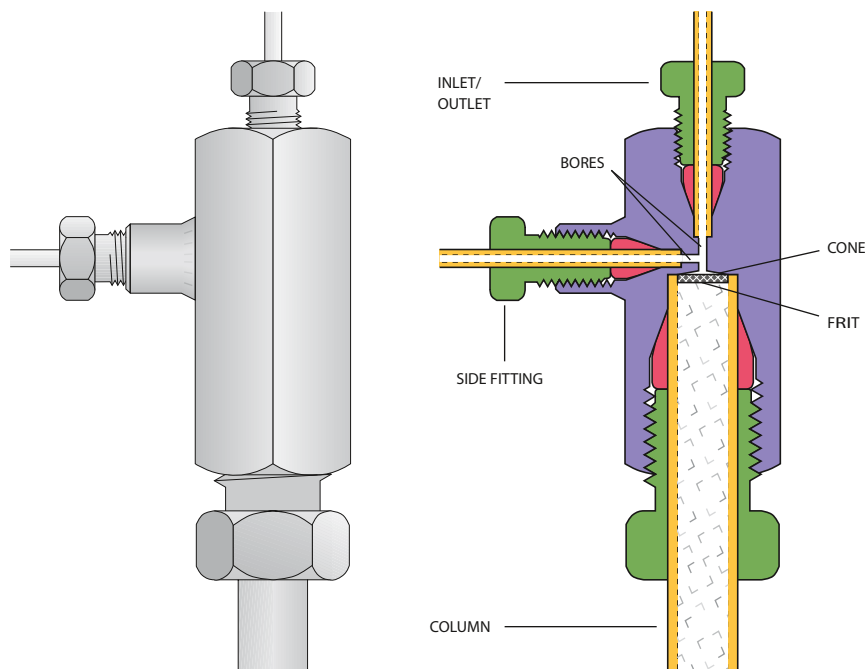

Post-column reaction fitting (TCEF411)

#### TECH TIP

Tee column end fittings (TCEFs) for 1/16" OD tubing/columns have a round profile. For other sizes, they are made of hexagonal bar stock.

#### CONVERSIONS

- 0.25 mm = .010"
- 0.50 mm = .020"
- 0.75 mm = .030"
- 1.0 mm = .040"
- 1.5 mm = .060"
- 2.0 mm = .080"
- 4.6 mm = .180"
- 6.0 mm = .236"
- 6.4 mm = .253"
- 7.0 mm = .275"
- 10.0 mm = .400"
- 27.0 mm = 1.08"
- 1/32" = 0.8 mm
- 1/16" = 1.6 mm
- 1/8" = 3.2 mm
- 1/4" = 6.4 mm
- 3/8" = 9.5 mm
- 1/2" = 12.7 mm






### Precolumns (guard columns)

Precolumns are available in 2 cm and 5 cm lengths, and can be filled with either 5 $\mu$  packing or 37 - 44 $\mu$  pellicular packing. Both lengths are used in conjunction with a column end fitting. When packed for high efficiency they can be used as analytical columns, but a more typical use is as a guard column installed between the injector and the analytical column. Standard material is Type 316 stainless.

<i>Description</i>	<i>Prod No</i>
1/4" x 2 cm precolumn system	PCS412F
Includes:	
One precolumn insert	
One internal column end fitting	
One 2 $\mu$ frit	
1/4" x 5 cm precolumn system	PCS415F
Includes:	
One precolumn insert	
One external column end fitting	
One 2 $\mu$ frit	
Precolumns (for use with existing column end fittings)	
1/4" x 2 cm precolumn insert	PCL412
1/4" x 5 cm precolumn insert	PCL415

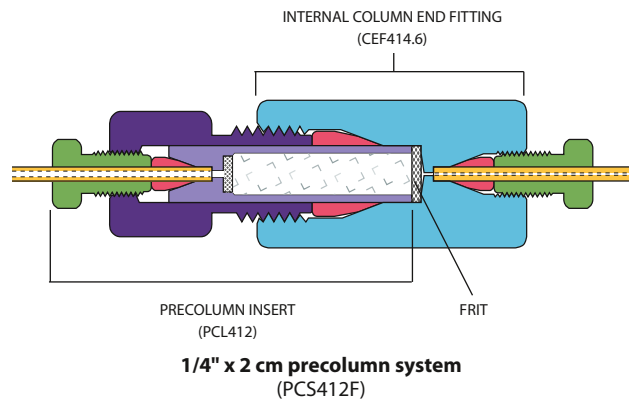

### Fingertight HPLC cartridge precolumns

This cartridge-based system is designed for use as a precolumn or concentrator column in HPLC and FIA applications. It is particularly suited to applications requiring frequent changes; snap-on seals are replaceable, the cartridge is reusable, and the tubing connections are stable since the end fittings do not rotate as the assembly is tightened. Standard material is Type 316 stainless, with PEEK seals and 2 $\mu$  titanium frits.

<i>Description</i>	<i>Prod No</i>
0.25 ml (4.0 mm ID x 2 cm)	
Fingertight cartridge assembly	SFECH412
Replaceable cartridge	SFEC42

**NOTE**

As a courtesy to our OEM customers, VICI does not supply pre-packed columns.

## VALCO FITTINGS


There are many flow elements of analytical instruments which require protection from foreign particles, such as orifices that may become plugged or surfaces that may get scratched. However, conventional filtering devices may have too large a volume to be consistent with good system performance – particularly in chromatographic applications.

Valco's unique filter design results in extremely low internal volume and simplifies filter element replacement. Filter bodies are "coned" for uniform flow and maximum filter surface area. The filters are made entirely of metal, so they can be used at any instrumentation temperature. While the standard metal is 316 series stainless, filters can be made from alloys that can be used in virtually any application.

We offer a choice of three different filtering elements. All styles are available in bulkhead configurations for mounting on a panel or instrument wall. (Please note that since frits and screens have

significantly different thicknesses, they cannot be used interchangeably in the same filter body.)

- **Pressed frits**, permanently installed in the filter, are recommended where contaminants are the exception and not the rule. The frits are 2 $\mu$  stainless.
- **Removable frits** are the best choice for maximum filtration, or if the application requires Hastelloy C or titanium. However, they allow more mixing and tend to clog more than screens. A 2 $\mu$  frit is included with the filter, but 0.5, 2, and 10 $\mu$  replacement frits are available in three materials.
- **Removable screens** plug less rapidly and provide lower pressure drop than frits. Since they are thinner, there is less mixing and dispersal than might occur with a frit, but frits provide better filtration. A 2 $\mu$  screen is included with the filter, and 2 and 10 $\mu$  stainless replacement screens may be ordered.

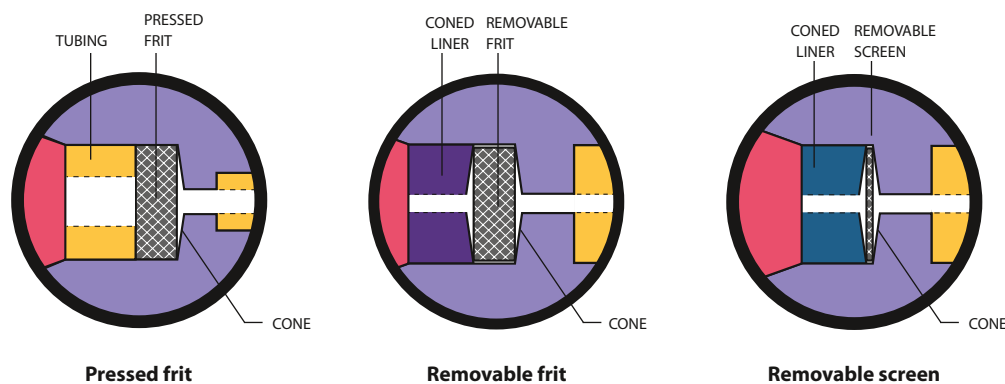

**MORE INFORMATION**

Biocompatible filter . . . p 78


In-line filters for  
1/4-28 fittings . . . . . 78

Mobile phase  
filters . . . . . 79-80

Filters with removable frits are designed to compensate for the thickness of the filter element – the resulting pilot depths are identical with the rest of the Valco product line, facilitating interchangeability of *made up* fittings. Therefore, although our filters look very much like our unions, they are not interchangeable with unions; a filter with its frit removed should not be substituted for a union, because the space

designed for the frit introduces dead volume into the system. In addition, since filter bodies are coned, they will have dead volume when used as a union even if the tubing is made up in the filter with a longer, non-standard pilot length.


An arrow imprinted on all filter bodies serves to differentiate them from unions and to indicate recommended flow direction.

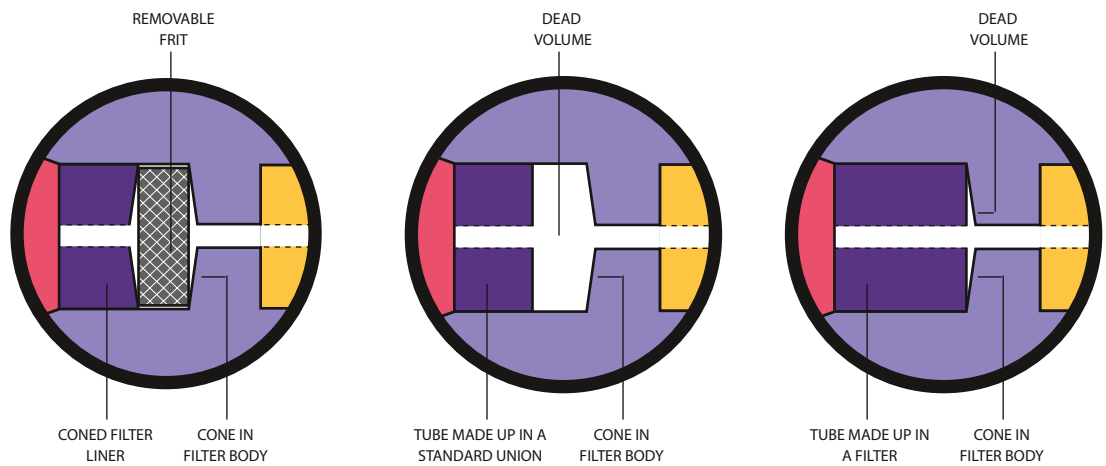

**Filter with removable frit**  
Coned for uniform flow and maximum filter surface

**Filter with frit removed being used as a reducing union**  
Dead volume is created where frit should be

**Filter with frit removed being used as a reducing union**  
Cone in filter body creates dead volume

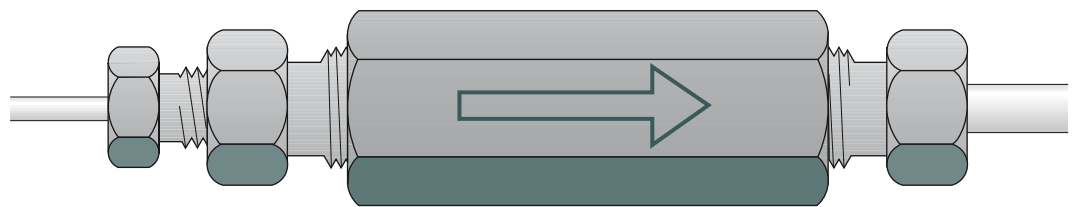

**Arrow imprinted on filter body showing recommended direction of flow**



**VALCO FITTINGS**

**Filters with a pressed frit**

Pressed frit filters contain a permanently installed stainless steel 2 $\mu$  frit, and are recommended for applications where contaminants are the exception and not the rule – that is, when the sample is generally clean but you wish to guard against the stray burr from a carelessly prepared tube end that might find its way into the flowpath. Standard material is Type 316 stainless.



Description	Bore	Standard		Bulkhead	
		Prod No	Prod No	Prod No	Prod No
1/16" to 1/32"	0.25 mm	ZRUF1.5	ZBRUF1.5	ZUF1	ZBUF1
1/16" to 1/16"	0.75 mm	ZRUF21	ZBRUF21	ZUF2	ZBUF2
1/8" to 1/16"	0.75 mm	ZRUF42	ZBRUF42	ZUF4	ZBUF4
1/4" to 1/8"	2.00 mm				
1/4" to 1/4"	4.60 mm				

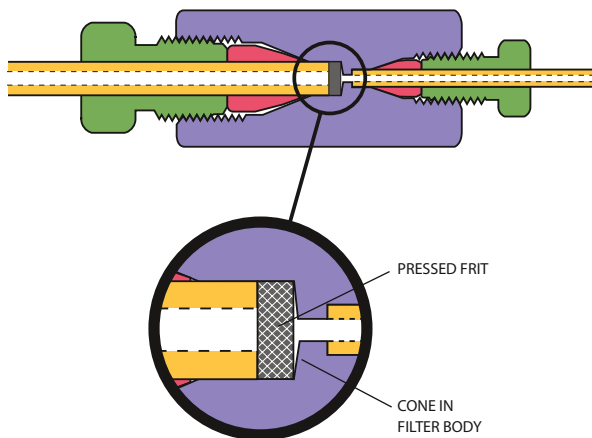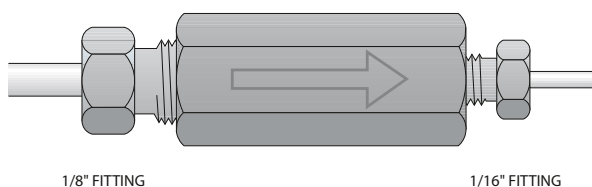

**Reducing filter with a pressed frit**  
1/8" to 1/16"  
(ZRUF21)

**CONVERSIONS**



- 0.25 mm = .010"
- 0.50 mm = .020"
- 0.75 mm = .030"
- 1.0 mm = .040"
- 1.5 mm = .060"
- 2.0 mm = .080"
- 4.6 mm = .180"
- 6.0 mm = .236"
- 6.4 mm = .253"
- 7.0 mm = .275"
- 10.0 mm = .400"
- 27.0 mm = 1.08"
- 1/32" = 0.8 mm
- 1/16" = 1.6 mm
- 1/8" = 3.2 mm
- 1/4" = 6.4 mm
- 3/8" = 9.5 mm
- 1/2" = 12.7 mm

**Filters with a removable frit**

These filters come with a removable 2µ frit. The standard frit can be replaced with any frit of the proper diameter, *but not by a screen*. These filters are suitable for streams with frequent contamination, since the filtering element is easily changed. Standard material is Type 316 series stainless.



Description	Bore	Standard	Bulkhead
		Prod No	Prod No
1/32" to 1/32"	0.25 mm	ZUFR.5F	ZBUFR.5F
1/16" to 1/32"	0.25 mm	ZRUFR1.5F	ZBRUFR1.5F
1/16" to 1/16"	0.25 mm	ZUFR1CF	ZBUFR1CF
	0.50 mm	ZUFR1F	ZBUFR1F
1/8" to 1/16"	0.75 mm	ZRUFR21F	ZBRUFR21F
1/8" to 1/8"	2.00 mm	ZUFR2F	ZBUFR2F
1/4" to 1/16"	1.00 mm	ZRUFR41F	ZBRUFR41F
1/4" to 1/8"	2.00 mm	ZRUFR42F	ZBRUFR42F

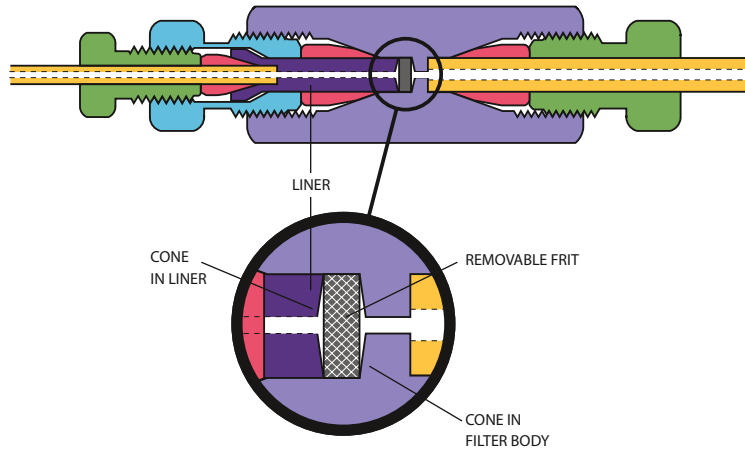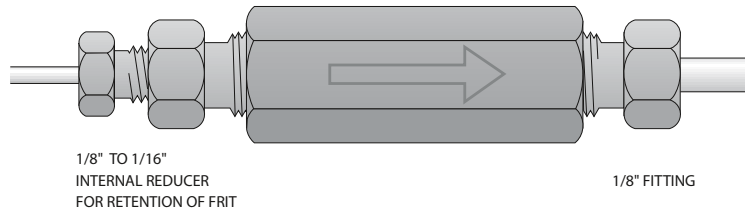

**Reducing filter with a removable frit**  
1/8" to 1/16"  
(ZRUFR21F)

**TECH TIP**  
**Should you use a filter with a frit or one with a screen?**

Screens have much higher flow capacity (Cv), but frits are the best choice for maximum filtration or if your application requires Hastelloy C or titanium. However, since they are thicker than screens, frits allow more mixing, and the downside of their superior filtration is that they clog more often than screens.

Note! The difference in thickness also means that frits and screens cannot be used interchangeably in the same fitting body:

**A frit must always be replaced with a frit.**

**A screen must always be replaced with a screen.**

Replacement frits ..... page 53

**Filters with a removable screen**

These filters come with a removable 2µ screen. The standard screen can be replaced with any screen of the proper diameter, *but not by a frit*. These filters are suitable for streams with frequent contamination, since the filtering element is easily changed. Standard material is Type 316 series stainless.

Description	Bore	Standard	Bulkhead
		Prod No	Prod No
1/32" to 1/32"	0.25 mm	ZUFR.5	ZBUFR.5
1/16" to 1/32"	0.25 mm	ZRUFR1.5	ZBRUFR1.5
1/16" to 1/16"	0.25 mm	ZUFR1C	ZBUFR1C
	0.50 mm	ZUFR1	ZBUFR1
1/8" to 1/16"	0.75 mm	ZRUFR21	ZBRUFR21
1/8" to 1/8"	2.00 mm	ZUFR2	ZBUFR2
1/4" to 1/16"	1.00 mm	ZRUFR41	ZBRUFR41
1/4" to 1/8"	2.00 mm	ZRUFR42	ZBRUFR42



**TECH TIP**  
Should you use a filter with a frit or one with a screen?

Screens have much higher flow capacity (Cv), but frits are the best choice for maximum filtration or if your application requires Hastelloy C or titanium. However, since they are thicker than screens, frits allow more mixing, and the downside of their superior filtration is that they clog more often than screens.

Note! The difference in thickness also means that frits and screens cannot be used interchangeably in the same fitting body:

**A frit must always be replaced with a frit.**


**A screen must always be replaced with a screen.**

Replacement screens..... page 53

**CONVERSIONS**



- 0.25 mm = .010"
- 0.50 mm = .020"
- 0.75 mm = .030"
- 1.0 mm = .040"
- 1.5 mm = .060"
- 2.0 mm = .080"
- 4.6 mm = .180"
- 6.0 mm = .236"
- 6.4 mm = .253"
- 7.0 mm = .275"
- 10.0 mm = .400"
- 27.0 mm = 1.08"
- 1/32" = 0.8 mm
- 1/16" = 1.6 mm
- 1/8" = 3.2 mm
- 1/4" = 6.4 mm
- 3/8" = 9.5 mm
- 1/2" = 12.7 mm

- 5/16" = .312" = 7.9 mm
- 3/8" = .375" = 9.5 mm
- 7/16" = .437" = 11.1 mm

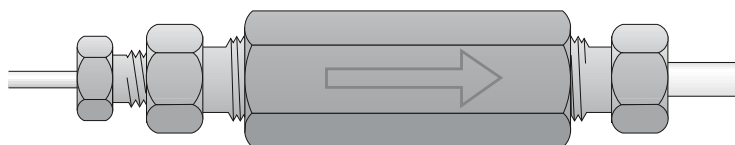

1/8" TO 1/16"  
INTERNAL REDUCER  
TO HOLD SCREEN IN POSITION

1/8" FITTING

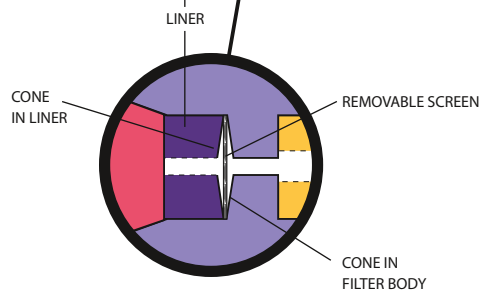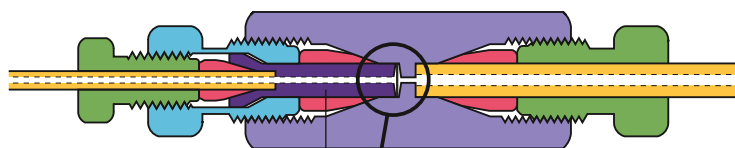

**Reducing filter with a removable screen**

1/8" to 1/16"  
(ZRUFR21)

**Replacement frits**

Other sizes may be available or special ordered in OEM quantities.

Note: If a filter was ordered with a removable frit, the frit **cannot** be replaced with a screen.



		Pore Size	Frit Thickness	Stainless Steel Prod No	Hastelloy C Prod No	Titanium Prod No
Pkg of 5:	1/32" frits	0.2μ	0.25 mm	.2FR.5-5	—	—
		0.5μ	0.25 mm	.5FR.5-5	—	—
		2μ	0.25 mm	2FR.5-5	—	—
Pkg of 10:	1/16" frits	0.5μ	0.75 mm	.5FR1-10	.5FR1HC-10	—
		2μ	0.75 mm	2FR1-10	2FR1HC-10	2FR1TI-10
		10μ	0.75 mm	10FR1-10	—	—
Pkg of 10:	1/8" frits	0.5μ	1.00 mm	.5FR2-10	.5FR2HC-10	—
		1μ	1.00 mm	1FR2-10	1FR2HC-10	—
		2μ	1.00 mm	2FR2-10	2FR2HC-10	2FR2TI-10
		10μ	1.00 mm	10FR2-10	—	—
Pkg of 10:	1/4" frits	0.5μ	1.00 mm	.5FR4-10	—	—
		2μ	1.00 mm	2FR4-10	2FR4HC-10	2FR4TI-10
		10μ	1.00 mm	10FR4-10	10FR4HC-10	—

**WHICH FRIT FITS MY FILTER?**

**1/16" frit fits:**

- ZUFR.5F
- ZBUFR.5F
- ZRUFR1.5F
- ZBRUFR1.5F

**1/8" frit fits:**

- ZUFR1CF
- ZBUFR1CF
- ZUFR1F
- ZBUFR1F
- ZRUFR21F
- ZBRUFR21F

**1/4" frit fits:**

- ZUFR2F
- ZBUFR2F
- ZRUFR41F
- ZBRUFR41F
- ZRUFR42F
- ZBRUFR42F

**WHICH SCREEN FITS MY FILTER?**

**1/16" screen fits:**

- ZUFR.5
- ZBUFR.5
- ZRUFR1.5
- ZBRUFR1.5

**1/8" screen fits:**

- ZUFR1C
- ZBUFR1C
- ZUFR1
- ZBUFR1
- ZRUFR21
- ZBRUFR21

**1/4" screen fits:**

- ZUFR2
- ZBUFR2
- ZRUFR41
- ZBRUFR41
- ZRUFR42
- ZBRUFR42

**Replacement screens**

Other sizes may be available or special ordered in OEM quantities. 20μ and 75μ screens are also available.

Note: If a filter was ordered with a removable screen, the screen **cannot** be replaced with a frit.



Package of 10:	Pore Size	Screen Thickness	Stainless Steel Prod No
1/32" screens	<1μ	0.040 mm	.5SR.5-10
	1μ	0.050 mm	1SR.5-10
	2μ	0.075 mm	2SR.5-10
	10μ	0.125 mm	10SR.5-10
1/16" screens	<1μ	0.040 mm	.5SR1-10
	1μ	0.050 mm	1SR1-10
	2μ	0.075 mm	2SR1-10
	10μ	0.125 mm	10SR1-10
1/8" screens	<1μ	0.040 mm	.5SR2-10
	1μ	0.050 mm	1SR2-10
	2μ	0.075 mm	2SR2-10
	10μ	0.125 mm	10SR2-10
1/4" screens	<1μ	0.040 mm	.5SR4-10
	1μ	0.050 mm	1SR4-10
	2μ	0.075 mm	2SR4-10
	10μ	0.125 mm	10SR4-10

**TECH TIP**

Our screen materials are described in terms of *nominal* micron retention. For example, a screen with a 2 μ pore size will retain *most* particles 2 μ or larger, but the *absolute* retention will be of particles 7-8 μ in diameter or larger. This is true only of the smallest pore screens:

Pore size	Nominal retention	Absolute retention
<1μ	<1μ	5-6μ
1μ	1μ	6-7μ
2μ	2μ	7-8μ
10μ	10μ	11-13μ

**VALCO FITTINGS**

**Custom socket wrenches**

These socket wrenches have a slot to slip over the tubing, making them especially useful when nuts are difficult to access with an open end wrench. The SWH4 works with all types of 1/4" hex nuts, such as Valco 1/16" ZDV fitting nuts. The SWH3 fits our 1/32" nuts.

<i>Size</i>	<i>Prod No</i>
3/16"	SWH3
1/4"	SWH4



**Ferrule removal kits**

Remove polymeric ferrules stuck in fitting details. One version is for 1/32" and 360 micron ferrules, and the other version is for 1/16" and 1/8" ferrules.

	<i>Prod No</i>
For 360 µm, FS, and 1/32"	FRK1
For 1/16" and 1/8"	FRK2



**For 360 µm and 1/32" ferrules**



**For 1/16" and 1/8" ferrules**

**Hex key set**

The hex key set has a wrench to fit any socket head screw on any VICI valve or actuator. Includes the following sizes: .050", 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", and 5/32".

<i>Prod No</i>
HKS



**TECH TIP**

If a fused silica tube breaks off in a through-type union, remove the nuts and the tube opposite the broken one. Clear the fitting by passing a drill or wire of the appropriate diameter into the unbroken side and through the center of the fitting.

Our ferrule removal kit can be used to remove ferrules from tee and cross fittings.





### Open end wrenches

Size	For use with	Prod No
3/16" x 1/4"	1/32" and 1/16" nuts	OEW
3/8" x 7/16"	1/8" nuts	OEW-2
1/2" x 9/16"	1/4" nuts	OEW-3



### Pin vise and drill index

The drill index has drills sized from 0.0135" to 0.039" (0.34 to 1 mm). These are useful tools when a fused silica tube breaks in a union (see *Tech Tip on the facing page*), and for enlarging the inner diameter of fused silica adapters.

Prod No

PV

### Template

This tool is just what you need when you're working out plumbing and valve switching schematics. It features templates for two position valves with 4, 6, 8, and 10 ports with indications of both positions, as well as various flow symbols. For added convenience, the sides are edged with metric and inch rulers.

Prod No

TEMPLATE1



### Mirror

Helpful to get access to valve serial numbers and to check discharge on pulsed discharge detectors (PDD).

Prod No

MR



#### MORE INFORMATION

Tools for valves  
 Pencil magnet . . . . p 210  
 Valve spanner  
 handle. . . . . 211  
 Tightening tools  
 for PEEK fittings. . . . . 67  
 Tubing accessories .90, 92

# Cheminert® fittings

INERT AND BIOCOMPATIBLE

Cheminert fittings are available for high and low pressure applications, and are ideally suited for applications requiring an inert, biocompatible, metal-free flowpath. Wetted materials are PFA, FEP, CTFE, or PEEK, and uniform flow passages minimize mixing. All connections have zero dead volume.

## High pressure fittings

Cheminert high pressure fittings are rated at 5000 psi with fingertight nuts, well beyond the burst strength of most PEEK tubing. These fittings are machined from high quality inert polymers to the same exacting tolerances as our popular Valco zero dead volume fittings, and the taper angle and detail design conform to the industry standard established by the Valco line.

## High pressure Nanovolume® fittings

VICI Nanovolume® fittings generally have bore sizes of 100-150 µm (.004" - .006"), with some as small as 50 µm (.002"). The minimal transfer volume contributed by Nanovolume® components makes them especially beneficial in applications with flow rates in the µl/min range, when the transfer volume can be critical.

### 360 Micron Nanovolume® Fittings

Our newest high pressure fittings permit direct connection of 360 micron OD fused silica, PEEK, stainless, or electroformed nickel tubing without the use of liners. The ferrule snaps into the nut so that the fitting is "one-piece", but the ferrule remains free to rotate as the nut is tightened so that the tube doesn't twist. Because of the compact size and fine 2-56 threads, a leak-free connection that seals at pressures in excess of 20,000 psi can be easily formed with the available manual tool.

### 1/32" Nanovolume® Fittings

1/32" fittings, with 50 - 150 µm bore, are ideal for high resolution capillary chromatography. Rated at 5,000 psi with fingertight nuts, they will remain leak-tight well beyond the burst strength of most PEEK tubing. These fittings are machined from high quality inert polymers to the same exacting tolerances as our popular Valco zero dead volume fittings, and the taper angle and detail design conform to the industry standard established by the Valco line.

#### TECH TIP

For optimal zero dead volume connections, make sure your tubing meets the best industry standards. OD tolerance should be nominal dimension ± .002".

Fractional dimension	Nominal dimension
1/32"	.031
1/16"	.062
1/8"	.125
1/4"	.250
3/8"	.375
1/2"	.500

#### MORE INFORMATION

High pressure Cheminert fittings . . . . . pp 57-67  
Low pressure Cheminert fittings . . . . . 68-77  
Nanovolume® fittings . . . . . 57-61  
Valco fittings . . . . . 6-55

#### CONVERSIONS

10,000 psi = 689.5 bar  
20,000 psi = 1,378.9 bar



**CHEMINERT FITTINGS**



- For direct connection of 360 µm tubing
- Work with metal, fused silica, or PEEK
- Up to 20,000 psi (liquid) with metal or fused silica tubing
- Snap-in rotating ferrule for "one-piece" fitting with no tubing twist
- Eliminate use of liners

Our new high pressure fittings permit direct connection of 360 micron OD fused silica, PEEK, stainless, or electro-formed nickel tubing without the use of liners. The ferrule snaps into the nut so that the fitting is "one-piece," but the ferrule remains free to rotate as the nut is tightened so that the tube doesn't twist. Because of the compact size and fine 2-56 threads, a leak-free connection that seals at pressures in excess of 20,000 psi can be easily formed with the available

manual tool. 360 µm fittings are dedicated for use with either fused silica, metal, or PEEK tubing; components cannot be mixed or used with a different tubing material. Tees and crosses offer a choice of three bore sizes, and feature a "quick-mount" base with adhesive backing to make sure that the fitting is stable and fragile tubing doesn't get broken. There is also a quick-mount PEEK union.

**For PEEK or fused silica tubing — up to 10,000 psi liq\***

These fittings are constructed from premium grade natural PEEK material. They are intended for use with PEEK or fused silica tubing at pressures up to 10,000 psi, or the maximum pressure for which the tubing is rated, whichever is lower. Quick-mount versions have an integral base with double stick tape to secure fittings to a surface.

\*or burst pressure of tubing

**DIRECT CONNECTIONS TO 1/32" AND 1/16"**

Valco 360 micron reducers directly connect 360 µm tubing to 1/16" or 1/32" Valco valve or fitting details, providing a positive leak-free seal with zero dead volume.

Internal fittings . . . pg 38



**MORE INFORMATION**

Nanovolume® fittings  
 For fused silica tubing, 10,000+ psi liq . . pg 58  
 For metal tubing, up to 20,000 psi liq . 58  
 1/32" Nanovolume® fittings . . . . .59-61  
 Injectors with 360 micron fittings. . 154

**CONVERSIONS**

- 50 µm = .002"
- 100 µm = .004"
- 150 µm = .006"
- 0.25 mm = .010"
- 0.50 mm = .020"
- 0.75 mm = .030"
- 1/32" = 0.8 mm
- 1/16" = 1.6 mm




**Nut/ferrules, caps, plugs, tightening tool**

*for 360 µm tubing*

	<i>Prod No</i>
 Nut/ferrule	C360NFPK
 Cap	C360CPK
 Plug	C360PPK
 Tightening tool	C360ET



**Unions and reducing unions**

*for 360 µm tubing*

	<b>Bore size:</b>	<b>50 micron</b>	<b>100 micron</b>	<b>150 micron</b>
		<i>Prod No</i>	<i>Prod No</i>	<i>Prod No</i>
 Union, quick mount		C360QUPK2	C360QUPK4	C360QUPK6
 Union		C360UPK2	C360UPK4	C360UPK6
 Reducing union, 1/16" to 360 µm		—	—	C360RU1PK6

**Tees and crosses**

*for 360 µm tubing*

	<b>Bore size:</b>	<b>50 micron</b>	<b>100 micron</b>	<b>150 micron</b>
		<i>Prod No</i>	<i>Prod No</i>	<i>Prod No</i>
 Tee, quick mount		C360QTPK2	C360QTPK4	C360QTPK6
 Cross, quick mount		C360QXPK2	C360QXPK4	C360QXPK6



**CHEMINERT FITTINGS**

**For fused silica tubing — 10,000 psi liq and above\***




These fittings are constructed from HPLC grade stainless steel, with a stainless steel nut and a special ferrule which is precision machined from electroformed nickel. For optimal sealing characteristics, the ferrule is gold plated.

\*or burst pressure of tubing

**Nut/ferrules and caps** *for 360 µm FS tubing*

		<i>Prod No</i>
	Nut/ferrule	C360NFFS
	Cap	C360CFS

**Unions and reducing unions** *for 360 µm FS tubing*



	<b>Bore size:</b>	<b>50 micron</b>	<b>100 micron</b>	<b>150 micron</b>
		<i>Prod No</i>	<i>Prod No</i>	<i>Prod No</i>
	Union	C360UFS2	C360UFS4	C360UFS6
	Reducing unions, 1/32" to 360 µm	C360RU.5FS2	C360RU.5FS4	C360RU.5FS6
	Reducing union, 1/16" to 360 µm	—	—	C360RU1FS6

**For metal tubing — up to 40,000 psi liq\*\***




Our highest pressure Nanovolume® fittings are constructed of HPLC grade stainless steel, including stainless steel nut and ferrule. These fittings are optimized for use with stainless or electroformed nickel tubing.

\*\*or burst pressure of tubing. Higher pressures may be possible with smaller IDs. Consult factory.

**Nut/ferrules and caps** *for 360 µm tubing*

		<i>Prod No</i>
	Nut/ferrule	C360NFS6
	Cap	C360C

**Unions and reducing unions** *for 360 µm tubing*

	<b>Bore size:</b>	<b>50 micron</b>	<b>100 micron</b>	<b>150 micron</b>
		<i>Prod No</i>	<i>Prod No</i>	<i>Prod No</i>
	Union	C360US62	C360US64	C360US66
	Reducing unions, 1/32" to 360 µm	C360RU.5S62	C360RU.5S64	C360RU.5S66
	Reducing union, 1/16" to 360 µm	—	—	C360RU1S66

**DIRECT CONNECTIONS TO 1/32" AND 1/16"**

Valco 360 micron reducers directly connect 360 µm tubing to 1/16" or 1/32" Valco valve or fitting details, providing a positive leak-free seal with zero dead volume.

Internal fittings . . . . p 38  
External fittings . . . . . 39



**TECH TIP**

Use these **metal 360 micron nuts** with nano injectors:

C72MU . . . . . p 154  
C72MX . . . . . 154

**MORE INFORMATION**

360 µm Nanovolume® fittings for use  
below 10,000 psi liq. . 57  
360 µm tubing  
Electroformed nickel. 87  
PEEK . . . . . 90  
1/32" Nanovolume® fittings . . . . . 59-61

**CONVERSIONS**

50 µm	=	.002"
100 µm	=	.004"
150 µm	=	.006"
1/32"	=	0.8 mm
1/16"	=	1.6 mm

**NOTE**

For metal 360 µm tees and crosses, contact the factory.

**CHEMINERT FITTINGS**







Designed for high resolution capillary HPLC, Cheminert Nanovolume® connectors include our one-piece 1/32" fingertight fittings, with a patented\* collapsible ferrule that makes fingertight nanovolume connections a snap. These fittings work with a variety of tubing,

including PEEK, fused silica, and 1/32" electroformed nickel. Liners adapt the fittings for use with fused silica. To avoid potential confusion, all fittings utilizing the Cheminert collapsible ferrule are made of black PEEK; fittings with a standard Valco ZDV fitting detail are natural PEEK.

**Nuts, ferrules, and plugs**

for 1/32" tubing

Valves and fittings are supplied with the appropriate quantity of nuts and ferrules. However, if additional fittings are required, they may be ordered separately. The two internal nuts include collapsible ferrules as an integral part of the fitting; the external nut must be used with the separate ferrule listed below.

		<i>Prod No</i>
	<b>Internal nut</b> with collapsible ferrule <i>For use with: Fittings on pages 59-61</i>	C-NNFFPK
	<b>External nut</b> <i>For use with: Unions on page 60 Column end fittings on page 61</i>	C-EN.5FPKB
	Note: Requires collapsible PEEK ferrule, below	
	<b>Collapsible PEEK ferrule</b> <i>For use with: External nut, above</i>	ZGF.5PK
	<b>Internal plug</b> <i>For use with: Fittings on page 59-60</i>	C-NPFPK

**TECH TIP**

Our liners adapt Nanovolume® tees, Y's, and crosses for use with fused silica tubing. They must be ordered separately.




Liners ..... page 60

**MORE INFORMATION**

360 µm fittings . . . pp 57-58  
 1/32" Nanovolume® column end fittings . . 61  
 Tubing  
 PEEK ..... 90  
 Electroformed nickel ..... 87  
 Unions for fused silica tubing ..... 60


**Unions**

for 1/32" tubing

	<b>100 µm bore</b> <b>150 µm bore</b>
	<i>Prod No</i> <i>Prod No</i>
Union for 1/32" PEEK or electroformed nickel tubing Does not require or include liners.	C-NEU.5XFPK   C-NEU.5FPK

**Reducing unions**

1/16" to 1/32" tubing

	<b>150 µm bore</b>
	<i>Prod No</i>
Reducing union, 1/16" to 1/32" tubing	C-NERU1FPK

**TECH TIP**

Use our internal nuts with collapsible ferrules for old style Cheminert CN2 and CN4 valves.

C-NNFFPK  
*For use with:*  
 6 port valve CN2-4346  
 4 port internal sampling injector CN4-4344



C-NNFLFPK  
*For use with:*  
 10 port valve CN2-4340



C-NVISF fill port  
 for 26 gauge needles  
*For use with: CN2 valves.*



Consult factory regarding CN2 and CN4 valves.

**Tees, y's, and crosses**

for 1/32" tubing or FS\* tubing

		<b>100 µm bore</b>	<b>150 µm bore</b>
		<i>Prod No</i>	<i>Prod No</i>
Tee	1/32" tubing or fused silica*	C-NTXFPK	C-NTFPK
Y	1/32" tubing or fused silica*	C-NYXFPK	C-NYFPK
Cross	1/32" tubing or fused silica*	C-NXXFPK	C-NXFPK



\*A liner is needed for use with fused silica. Order 27 mm length, page 60.


\*U.S. patent no. 6,575,501

**CHEMINERT FITTINGS**

**Unions**

*for fused silica tubing*

	<i>FS tubing OD</i>	<b>100 µm bore</b> <i>Prod No</i>	<b>150 µm bore</b> <i>Prod No</i>
Union for fused silica tubing Includes liners.	125 -175 µm	C-NEU.5XFPK.15	C-NEU.5FPK.15
	175 -225 µm	C-NEU.5XFPK.20	C-NEU.5FPK.20
	225 -275 µm	C-NEU.5XFPK.25	C-NEU.5FPK.25
	275 -325 µm	C-NEU.5XFPK.30	C-NEU.5FPK.30
	325 -375 µm	C-NEU.5XFPK.35	C-NEU.5FPK.35

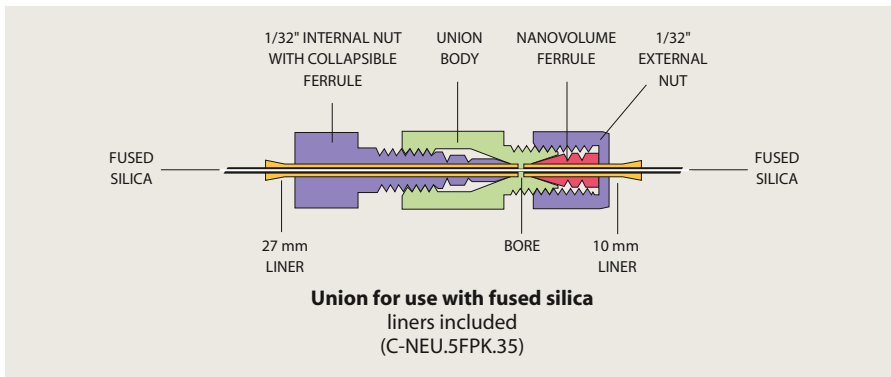

**Liners for 1/32" connectors**

*for use with fused silica tubing*

Use these natural PEEK liners to adapt 1/32" connectors to the most common sizes of fused silica tubing.

The 27 mm liners are for internal nuts with collapsible ferrules. 10 mm liners are for use with external nuts. Sold in packages of 5.

**27 mm liners**

Use with internal nuts C-NNFFPK or C-NNFLFPK

	<i>For tubing OD</i>	<i>Prod No</i>
	125 - 175 µm	C-NL.15L-5
	175 - 225 µm	C-NL.20L-5
	225 - 275 µm	C-NL.25L-5
	275 - 325 µm	C-NL.30L-5
	325 - 375 µm	C-NL.35L-5

**10 mm liners**

Use with external nut C-EN.5FPKB

	<i>For tubing OD</i>	<i>Prod No</i>
	125 - 175 µm	C-NL.15S-5
	175 - 225 µm	C-NL.20S-5
	225 - 275 µm	C-NL.25S-5
	275 - 325 µm	C-NL.30S-5
	325 - 375 µm	C-NL.35S-5

**1/32" Nanovolume® frits**

These frits are the answer to filtration of 1/32" Nanovolume® fitting connections. A mere .25 mm (0.010") thin and 1/32" in diameter, they can be placed in any 1/32" fitting detail and add minimal volume. Price is for a package of 5 frits.

<i>Pkg/5:</i>	<i>Pore size</i>	<i>Prod No</i>
	0.2 micron	.2FR.5-5
	0.5 micron	.5FR.5-5
	2 micron	2FR.5-5

**TECH TIP**

Use **27 mm liners**

with internal nuts with collapsible ferrules:



Use **10 mm liners**

with external nuts:



**MORE INFORMATION**

360 µm fittings . . . pp 57-58  
 1/32" Nanovolume®  
 Fittings . . . . . 59-61  
 External nuts . . . . . 59  
 Internal nuts with  
 collapsible ferrules . 59  
 Liners for column end  
 fittings . . . . . 61  
 More unions for fused  
 silica . . . . . 19, 58



Screen embedded in end of liner for column end fittings

Nanovolume® column end fittings include two liners to adapt the 1/32" fitting to fused silica. The 27 mm liner, used inside the internal nut, has a 1 µm 316 stainless steel screen embedded in the PEEK to provide closure for fused silica columns. The 10 mm liner is used with the external nut.

The design utilizes our one-piece 1/32" fingertight fittings, with a patented\* collapsible ferrule. To avoid potential confusion, all fittings utilizing the Cheminert collapsible ferrule are made of black PEEK. The liners are natural PEEK.


\*U.S. patent no. 6,575,501.



### Column end fittings

for fused silica capillary columns

Each:	For tubing OD	100 µm bore	150 µm bore
		Prod No	Prod No
Column end fitting for fused silica tubing	125 - 175 µm	C-NEF.5XFPK.15S1	C-NEF.5FPK.15S1
Includes liners	175 - 225 µm	C-NEF.5XFPK.20S1	C-NEF.5FPK.20S1
	225 - 275 µm	C-NEF.5XFPK.25S1	C-NEF.5FPK.25S1
	275 - 325 µm	C-NEF.5XFPK.30S1	C-NEF.5FPK.30S1
	325 - 375 µm	C-NEF.5XFPK.35S1	C-NEF.5FPK.35S1

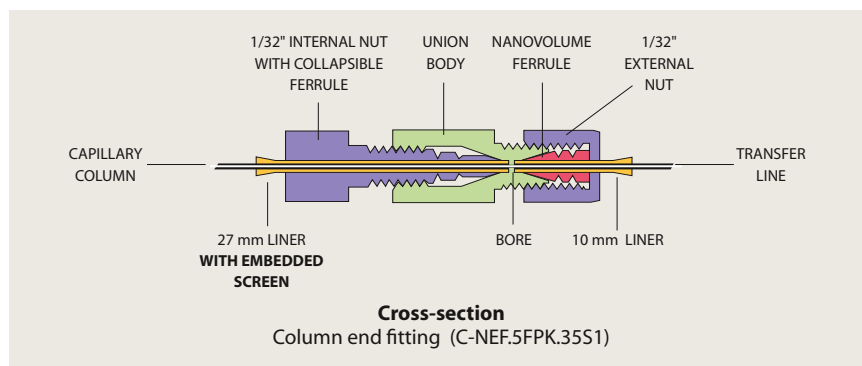

### TECH TIP

Liners with embedded screens are also available for 1/16" PEEK tubing. Consult the factory for sizes and product numbers.

### CONVERSIONS

100 µm = .004"
150 µm = .006"
0.25 mm = .010"
0.50 mm = .020"
0.75 mm = .030"
1.0 mm = .040"
1.5 mm = .060"
2.0 mm = .080"
4.6 mm = .180"
6.0 mm = .236"
6.4 mm = .253"
7.0 mm = .275"
10.0 mm = .400"
27.0 mm = 1.08"
1/32" = 0.8 mm
1/16" = 1.6 mm
1/8" = 3.2 mm
1/4" = 6.4 mm
3/8" = 9.5 mm
1/2" = 12.7 mm


### Replacement liners for column end fittings

for FS capillaries

Use these liners with Nanovolume® column end fittings to adapt to the most common sizes of fused silica tubing. Natural PEEK, with embedded screen to provide full closure for fused silica capillaries. Sold individually.

#### 27 mm liners for column end fittings

For tubing OD	Prod No
125 - 175 µm	C-NL S1.15
175 - 225 µm	C-NLS1.20
225 - 275 µm	C-NLS1.25
275 - 325 µm	C-NLS1.30
325 - 375 µm	C-NLS1.35

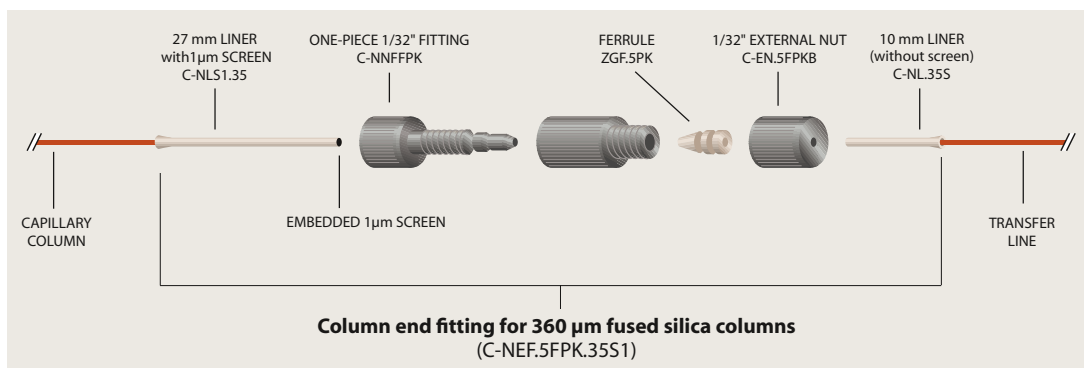

## CHEMINERT FITTINGS

### No twist one-piece fittings *for 1/32" and 1/16" tubing*

These patented\* fittings offer the convenience of a one-piece fitting while solving a problem inherent to such designs. In other one-piece designs, the ferrule rotates against the fitting detail, creating particulates. The no twist design has a separate ferrule that snaps into the nut, so it's attached but still free to avoid rotation during tightening.

Since the ferrule is not machined onto the nut, it can be made from a different material; PEEK nut with PEEK ferrule, or PEEK nut with CTFE ferrule – the possibilities are endless.

Optional ferrule materials available – FEP, PFA, PTFE, and glass-filled PTFE. Call for availability.



Package of 5:		Glass-filled PEEK ferrule	PEEK ferrule	CTFE ferrule
	Length	Prod No	Prod No	Prod No
1/32" hex	Short	ZNF.5PKG-5	ZNF.5PK-5	—
1/16" hex	Short	ZNF1PKG-5	ZNF1PK-5	ZNF1KF-5
	Medium	MZNF1PKG-5	MZNF1PK-5	MZNF1KF-5
	Long	LZNF1PKG-5	LZNF1PK-5	LZNF1KF-5
1/16" fingertight		ZNF1FPKG-5	ZNF1FPK-5	ZNF1FKF-5

\* Patent No. 7,316,777

### CONVERSIONS

0.25 mm = .010"
0.50 mm = .020"
0.75 mm = .030"
1.0 mm = .040"
1.5 mm = .060"
2.0 mm = .080"
4.6 mm = .180"
6.0 mm = .236"
6.4 mm = .253"
7.0 mm = .275"
10.0 mm = .400"
27.0 mm = 1.08"
1/32" = 0.8 mm
1/16" = 1.6 mm
1/8" = 3.2 mm
1/4" = 6.4 mm
3/8" = 9.5 mm
1/2" = 12.7 mm





**Internal nuts – high pressure PEEK**

PEEK nuts are used in Cheminert polymeric valves with zero dead volume fittings. They can also be used as alternatives to standard stainless steel Valco nuts when polymeric ferrules are used (up to approximately 125°C). Fingertight nuts have a knurled surface designed to provide sufficient sealing force on the ferrule without wrenches. Hex style nuts allow wrench tightening; however, since they are polymeric, they can break and are recommended for use only when space is limited and fingers won't fit.

**Caution:** PEEK nuts are intended for use only with polymeric ferrules, which seal with lower force than their stainless steel counterparts. Overtightening can result in breakage.

Package of 10:	Prod no	Length
1/32" fingertight	ZN.5FPK-10	.42"
1/32" fingertight	LZN.5FPK-10	.54"
1/16" fingertight	ZN1FPK-10	.88"
1/16" hex	ZN1PK-10	.45"
1/16" hex	MZN1PK-10	.62"
1/16" hex	LZN1PK-10	.87"
1/8" hex	ZN2PK-10	.62"



**Ferrules – high pressure PEEK and glass-filled PEEK**

PEEK ferrules seal by the increased friction from compression. Use PEEK ferrules with PEEK fittings and glass-filled PEEK with stainless steel fittings.

Package of 10:	PEEK	Glass-filled PEEK
	Prod No	Prod No
1/32"	ZF.5PK-10	ZF.5PKG-10
1/16"	ZF1PK-10	ZF1PKG-10
1/8"	ZF2PK-10	ZF2PKG-10
1/4"	ZF4PK-10	ZF4PKG-10
3/8"	ZF6PK-10	ZF6PKG-10
1/2"	ZF8PK-10	ZF8PKG-10



**Ferrules – grooved PEEK**

These patented ferrules\* feature a grooved design that permits the ferrule to grip the tube in multiple places. They work great on tubing that is softer than the ferrule material. For example, PEEK grooved ferrules work well on PTFE or FEP tubing. They are not recommended for use with PEEK tubing.

Package of 10:	Prod No
1/32"	ZGF.5PK-10
1/16"	ZGF1PK-10

\* Patent no. 6,575,501.

**POLYMERS AT A GLANCE**  
 PEEK .....PK  
 Chemical resistance;  
 up to 125°C

**MORE INFORMATION**  
 Tightening tool for  
 hex-head PEEK nuts. . 67

## CHEMINERT FITTINGS

### Plugs and caps – high pressure PEEK

PEEK plugs and caps are available in knurled fingertight and wrench-tight hex nut designs, for use in valves or fittings. (See discussion of PEEK nuts on page 63.) PEEK caps include a PEEK nut and ferrule.



Description	Length of nut*	PEEK plugs		PEEK caps	
		Prod No	Prod No	Prod No	Prod No
1/32" fingertight	.42"	ZP.5FPK	ZC.5FPK		
1/32" fingertight	.54"	LZP.5FPK	—		
1/16" fingertight	.87"	ZP1FPK	ZC1FPK		
1/16" hex	.62"	MZP1PK	ZC1PK		
1/16" long hex	.87"	LZP1PK	—		
1/8" hex	.62"	ZP2PK	ZC2PK		

### PEEK plugs for high pressure polymeric valves

These PEEK plugs are for use **only** in Cheminert HPLC PEEK valves (C1-C5 series) since the fitting detail in these valves has an extended pilot length.

Description	Length of nut*	Prod No
1/16" hex	.62"	C-MZP1PK
1/16" long hex	.87"	C-LZP1PK
1/16" fingertight	.88"	C-ZP1FPK



### Tees and crosses – high pressure PEEK

Tees connect three lines. Crosses connect four lines. The 1/32" and 1/16" nuts are fingertight; 1/8" nuts are hex, for wrench tightening.

Tubing		PEEK tees		PEEK crosses	
OD	Bore	Prod No	Prod No	Prod No	Prod No
1/32"	0.25 mm	ZT.5FPK	ZX.5FPK		
	0.50 mm	ZT.5LFPK	ZX.5LFPK		
1/16"	0.25 mm	ZT1CFPK	ZX1CFPK		
	0.50 mm	ZT1MFPK	ZX1MFPK		
	0.75 mm	ZT1FPK	ZX1FPK		
	1.00 mm	ZT1LFPK	ZX1LFPK		
1/8"	0.75 mm	ZT2PK	ZX2PK		
	2.00 mm	ZT2LPK	ZX2LPK		



### POLYMERS AT A GLANCE

PEEK (PK) . . . . . page 256  
*Chemical resistance; up to 125°C*

### TECH TIP

Ferrules for high pressure PEEK fittings are available in PEEK and PFA.

PEEK ferrules . . . . . 63  
 PFA ferrules . . . . . 13

### MORE INFORMATION


Low pressure plugs . . . . . 71  
 Tightening tool for hex-head PEEK nuts. . 67

### CONVERSIONS

- 0.25 mm = .010"
- 0.50 mm = .020"
- 0.75 mm = .030"
- 1.0 mm = .040"
- 1.5 mm = .060"
- 2.0 mm = .080"
- 4.6 mm = .180"
- 6.0 mm = .236"
- 6.4 mm = .253"
- 7.0 mm = .275"
- 10.0 mm = .400"
- 27.0 mm = 1.08"
- 1/32" = 0.8 mm
- 1/16" = 1.6 mm
- 1/8" = 3.2 mm
- 1/4" = 6.4 mm
- 3/8" = 9.5 mm
- 1/2" = 12.7 mm

**Internal unions – high pressure PEEK**


The 1/32" nuts are fingertight; 1/16" nuts are available in a choice of fingertight or hex; and 1/8" nuts are hex, for wrench tightening.

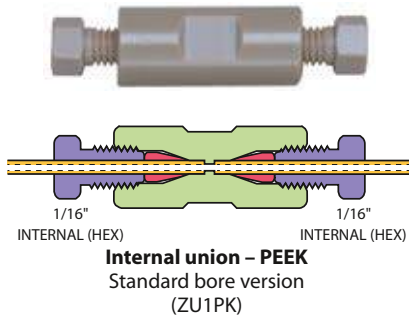

Tube OD	Bore	Standard Prod No	Bulkhead Prod No	Bulkhead panel hole diameter
<b>1/32" fingertight</b>				
	0.25 mm	ZU.5FPK	ZBU.5FPK	5/16"
	0.50 mm	ZU.5LFPK	ZBU.5LFPK	5/16"
	1/32"	ZU.5TFPK	ZBU.5TFPK	5/16"
<b>1/16" fingertight</b>				
	0.25 mm	ZU1CFPK	ZBU1CFPK	3/8"
	0.50 mm	ZU1MFPK	ZBU1MFPK	3/8"
	0.75 mm	ZU1FPK	ZBU1FPK	3/8"
	1/16"	ZU1TFPK	ZBU1TFPK	3/8"
<b>1/16" hex</b>				
	0.25 mm	ZU1CPK	ZBU1CPK	3/8"
	0.50 mm	ZU1MPK	ZBU1MPK	3/8"
	0.75 mm	ZU1PK	ZBU1PK	3/8"
	1/16"	ZU1TPK	ZBU1TPK	3/8"
<b>1/8" hex</b>				
	0.75 mm	ZU2PK	ZBU2PK	7/16"
	2.0 mm	ZU2LPK	ZBU2LPK	7/16"
	1/8"	ZU2TPK	ZBU2TPK	7/16"

**Internal reducing unions – high pressure PEEK**

These unions connect two different sizes of tubing, with zero dead volume internal fittings on each end. In the bulkhead version, the bulkhead nut is on the side with smaller tubing. The 1/32" and 1/16" nuts are fingertight; 1/8" nuts are hex, for wrench tightening. A version with 1/16" and 1/8" hex nuts is also available.

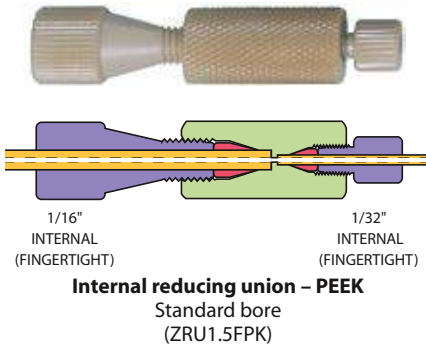

Tube OD	Bore	Standard Prod No	Bulkhead Prod No	Bulkhead panel hole diameter
<b>1/16" to 1/32"</b>				
	0.25 mm	ZRU1.5FPK	ZBRU1.5FPK	5/16"
	0.50 mm	ZRU1.5LFPK	ZBRU1.5LFPK	5/16"
	1/32"	ZRU1.5TFPK	ZBRU1.5TFPK	5/16"
<b>1/8" to 1/32"</b>				
	0.25 mm	ZRU2.5FPK	ZBRU2.5FPK	3/8"
	0.50 mm	ZRU2.5LFPK	ZBRU2.5LFPK	3/8"
	1/32"	ZRU2.5TFPK	ZBRU2.5TFPK	3/8"
<b>1/8" to 1/16"</b>				
	0.25 mm	ZRU21CFPK	ZBRU21CFPK	3/8"
	0.75 mm	ZRU21FPK	ZBRU21FPK	3/8"
	1.00 mm	ZRU21LFPK	ZBRU21LFPK	3/8"
	1/16"	ZRU21TFPK	ZBRU21TFPK	3/8"

**Internal/external reducing union – high pressure PEEK**



Tube OD	Bore	Prod No
1/16" to 1/32"	0.20 mm	ZERU1.5FPK

## CHEMINERT FITTINGS

### One-piece fingertight fittings – color-coded PEEK

These molded fingertight fittings are rated to 5000 psi (350 bar), so they can be used in virtually any HPLC fitting detail with 10-32 threads. Six colors allow easy identification of tubing lines.

Package of 5:

Color	Prod No
Natural	JR-55020-5
Black	JR-55021-5
Red	JR-55022-5
Yellow	JR-55023-5
Blue	JR-55024-5
Green	JR-55025-5



### One-piece PEEK fingertight fittings – narrow hex-head

This natural PEEK machined fitting has a narrow hex head and 10-32 threads.

Package of 5:

Color	Prod No
Natural	JR-5508-5



### Color-It fingertight adapters

Use Color-It snap-on extensions to color-code our 1/4" hex-head nuts, and turn the nut into a fingertight fitting at the same time. Color-It adapters are available in six different colors, and can be used with PEEK and stainless hex-head nuts.

Package of 5:

Color	Prod No
Blue	JR-55010-5
Yellow	JR-55011-5
Green	JR-55012-5
Black	JR-55013-5
White	JR-55014-5
Red	JR-55015-5



Package of 12:

Color	Prod No
Multi-color (2 of each color)	JR-55016-12

#### CAUTION

One-piece combination nuts and ferrules are not for high pressure gas service.

#### MORE INFORMATION

Color-coded PEEK tubing ... page 91

#### CONVERSIONS

0.25 mm	= .010"
0.50 mm	= .020"
0.75 mm	= .030"
1.0 mm	= .040"
1.5 mm	= .060"
2.0 mm	= .080"
4.6 mm	= .180"
6.0 mm	= .236"
6.4 mm	= .253"
7.0 mm	= .275"
10.0 mm	= .400"
27.0 mm	= 1.08"
1/32"	= 0.8 mm
1/16"	= 1.6 mm
1/8"	= 3.2 mm
1/4"	= 6.4 mm
3/8"	= 9.5 mm
1/2"	= 12.7 mm



**PEEK starter kit**

In LC applications involving proteins, peptides, nucleic acids, or other samples of biological origin, metal systems may interact with samples or release transition metals that will deactivate columns. The PEEK starter kit facilitates replacement of stainless steel tubing, fittings, ferrules, mobile phase filters, etc., to create a biocompatible environment for samples and mobile phase.

*Prod No*

PEEK starter kit

JR-35P

*Includes:*

- 1 Plastic box
- 10 PEEK one-piece fittings, 10-32
- 5 PEEK fingertight fittings
- 5 PEEK nuts, hex-head, long
- 20 PEEK ferrules, double-ended, 1/16"
- 1 PEEK union, HP body only, 10-32
- 2 Tubing elbows, 90°
- 2 Tubing elbows, 180°
- 1 PEEK filter, in-line,  
incl. PAT frit, 5 µm
- 1 Clean-cut tubing cutter
- 1 Last Drop PTFE filter, 5 µm
- 3m PEEK tubing, 1/16" x 0.25 mm ID,  
blue stripe
- 3m PEEK tubing, 1/16" x 0.50 mm ID,  
orange stripe
- 1 Tweezers

**Tightening tools for Valco and Cheminert fittings**

These handy tools make it fast and easy to tighten hex-head fittings. The red version is for use with the C360 series fittings shown on pages 57-58. The green tool is for any 1/32" fitting with a 3/16" hex head nut, and the blue version fits the 1/4" hex common in fittings for 1/16" tubing. The black tool is designed especially for the unique 1/16" tube fittings with 6-40 threads used in the new C25G selector on page 178.



<i>Color</i>	<i>For use with</i>	<i>Prod No</i>
Red	360 µm fittings	C360ET
Green	1/32" fittings (6-40 threads)	CNFT
Blue	1/16" fittings	ZNFT
Black	6-40 fittings for C25G valves	CGFT

**MORE INFORMATION**

- Hex-head PEEK fittings
- 360 µm . . . . . page 57
- 1/32" . . . . . 62-63
- 1/16"
- High pressure . . . 62-63
- Low pressure . . . . . 71
- C25G selectors . . . . . 178

**CHEMINERT FITTINGS**

Cheminert low pressure fittings are ideally suited for flow injection analysis, low pressure liquid chromatography, and stream sampling devices. They may be safely used at pressures up to 500 psi and temperatures to 50°C. Two designs of low pressure tube end fittings

are available. *Flangeless* tube end fittings utilize a collapsible ferrule, which grips the tubing as the fitting is tightened without significantly reducing the tube ID. *Standard* tube end fittings are retained on polymeric tubing by a flange formed with a Cheminert flanging tool.

**Flangeless tube end fittings**

1/4-28

Flangeless tube end fittings eliminate the flanging tool required with standard tube end fittings. The nut turns on the tubing as freely as with our flanged fitting, eliminating the possibility of cracking or unscrewing that can occur when plastic tubing is subjected to twisting as fittings are connected.

Cheminert flangeless fittings include our patented\* collapsible ferrule design. This innovative design utilizes a one-piece ferrule engineered to collapse as it is tightened. The collapse occurs in a narrow area, resulting in a very effective seal with virtually no distortion of the tubing ID and no dead volume. The assembly is rated at 500 psi liquid when tightened by hand. Since only the tubing and the ferrule come into contact with the solution, the result is an inert system.

Cheminert tube end fittings come in twelve different colors for system color coding, and work with any 1/16" or 1/8" OD polymeric tubing. Use CTFE ferrules for soft tubing (PTFE, FEP, etc.) and PEEK ferrules for harder tubing (PEEK, ETFE, polyurethane, etc.)

\* Patent No. 6,575,501




<b>Flangeless fittings with CTFE ferrules</b> (pkg/5)	<b>1/16" OD</b> Prod No	<b>1/8" OD</b> Prod No
Black	CFL-1BK	CFL-2BK
Blue	CFL-1BE	CFL-2BE
Brown	CFL-1BR	CFL-2BR
Dark gray	CFL-1DG	CFL-2DG
Green	CFL-1G	CFL-2G
Lavender/pink	CFL-1L	CFL-2L
Natural	CFL-1N	CFL-2N
Orange	CFL-1E	CFL-2E
Purple	CFL-1P	CFL-2P
Red	CFL-1R	CFL-2R
White	CFL-1W	CFL-2W
Yellow	CFL-1Y	CFL-2Y

<b>Assorted flangeless fittings</b> (pkg/12, one of each color)		
with CTFE ferrule	CFL-1A	CFL-2A
with PEEK ferrule	CFL-1A-PK	CFL-2A-PK

<b>Replacements</b>		
PEEK ferrules (pkg/10)	CFL-CB1PK	CFL-CB2PK
CTFE ferrules (pkg/10)	CFL-CB1KF	CFL-CB2KF
PEEK nuts (pkg/5)	CFL-1PK	CFL-2PK

<b>Setting tool</b>	CST	CST
---------------------	-----	-----

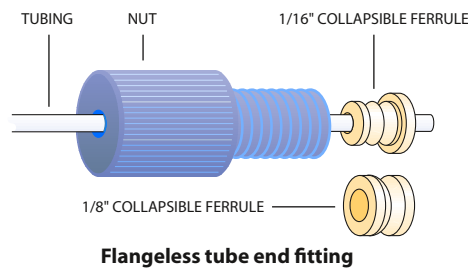

**CONVERSIONS**

0.25 mm	= .010"
0.50 mm	= .020"
0.75 mm	= .030"
1.0 mm	= .040"
1.5 mm	= .060"
2.0 mm	= .080"
4.6 mm	= .180"
6.0 mm	= .236"
6.4 mm	= .253"
7.0 mm	= .275"
10.0 mm	= .400"
27.0 mm	= 1.08"
1/32"	= 0.8 mm
1/16"	= 1.6 mm
1/8"	= 3.2 mm
1/4"	= 6.4 mm
3/8"	= 9.5 mm
1/2"	= 12.7 mm

**CHEMINERT FITTINGS**

**Standard flanged tube end fittings**


1/4-28



The basic component of the Cheminert system is the polypropylene nut, retained on PTFE or FEP tubing by a flange formed with a Cheminert flanging tool (page 70). This is an excellent method for connecting fluorocarbon tubing, as there is no reduction of the inside diameter and no binding or twisting of the tubing when the fitting is tightened. A mating of the parts is achieved with zero dead volume, making this an ideal fitting for biological systems.

Cheminert tube end fittings come in twelve different colors for system color coding, and are available for 1/16" or 1/8" OD fluorocarbon tubing. (While in theory other polymers could be molded to form a flange, only fluorocarbons such as PTFE, PFA, or FEP have low-temperature malleability and good form retention at operating temperatures.) Tube end fittings attach directly to Cheminert valves and fittings, and are easily joined to each other with a union. Tightening by hand is all that is required to make a leak-free seal at 500 psi liquid, although for long term reliability a wrench could be used to apply an additional 1/8 turn.

Packages include the same number of washers as fittings.

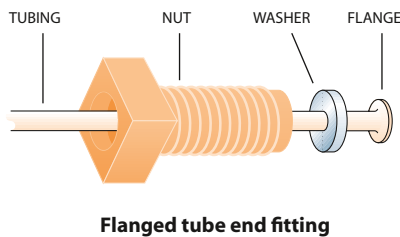

Flanged fittings (pkg/10)	1/16" OD Prod No	1/8" OD Prod No
Black	CF-1BK	CF-2BK
Blue	CF-1BE	CF-2BE
Brown	CF-1BR	CF-2BR
Dark gray	CF-1DG	CF-2DG
Green	CF-1G	CF-2G
Lavender/pink	CF-1L	CF-2L
Natural	CF-1N	CF-2N
Orange	CF-1E	CF-2E
Purple	CF-1P	CF-2P
Red	CF-1R	CF-2R
White	CF-1W	CF-2W
Yellow	CF-1Y	CF-2Y
Assorted flangeless fittings (pkg/12, one of each color)	CF-1A	CF-2A
Washers (pkg/10)	CF-W1	CF-W2


**TECH TIP**

To make up standard flanged tube end fittings, use the flanging tool on page 70.

A flanging starter kit, complete with flanging tool, flanging tips, and an array of tubing and fittings, is also available. (See page 70)

**TECH TIP**

Use our external nut tube end fittings to make true zero volume butt connections without a coupling.



**MORE INFORMATION**

High pressure fittings ..... pp 57-67  
PTFE and FEP tubing..... 92

**External nuts for flanged tube ends**

1/4-28

External nuts with female 1/4-28 threads are designed for use on tubing with a flanged end, just like the standard tube end fittings. Use them instead of a union or coupling to make a zero volume butt connection.

Package of 5:	PEEK Prod No	CTFE Prod No
Tubing OD		
1/16"	CEN1PK	CEN1KF
1/8"	CEN2PK	CEN2KF




**CHEMINERT FITTINGS**

**Cheminert flanging tools** (Non-CE)

The flanging tool makes the flange which retains the standard 1/4-28 tube end fitting and washer on PTFE or FEP tubing. With this tool, lengths of tubing may be easily assembled to any required dimension. The time required is approximately 5 to 10 seconds per flange.

Flanging tools are available for 110 VAC or 230 VAC, and come complete with tips for 0.75 mm, 1.0 mm, and 2.00 mm ID tubing, a tubing holder for gripping the tubing during the flanging operation, a razor blade for tube cutting, and instructions.



**Forming a tubing flange**



		<i>Prod No</i>
Flanging tools	110 VAC	CFT-110
	230 VAC	CFT-220
Flanging tool accessories		
Flanging tips		
for tubing ID ≤ 0.25 mm		CFT-TXC
≤ 0.75 mm		CFT-TC
≤ 1.00 mm		CFT-TM
≤ 1.50 mm		CFT-TL
≤ 2.00 mm		CFT-TXL
Razor blades (pkg/10)		CFT-R
Tubing holder		CFT-H

**Cheminert starter kits** (Non-CE)

Starter kits come in either 1/16" or 1/8" versions, with flanging tools for 110 VAC or 230 VAC.

	<b>110 VAC</b>	<b>230 VAC</b>
	<i>Prod No</i>	<i>Prod No</i>
Starter kits		
1/16" tubing	CFT1K-110	CFT1K-220
1/8" tubing	CFT2K-110	CFT2K-220

The starter kit includes:

- 1 flanging tool with 3 flanging tips
- 1 tubing holder
- 20 standard tube end fittings
- 20 stainless steel washers
- 10 couplings
- 20 feet of PTFE tubing
  - 1/16" OD x 0.030" ID or
  - 1/8" OD x .060" ID
- 1 male luer adapter
- 1 female luer adapter
- 1 plug
- 1 tee
- 1 glass connector



**MORE INFORMATION**

Standard tube end fittings ..... page 69

Stainless steel washers ..... 69

Couplings ..... 72-73

Male luer adapter ..... 76

Female luer adapter ... 76

Plug ..... 71

Tee ..... 74

Glass connector ..... 73





**Easy-Flange kit**

The Easy-Flange flange-rolling tool uses mechanical force to form a flange on 1/16" - 1/8" OD PTFE tubing, offering an excellent non-electric alternative to the heated flanging tool.

The quality of the flange is excellent, since it is formed without stressing the tubing by heat. The specially designed negative conical profile of the flange-forming component yields an ideal shape for maximum sealing properties.

- Prod No*
- Easy-Flange kit      JR-201540
- Includes:*
- Plastic box
  - Flanging discs with:
    - 0.5 mm SS pin for PEEK tubing
    - 0.8 mm polymer pin
    - 0.8 mm titanium pin
    - 1.3 mm polymer pin
    - 1.3 mm titanium pin
  - Clean-cut tubing cutter
  - 6 feet of PTFE tubing, 1/16" x 0.75 mm ID

**Plugs**

1/4-28 and 1/2-20

Plugs can be used to close off an unused port in a 1/4-28 valve or manifold.



	<b>PEEK</b>	<b>CTFE</b>	<b>Delrin</b>
	<i>Prod No</i>	<i>Prod No</i>	<i>Prod No</i>
<i>Pkg/5:</i>	1/4-28	CPPK	CPKF
<i>Pkg/1:</i>	1/2-20	—	CP-4K

**Low pressure PEEK plugs**

10-32

These all-PEEK plugs are for use in Cheminert PEEK fittings and low pressure polymeric valves (C20Z and C30Z series). For high pressure polymeric valves (C1-C5 series), use the plugs on page 64.

		<b>PEEK</b>
<i>Package of 1:</i>	<i>Length of nut*</i>	<i>Prod No</i>
1/16" hex	.62"	MZP1PK
1/16" long hex	.87"	LZP1PK
1/16" fingertight	.88"	ZP1FPK

**Caps**

1/4-28

Caps are used to close off lines with 1/4-28 tube end fittings.

	<b>PEEK</b>	<b>CTFE</b>
<i>Package of 5:</i>	<i>Prod No</i>	<i>Prod No</i>
	CCKP-5	CCKF-5



**MORE INFORMATION**

Clean-cut tubing cutter ..... page 92  
 Tightening tool for hex-head PEEK nuts... 67

**CONVERSIONS**

- 0.25 mm = .010"
- 0.50 mm = .020"
- 0.75 mm = .030"
- 1.0 mm = .040"
- 1.5 mm = .060"
- 2.0 mm = .080"
- 4.6 mm = .180"
- 6.0 mm = .236"
- 6.4 mm = .253"
- 7.0 mm = .275"
- 10.0 mm = .400"
- 27.0 mm = 1.08"
- 1/32" = 0.8 mm
- 1/16" = 1.6 mm
- 1/8" = 3.2 mm
- 1/4" = 6.4 mm
- 3/8" = 9.5 mm
- 1/2" = 12.7 mm

# Low pressure ■ Unions

## CHEMINERT FITTINGS

### Unions *Cheminert to Cheminert* 1/4-28 to 1/4-28

PEEK and CTFE unions include flangeless 1/4-28 fittings for tubing OD indicated. Polypropylene union bodies are for use with flanged tubing only and do not include any fittings.

Tubing		PEEK	CTFE
OD	Bore	Prod No	Prod No
1/16"	0.25 mm	CUCPK	CUCKF
1/16"	0.50 mm	CUPK	CUKF
1/16"	0.75 mm	CUMPK	CUMKF
1/8"	1.50 mm	CULPK	CULKF



Package/5:		Polypropylene
		Prod No
1/8"	Butt	CUTPP



### Unions *Cheminert to 1/16" ZDV* 1/4-28 to 10-32

Include flangeless 1/4-28 and ZDV 10-32 fittings for 1/16" tubing.

Tubing		PEEK	CTFE	316 Stainless
OD	Bore	Prod No	Prod No	Prod No
1/16"	0.25 mm	CZUCPK	CZUCKF	CZUS6
1/16"	0.50 mm	CZUPK	CZUKF	CZUS6
1/16"	0.75 mm	CZUMPK	CZUMKF	CZUS6



### Unions *Cheminert to 1/4" tubing* 1/4-28 to 1/2-20

Include flangeless 1/4-28 and 1/2-20 fittings.

Tubing		PEEK	CTFE
OD	Bore	Prod No	Prod No
1/8" to 1/4"	1.50 mm	CU4LPK	CU4LKF



Components	Prod No
1/2-20 nut, CTFE	CFL-4KF
1/2-20 nut, Delrin	CFL-4D
CTFE ferrule	CFL-CB4KF-S

#### CONVERSIONS

0.25 mm	= .010"
0.50 mm	= .020"
0.75 mm	= .030"
1.0 mm	= .040"
1.5 mm	= .060"
2.0 mm	= .080"
4.6 mm	= .180"
6.0 mm	= .236"
6.4 mm	= .253"
7.0 mm	= .275"
10.0 mm	= .400"
27.0 mm	= 1.08"
1/32"	= 0.8 mm
1/16"	= 1.6 mm
1/8"	= 3.2 mm
1/4"	= 6.4 mm
3/8"	= 9.5 mm
1/2"	= 12.7 mm

**CHEMINERT FITTINGS**

**Bulkhead unions** *Cheminert to Cheminert* *1/4-28 to 1/4-28*

Include flangeless 1/4-28 fittings for tubing OD indicated.

Tubing		PEEK	CTFE	316 Stainless
OD	Bore	Prod No	Prod No	Prod No
1/16"	0.25 mm	CBUCPK	CBUCKF	CBUCS6
1/16"	0.50 mm	CBUPK	CBUKF	CBUS6
1/16"	0.75 mm	CBUMPK	CBUMKF	CBUMS6
1/8"	1.50 mm	CBULPK	CBULKF	CBULS6



**Bulkhead unions** *Cheminert to 1/16" ZDV* *1/4-28 to 10-32*

Include flangeless 1/4-28 and ZDV 10-32 fittings for 1/16" OD tubing.

Tubing		PEEK	CTFE	316 Stainless
OD	Bore	Prod No	Prod No	Prod No
1/16"	0.25 mm	CZBUCPK	CZBUCKF	CZBUCS6
1/16"	0.50 mm	CZBUPK	CZBUKF	CZBUS6
1/16"	0.75 mm	CZBUMPK	CZBUMKF	CZBUMS6



**CHEMINERT FITTINGS**

**Tees**

1/4-28

Include flangeless 1/4-28 fittings for tubing OD indicated.

Tubing		PEEK	CTFE
OD	Bore	Prod No	Prod No
1/16"	0.25 mm	CTCPK	CTCKF
1/16"	0.50 mm	CTPK	CTKF
1/16"	0.75 mm	CTMPK	CTMKF
1/8"	1.50 mm	CTLPK	CTLKF



**Crosses**

1/4-28

Include flangeless 1/4-28 fittings for tubing OD indicated.

Tubing		PEEK	CTFE
OD	Bore	Prod No	Prod No
1/16"	0.25 mm	CXCPK	CXCKF
1/16"	0.50 mm	CXPK	CXKF
1/16"	0.75 mm	CXMPK	CXMKF
1/8"	1.50 mm	CXLPK	CXLKF



**Manifolds**

1/4-28

Include flangeless 1/4-28 fittings for tubing OD indicated.

Tubing		PEEK	CTFE
OD	Bore	Prod No	Prod No
<b>5 ports</b>			
1/16"	0.75 mm	C5M1PK	C5M1KF
1/8"	1.50 mm	C5M2PK	C5M2KF
<b>9 ports</b>			
1/16"	0.75 mm	C9M1PK	C9M1KF
1/8"	1.50 mm	C9M2PK	C9M2KF



**MORE INFORMATION**

Flangeless tube end fittings ..... page 68

**CONVERSIONS**

0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

**Mixing tees**

1/4-28



Include flangeless 1/4-28 fittings for tubing OD indicated.

Tubing		PEEK	CTFE
OD	Bore	Prod No	Prod No
1/16"	0.75 mm	CM1XPK	CM1XKF
1/8"	1.50 mm	CM2XPK	CM2XKF




**Glass connectors**

1/4-28 female to 1/4" glass tube

Glass connectors join a Cheminert tube end fitting to 1/4" OD glass tubing. Complete assemblies include a bushing and nut, a polypropylene or CTFE split ring, and a 1/4" OD x 3-1/4" long piece of 1 mm or 2 mm ID glass tube. This connector works only with our glass tubes.

Description	Acetal Prod No	CTFE Prod No
<b>Complete assembly</b>		
1 mm ID glass tubing	CGC41	CGC41KF
2 mm ID glass tubing	CGC42	CGC42KF
<b>Components</b>		
Bushing	CGCB	CGCBKF
Nut	CGCN	CGCNKF
Glass tube, 3-1/4" long		
1 mm ID	CGCG41	—
2 mm ID	CGCG42	—
Split rings (package of 5)	CGCR	CGCRKF

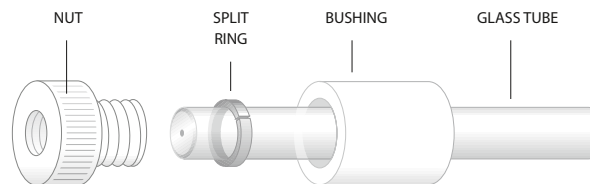

**Glass connector**

**CHEMINERT FITTINGS**

**Tube adapters**

1/4-28

Tube adapters have male 1/4-28 threads going to 1/4" or 1/8" OD tubing.

<i>Tubing</i>		<b>PEEK</b>	<b>CTFE</b>	<b>316 Stainless</b>
<i>OD</i>	<i>Bore</i>	<i>Prod No</i>	<i>Prod No</i>	<i>Prod No</i>
1/8"	1.5 mm	CTA2PK	CTA2KF	CTA2S6
1/4"	1.5 mm	CTA4PK	CTA4KF	CTA4S6



**Luer adapters**

Luer to 1/4-28 or 10-32

Luer adapters make a leak-tight connection from male or female luer to 1/4-28 threads.

<i>Description</i>	<i>Bore</i>	<b>PEEK</b>	<b>CTFE</b>	<b>PFA</b>
		<i>Prod No</i>	<i>Prod No</i>	<i>Prod No</i>
Female luer				
to 1/4-28 male	1.50 mm	CFLAPK	CFLAKF	CFLAPFA
to 10-32 female	0.75 mm	ZUFLPK	ZUFLKF	—
Male luer				
to 1/4-28 male	1.50 mm	CMLAPK	CMLAKF	CMLAPFA



**Luer adapter bulkhead unions**

Luer to 1/4-28 or 10-32

Our luer adapter bulkhead union connects a male or female luer to 1/4-28 or 10-32 fittings. These are the ideal fittings for through-the-panel syringe injections. The 1/4-28 versions include flangeless fittings for 1/16" OD tubing. Versions with 10-32 connections (for 1/16" OD tubing) include a fingertight PEEK nut and a ferrule of the same material as the union.

<i>Description</i>	<i>Bore</i>	<b>PEEK</b>	<b>CTFE</b>
		<i>Prod No</i>	<i>Prod No</i>
Female luer			
to 1/4-28	1.50 mm	CBUFLPK	CBUFLKF
to 10-32	1.00 mm	ZBUFLPK	ZBUFLKF
Male luer			
to 10-32	1.00 mm	ZBUMLPK	ZBUMLKF



**CHEMINERT FITTINGS**



**Pipe adapters**

1/4-28 to NPT

Versions adapt male or female 1/4-28 fittings to male or female NPT.

NPT	Bore	PEEK Prod No	CTFE Prod No
<b>Female 1/4-28 to male NPT</b>			
1/8"	1.5 mm	CPA2PK	CPA2KF
1/4"	1.5 mm	CPA4PK	CPA4KF
<b>Male 1/4-28 to male NPT</b>			
1/8"	1.5 mm	CEPA2PK	CEPA2KF
1/4"	1.5 mm	CEPA4PK	CEPA4KF
<b>Female 1/4-28 to female NPT</b>			
1/8"	1.5 mm	CFPA2PK	CFPA2KF
1/4"	1.5 mm	CFPA4PK	CFPA4KF



10-32 NUT NOT INCLUDED

**Cheminert 1/4-28 to Valco 10-32 ZDV adapter**


This adapter permits Valco 10-32 fittings to be installed into any 1/4-28 fitting detail. (Nut and ferrule are not included.)

Description	Bore	Prod No
Port adapter	0.50 mm	ZLCA1PK

**One-piece fingertight column coupler**

Choose from a variety of coupler IDs, indicated by the color of the sleeve (which parallels the color-coding of our PEEK tubing on page 91). A unique feature of this column coupler is that it adapts automatically to fit all pilot lengths – Valco, Waters, Upchurch, Rheodyne, etc. Since the tubing bottoms out in any fitting detail, added void volume is minimal. Material is PEEK.

Color	Bore	Prod No
Red	0.13 mm ID	JR-26501
Yellow	0.17 mm ID	JR-26502
Blue	0.25 mm ID	JR-26503
Orange	0.50 mm ID	JR-26504

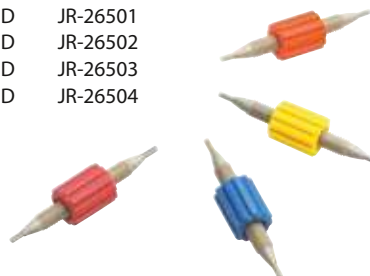

**CONVERSIONS**

0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

## CHEMINERT FITTINGS

### Perifit fittings for peristaltic pump tubing

The Cheminert Perifit is a unique fitting with a barb on one end and a 1/4-28 female fitting on the other end, for connecting a FIA line with the most commonly used peristaltic tubing. The fitting is compact and easy to install while providing a secure, trouble-free connection. A Perifit can be used as a "stop" on standard inexpensive Tygon® tubing, eliminating the need to buy the more expensive pre-cut tubing with pre-installed stops. Unlike many competitive systems, Perifits are reusable as the tubing wears.

Three sizes of Perifits are available to cover the range of tubing most commonly used in FIA.



<i>For use with tubing sizes</i>	<i>Prod No</i>
0.50 to 1.02 mm ID	C-PFS
1.12 to 1.65 mm ID	C-PFM
1.85 to 2.29 mm ID	C-PFL
Kit with 2 of each size above	C-PF

### In-line filters

1/4-28

These convenient filters can be simply dropped into any 1/4-28 fitting detail. Constructed of PTFE and CTFE, with a 316 stainless low-pressure-drop screen. (Fitting shown is not included.)

<i>Pore size</i>	<i>Prod No</i>
2 micron	CFE-S2
10 micron	CFE-S10
75 micron	CFE-S75



### Biocompatible filter

This all-PEEK filter can be placed in any 1/16" line, providing filtration to 0.5 microns. The filter can be changed without tools, since both the filter housing and the fittings are designed to be tightened by hand.

<i>Tubing OD</i>	<i>Bore</i>	<i>Prod No</i>
1/16"	0.5 mm	ZU1FPK.5



### Replacement elements (PEEK-encapsulated titanium)

<i>Pore size</i>	<i>Prod No</i>
0.5 micron	C-F1.5T1

### CONVERSIONS

0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm



**Last Drop mobile phase filter**



The Last Drop mobile phase filter allows more analyses per batch of mobile phase and helps reduce hazardous waste. The flat filter element sits parallel to the bottom of the reservoir, allowing the Last Drop to filter all but the last 2% of the mobile phase from the reservoir without drawing air into the system. Compare this with conventional cylindrical filters that can begin to draw air into the system when nearly 10% of the solvent remains in the reservoir.

The Last Drop mobile phase filter consists of a 316 stainless or PTFE filter element pressed into an inert PTFE housing. The top of the housing has a PEEK tripod which slips into 1.5, 2.2, or 3.5 mm ID pump inlet lines. It will also work with our 1/16" and 1/8" flangeless fittings.

Use the metal-free PTFE version for sensitive biochromatography applications in which metal surfaces may corrode or interact with samples.

	<i>Filter element</i>	<i>Prod No</i>
Last Drop filter, 2.5µm	PTFE	JR-9000-0520
	Stainless steel	JR-9000-0530

**Last Drop filter/spargers**



The Last Drop filter/sparger combines filtration and sparging in a single unit. The PTFE housing contains a mobile phase filter with either a stainless steel or a PTFE filter element. The filter/sparger features a PEEK tripod connector for the solvent line, and a nut and ferrule for the sparging line.

	<i>Filter element</i>	<i>Prod No</i>
Last Drop filter/sparger 2.5 µm filter, 10 µm sparger	PTFE	JR-9000-0602
	Stainless steel	JR-9000-0640

**Mobile phase filters**

*Direct connect*



Cheminert mobile phase filters provide point-of-use filtering of common HPLC or FIA solvents. They are designed to connect directly to 1/8" OD PTFE or PEEK tubing using a simple press fit. The filter housing is PTFE and includes a 2 or 10 micron titanium frit.

<i>Pore size</i>	<i>Prod No</i>
2 micron	C-MPFT12
10 micron	C-MPFT110

**CHEMINERT FITTINGS**

**No-Met biocompatible mobile phase filter**

In the growing number of applications involving the separation of biomolecules, stainless steel in the flowpath is not acceptable. High salt buffers can corrode stainless steel, and the metal ions released from metallic filters may contaminate or otherwise react with the biomolecules of interest.

The No-Met polyethylene filter is designed for these applications, with inert polymeric fittings and 20 µm filter effectively eliminating metal contamination from the fluid path. Use them for IC and biochromatography applications.

Because they are hydrophobic, No-Met filters may initially require some priming with methanol or acetonitrile. They can be used up to a maximum flow rate of 500 ml/min\*.



*Prod No*

No-Met mobile phase filter, 1/8"      JR-32178  
 Replacement element                JR-32179

\* Flow rates measured with methanol/water (1:1), ultrasonically degassed.  
 Flow rates can vary with solvent and tubing ID.

**Stainless steel mobile phase filters and helium spargers**

Mobile phase filters protect your HPLC system from small particles in the mobile phase. These filters are made from 316 stainless and PEEK or PTFE, and are suitable for use with most solvents.

Helium spargers offer an inexpensive way to prepare and maintain mobile phases free of dissolved gases. Connect these spargers to a regulated supply of helium gas (0 - 400 ml/min) to remove dissolved gases from the mobile phase. Spargers are made from 10 micron porosity stainless steel.



<i>Tubing OD</i>	<i>Porosity</i>	<i>Suggested Max. Flow Rate (ml/min)*</i>	<i>Prod No</i>
1/16"	2 µm	35	JR-367016-2
1/16"	10 µm	35	JR-367016-10
1/16"	20 µm	35	JR-367016-20
1/8"	2 µm	35	JR-367008-2
1/8"	10 µm	100	JR-367008-10
1/8"	20 µm	120	JR-367008-20

\* Flow rates measured with methanol/water (1:1), ultrasonically degassed.  
 Flow rates can vary with solvent and tubing ID.

**CONVERSIONS**

0.25 mm = .010"
0.50 mm = .020"
0.75 mm = .030"
1.0 mm = .040"
1.5 mm = .060"
2.0 mm = .080"
4.6 mm = .180"
6.0 mm = .236"
6.4 mm = .253"
7.0 mm = .275"
10.0 mm = .400"
27.0 mm = 1.08"
1/32" = 0.8 mm
1/16" = 1.6 mm
1/8" = 3.2 mm
1/4" = 6.4 mm
3/8" = 9.5 mm
1/2" = 12.7 mm



### Mobile phase or solvent reservoirs 1/4-28

These high density polyethylene reservoirs for in-line solvent use come with polypropylene caps, 1/4-28 flangeless fittings, and 1/8" PTFE tubes for one or two lines plus vent. Plugs are included for conversion to solvent storage when the reservoir is removed from the system. Optional PTFE filters with titanium frits are available at the bottom of page 79.

Capacity	Cap	Prod No
0.5 liter	2-hole	C-MPR2
0.5 liter	3-hole	C-MPR3
0.5 liter	plain	C-BOT16
1.0 liter	plain	C-BOT32

### VICI caps

The VICI cap is the most economical way to helium sparge and deliver HPLC mobile phases. The insert is manufactured from PTFE, with a polypropylene screw cap and an EPDM\* O-ring which is resistant to commonly used HPLC solvents.

VICI caps fit GL45 threaded bottles, and are available with 2, 3, or 4 ports with 1/4-28 threads for 1/8" or 1/16" tubing. Unused ports can be plugged as required.

Each VICI cap includes the cap with insert and o-ring, and the appropriate number of PPS nuts, ETFE ferrules, and colored polypropylene fingertight sleeves for solvent line identification.

\*Ethylene Propylene Diene Monomer

		Prod No
VICI-cap	2 ports	JR-S-11001
	3 ports	JR-S-11002
	4 ports	JR-S-11003



### Valves for vials

Screw-cap Mininert valves are available in a variety of sizes. The crimp-top valve for 13 mm ID glassware slides into the neck of the vial and features a threaded flange, which is turned to provide a leak-tight fit.

Pkg/12:	Cap/thread size	Prod No
	13 mm-425	PS-614158
	15 mm-425	PS-614160
	18 mm-400	PS-614161
	20 mm-400	PS-614170
	24 mm-400	PS-614163
	Crimp top	PS-614250



#### TECH TIP

The VICI cap is intended only for continuous helium sparging, not for building up a helium atmosphere within the solvent bottle.

#### MORE INFORMATION

Bulkhead  
connectors . . . . . page 73  
Flangeless fittings . . . . . 68  
Plugs . . . . . 71  
Polymeric  
tubing . . . . . 90-92

# Liquid handling

## PUMPS AND ULTRA-HIGH PRESSURE VALVES

### Diluter/dispensers, M series (Non-CE)

- Full liquid handling functionality
- Self-priming
- No syringes
- Largest volume range available
- Easy to use Wizard format does away with math problems and charts



Cheminert M Series diluter/dispensers simplify the sample preparation process for dispensing and diluting liquids. A user-friendly Wizard format eliminates all the math calculations and charts usually associated with diluting and dispensing applications. Just enter the dilution ratio and the final volume, and the correct volume is calculated and automatically dispensed for each ratio.

For multiple dispenses, simply enter the volume and the number of dispense repetitions, and the Wizard calculates the total volume to be aspirated. It's that easy!

The diluter/dispenser is built around a patented syringe-free, bi-directional, positive displacement pump. This design approach gives the largest volume range available, and eliminates the inconvenience of having to change and refill syringes.

#### M10 Diluter/Dispensers

	<i>Prod No</i>
10 nl - 10 ml - M10 diluter/dispenser	CD10-4841-M1A

#### M50 Diluter/Dispensers

	<i>Prod No</i>
50 µl - 50 ml - M50 diluter/dispenser	CD50-8182-M2A

#### Additional Features

##### "Smart" hand probe

The hand probe signals the operator when an aspirate or dispense step is completed. The unique design also allows the use of fixed or disposable probe tips, as well as other accessories.

##### Program memory

Up to 100 programs can be permanently stored.

##### Multi-solvent option

A multiposition stream selection valve can be easily integrated with the pump for multi-solvent applications.

##### Printer option

Print out methods, sequential steps, time/date/operator stamp, titration, and tubing volume values.

#### Applications

- Simple dispensing of reagents using the manual dispense mode
- Micro dispensing in microplates and genomic arrays
- Dilutions for AA, ICP, GC, and HPLC samples
- Serial dilutions for all samples
- Multi-sample and reagent additions, micro-plates, tube to plate, tube to tube
- Small and large volume dispensing of reagents
- Titrations

## Liquid handling pumps, M series

CE

The Cheminert® M Series liquid handling pump is a syringe-free pump capable of delivering a bidirectional flow over six orders of magnitude.

The M Series is a positive displacement pump, which means that it is self-priming and tolerant of any gas which may find its way into the fluid lines. There is no separate fill cycle, and the capacity is unlimited.

RS-232 and RS-485 communication protocols are incorporated into the microprocessor-driven controller. (USB interface requires an adapter.) The included software package controls flow rates, flow direction, and metered volumes.

### Operating principle

At the core of the pump is a polymeric rotor housing four 1/8" diameter pistons in sapphire cylinders. As the microstepper motor turns the rotor, the pistons float on a stationary cam; at any given moment, one piston is filling, one is dispensing, and the other two are in transit between the fill and dispense positions.



### SPECS

	M6	M50
Continuous minimum dispense	100 nl	50 $\mu$ l
Continuous maximum dispense	5 ml/min	25 ml/min
Maximum back pressure	100 psi	100 psi
Gravimetric precision		
for 125 $\mu$ l	0.5%	0.8%
for 1.25 ml	0.05%	0.1%
Pump internal volume ( $\mu$ l)	100 $\pm$ 2 $\mu$ l	625 $\pm$ 10 $\mu$ l

### Applications

- Flow cytometry, cell and drug perfusion
- HTS and robotic systems
- Infusion and micro-dialysis
- Micro diluters/dispensers for nl to ml range applications
- Micro liquid transfers (nl) for micro arrays
- Microtiter plate dispensing using multiposition valves

#### TECH TIP

Use a standoff assembly if the motor must be separated from the pump head. Standoffs are available in lengths of 2", 3", 4", and 6".

### M6 pumps

10 nl - 10 ml

	Prod No
M6 pump with:	
Controller and stepper motor	CP2-4841-100M1
Stepper motor (no controller)	CP2-4841-100SM
M6 pump only	CP2-4841-100D

### M50 pumps

50  $\mu$ l - 50 ml

	Prod No
M50 pump with:	
Controller and stepper motor	CP3-8182-625M2
Stepper motor (no controller)	CP3-8182-625SM2
M50 pump only	CP3-8182-625D

### Accessories and replacement parts

	Prod No
Pump motor	
M6	CP-DSM
M50	CP-DSM2
Controller, MicroLynx-4	CP-CM1-P
Standoff assembly *	
2"	2SOAMP
3"	3SOAMP
4"	4SOAMP
6"	6SOAMP

\* Note: Adding a standoff will change the backlash. Consult factory for further information.

# Ultra-high pressure injector system

## LIQUID HANDLING

### 40,000 psi ultra-high pressure injector system

The VICI 40K injector is comprised of six miniature air actuated needle valves, plumbed to simulate the flow path of a conventional rotor/stator injector. An integral controller sends the on/off positioning signals to each valve, coordinating them to perform load, inject, and flush functions.

There are three methods for sending positioning commands to the injector:

- Manual control with the pushbuttons on the controller
- Laboratory computer via serial port communication
- Contact closure inputs

For more information, contact our technical department.




### Ultra-high pressure injector system

for liquids

Prod No

SPSS40

#### Ultra-high pressure injector system schematic

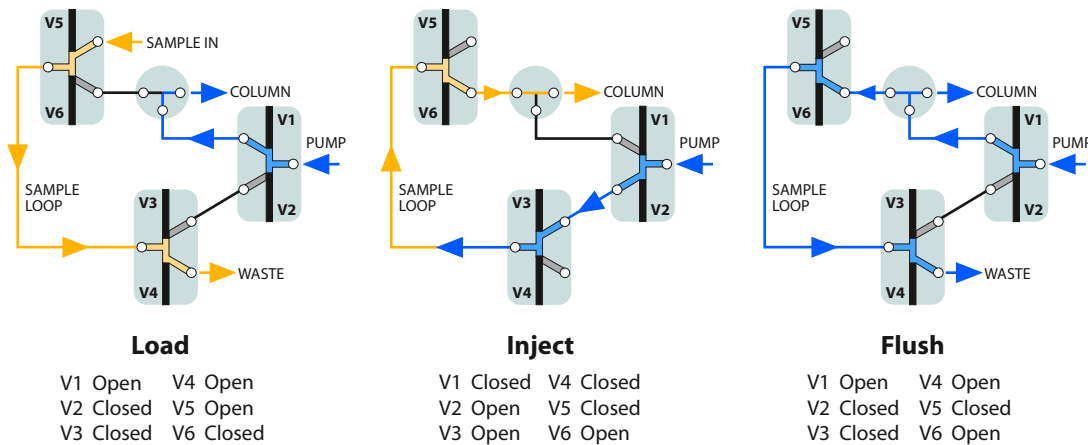

## 40,000 psi ultra-high pressure valves

The ultra-high pressure valves that are the heart of our SPSS40 (*previous page*) are now available individually, in 1/16", 1/32", and 360 micron versions. There are three types – a two port on/off valve, a dual on/off valve, and a 3-way prime/purge valve. (*See page 213 for flowpath schematics.*) The dual on/off configuration has two individually controlled outlets with a common inlet (or vice versa), emulating a rotary three way valve.

Implementation requires a single three-way solenoid: application of 50 psi opens the valve; venting the air allows the spring to return the valve to the closed position. A fitting for 1/8" air supply tubing is included; two fittings are included for dual valves. (*Fitting: prod no EAOR21, page 219*)



**On/off valve**  
360 µm ZDV fittings

### On/off valves

for liquids

SPECS		Fitting size	Bore	Prod No
Temp	Pressure			
50°C	40,000 psi liq	360 µm	0.15 mm	ASFVO40K360
		1/32"	0.15 mm	ASFVO40K.5
		1/16"	0.15 mm	ASFVO40K1



**Prime/purge valve**  
360 µm ZDV fittings

### Prime/purge valves


for liquids

SPECS		Fitting size	Bore	Prod No
Temp	Pressure			
50°C	40,000 psi liq	360 µm	0.15 mm	ASFV40K360
		1/32"	0.15 mm	ASFV40K.5
		1/16"	0.15 mm	ASFV40K1


### Dual on/off valves

for liquids

SPECS		Fitting size	Bore	Prod No
Temp	Pressure			
50°C	40,000 psi liq	360 µm	0.15 mm	ASFVOD40K360
		1/32"	0.15 mm	ASFVOD40K.5
		1/16"	0.15 mm	ASFVOD40K1

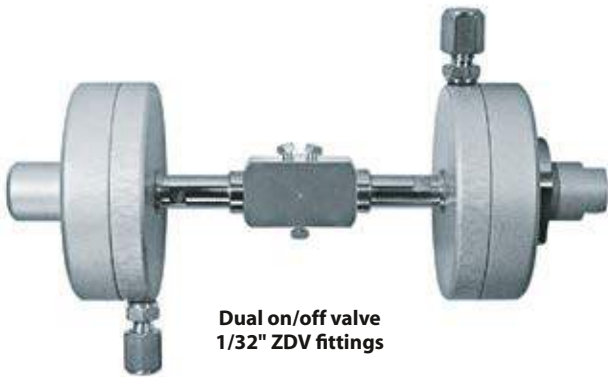

**Dual on/off valve**  
1/32" ZDV fittings

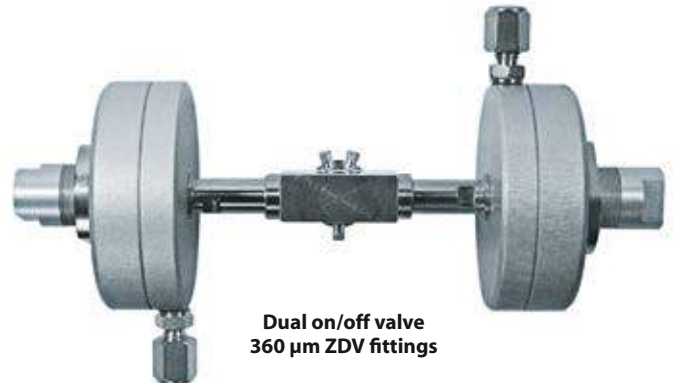

**Dual on/off valve**  
360 µm ZDV fittings

### STANDARD ON/OFF AND PRIME/PURGE VALVES

2,000 psi to 10,000 psi valves . . . . . pp 212-213



### TECH TIP

Three dual on/off valves comprise the ultra-high pressure injector system, SPSS40, on the facing page.

# Tubing

## METAL AND POLYMERIC

We offer chromatography grade tubing in ODs of 360  $\mu\text{m}$ , 1/32", 1/16", and 1/8". Tubing can be ordered in economical pre-cut standard lengths, or can be custom cut to meet your specific instrumentation requirements. All VICI metal tubing is chromatographic grade seamless drawn tubing of the highest available quality. Stainless tubing is 316 series.

### Cutting and Cleaning

The improper cutting and cleaning of metal tubing is the largest single cause of chromatographic problems and premature valve failure. The use of our precision cut and finished tubing with VICI fittings and valves maintains the flow uniformity and cleanliness that high performance systems require.

VICI's electrolytic cutting process yields polished tubing with flat ends, minimizing the potential for dead volumes or leaks caused by the uneven ends and burrs left by the tools common in the general laboratory environment – wire cutters, files, jewelers' saws, and most

tubing cutters. These non-precision cutters are likely to generate particulates and deform inner and outer diameters, which can introduce dead volume and flow anomalies.

Each piece of VICI pre-cut metal tubing is specially cleaned with micro-filtered steam from deionized water to remove both organic and inorganic contaminants, representing a major improvement over the common practice of using organic solvents to "clean" tubing. Our test reports have been confirmed by most of the major instrument suppliers: the VICI process provides analytically clean tubing.



Electrolytically cut and polished



File cut



Plier cut

#### TECH TIP

Forty years of Valco experience show that the particles left in poorly cut tubing are the number one cause of valve damage.

#### TECH TIP

For optimal zero dead volume connections, make sure your tubing meets the best industry standards—OD tolerance should be nominal dimension  $\pm .002$ ".

Fractional dimension	Nominal dimension
1/32"	.031
1/16"	.062
1/8"	.125
1/4"	.250
3/8"	.375
1/2"	.500





1/16" OD x .040" ID  
1/32" OD x .004" ID  
360 μm OD x .001" ID

Three sizes of electroformed nickel tubing

## Electroformed nickel tubing

Our microbore EFNi tubing is made by electroplating nickel over a diamond-drawn mandrel in a continuous process. When the mandrel is removed, an internal surface with a mirror-like 1-2 microinch finish remains. The ductile nature of nickel allows the tubing to be easily manipulated. Unlike glass- or silica-lined stainless, EFNi can accept tight bends and cutting without heating, and does not release damaging glass fragments or silica particles.

A comparison of the interiors of commonly used tubing (below) shows the quality of the electroformed nickel tubing surface. (All photos are x500 magnification.) The rough interior surface of the mill-drawn Nickel 200 tubing has potential for carryover or cross contamination, and both the Nickel 200 and the stainless steel contain pits, voids, striations, and particles – problems which intensify as the ID decreases.


Custom IDs/ODs are available upon request.



Electroformed nickel (EFNi)



Nickel 200 alloy



Type 316 stainless steel

### PRICING PER FOOT

For pricing purposes, the length is rounded up to the next foot. For example, a 5" piece is charged as one foot; an 18" piece as two feet. The price per foot is based on the length of each piece, not the total quantity ordered. Cutting and cleaning charges are included in the price per foot for EFNi tubing.

### CONVERSIONS

- 0.05 mm = .002"
- 0.10 mm = .004"
- 0.12 mm = .005"
- 0.25 mm = .010"
- 0.50 mm = .020"
- 0.75 mm = .030"
- 1.0 mm = .040"
- 1.5 mm = .060"
- 2.0 mm = .080"
- 4.6 mm = .180"
- 6.0 mm = .236"
- 6.4 mm = .253"
- 7.0 mm = .275"
- 10.0 mm = .400"
- 27.0 mm = 1.08"
- 1/32" = 0.8 mm
- 1/16" = 1.6 mm
- 1/8" = 3.2 mm
- 1/4" = 6.4 mm
- 3/8" = 9.5 mm
- 1/2" = 12.7 mm

### 360 μm OD EFNi tubing

Custom lengths

Prices are per foot. See pricing note in box at left.

Tubing ID	Prod No	Max length
.001"	TEFNI.101	1 foot
.002"	TEFNI.102	2 feet
.004"	TEFNI.104	20 feet
.005"	TEFNI.105	30 feet
.007"	TEFNI.110	50 feet

### 1/32" OD EFNi tubing

Custom lengths

Prices are per foot. See pricing note in box at left.

Tubing ID	Prod No	Max length
.002"	TEFNI.502	2 feet
.004"	TEFNI.504	20 feet
.005"	TEFNI.505	30 feet
.007"	TEFNI.507	50 feet
.010"	TEFNI.510	50 feet
.012"	TEFNI.512	50 feet
.015"	TEFNI.515	50 feet
.020"	TEFNI.520	50 feet

### 1/16" OD EFNi tubing

Custom lengths

Prices are per foot. See pricing note in box at left.

Tubing ID	Prod No	Max length
.020"	TEFNI120	25 feet
.030"	TEFNI130	35 feet
.040"	TEFNI140	50 feet

VICI electrochemically plates PEEK and fused silica tubing with pure nickel. This strengthens the tubing and allows direct connections using metal ferrules while maintaining the chemical benefits of the wetted surfaces inside.



### Nickel-clad fused silica

- Inert, flexible transfer lines
- Improved heat transfer
- Thick wall version allows direct connection using metal ferrules
- Rated for up to 40,000 psi (dependant on size and plating thickness)

We take polyimide-coated fused silica (FS) and remove the polyimide layer. Then we electrochemically plate the FS with pure nickel. The resulting nickel-plated FS tube provides superior heat transfer to the FS lining, permitting use as a flexible transfer line with the best qualities of silica-lined stainless but with improved heat transfer and a shorter bend radius.

For high pressure applications, we recommend using our 1/32" 316 stainless ferrules.

1/32" OD tubing is available in IDs from 10 to 250 µm, permitting use of metal ferrules for improved leak-tight connections.

#### **800µm (1/32") OD nickel-clad fused silica** *Custom lengths*

<i>Tubing ID</i>	<i>Prod No</i>
10 µm	TNFS800360010
15 µm	TNFS800360015
20 µm	TNFS800360020
25 µm	TNFS800360025
50 µm	TNFS800360050
100 µm	TNFS800360100
180 µm	TNFS800360180
250 µm	TNFS800360250



### Nickel-clad polyimide-coated fused silica

- Thin wall version for resistive heating offers improved heat transfer as compared to wire-wrapped designs
- Thin wall version results in column packages with even less mass, critical when temperature measurement is based on the change in resistance

Any polyimide-coated FS can be electroplated with pure nickel. This results in a ruggedized traditional FS column (or transfer line with deactivated FS), which can be resistively heated, if desired. Temperature is measured using the resistance of the nickel, removing any need for external sensors. A thin-wall, low mass version optimized for resistive heat applications is available in eight different diameters. We offer several options for tubing connections.

Please contact the factory to discuss your application.

#### **TECH TIP**

For best results, order clad tubings in the precise length required. Clean cuts are difficult to achieve with the tools normally available.

#### **PRICING PER FOOT**

For pricing purposes, the length is rounded up to the next foot. For example, a 5" piece is charged as one foot; an 18" piece as two feet. The price per foot is based on the length of each piece, not the total quantity ordered. Cutting and cleaning charges are included in the price per foot for TNF tubing.



## Nickel-clad PEEK

- Permits use of PEEK tubing at 30,000 psi
- Direct connection with metal ferrules

Since we can manufacture virtually any size of PEEK tubing from 360  $\mu\text{m}$  OD/ .002" ID on up, the possibilities are endless. In any size, the mechanical properties of nickel combined with the chemical properties of PEEK produce enhanced performance with robust metal ferrule connections.

### **NEW** Nickel-clad PEEK

*Custom lengths*

<b>Tubing OD:</b> <i>Tubing ID</i>	<b>800 <math>\mu\text{m}</math> (1/32")</b> <i>Prod No</i>	<b>1600 <math>\mu\text{m}</math> (1/16")</b> <i>Prod No</i>
50 $\mu\text{m}$	TNPK800360050	TNPK16001140050
75 $\mu\text{m}$	TNPK800360075	TNPK16001140075
100 $\mu\text{m}$	TNPK800360100	TNPK16001140100
125 $\mu\text{m}$	TNPK800360125	TNPK16001140125
180 $\mu\text{m}$	TNPK800360180	TNPK16001140180
205 $\mu\text{m}$	TNPK800360205	—
250 $\mu\text{m}$	TNPK800404250	TNPK16001140250
305 $\mu\text{m}$	TNPK800510305	TNPK16001140305
380 $\mu\text{m}$	TNPK800535380	—
510 $\mu\text{m}$	TNPK800660510	TNPK16001140510
760 $\mu\text{m}$	—	TNPK16001140760
1015 $\mu\text{m}$	—	TNPK160011401015

### CONVERSIONS

50 $\mu\text{m}$	=	.002"
75 $\mu\text{m}$	=	.003"
100 $\mu\text{m}$	=	.004"
125 $\mu\text{m}$	=	.005"
150 $\mu\text{m}$	=	.006"
180 $\mu\text{m}$	=	.007"
205 $\mu\text{m}$	=	.008"
250 $\mu\text{m}$	=	.010"
305 $\mu\text{m}$	=	.012"
380 $\mu\text{m}$	=	.015"
510 $\mu\text{m}$	=	.020"
760 $\mu\text{m}$	=	.030"
1015 $\mu\text{m}$	=	.040"
800 $\mu\text{m}$	=	1/32"
1600 $\mu\text{m}$	=	1/16"

**TUBING**

## Natural PEEK tubing

PEEK tubing has the strength required to withstand continuous use at HPLC pressure without swelling or bursting, and is not affected by halide salts, high strength buffers, or other aggressive mobile phases that corrode stainless steel. The polymer surface will not leach metal ions into the eluent or extract metal-sensitive components from the sample. Note, however, that dichloromethane, THF, and DMSO may cause swelling in PEEK, and concentrated nitric and sulphuric acid will attack PEEK.



OD and ID tolerances for our PEEK tubing are  $\pm .0005''$  for 360 micron and 1/32" tubing;  $\pm .0005''$  for 1/16" tubing with ID up to .010" and  $\pm .001''$  for IDs above .010"; and  $\pm .003''$  for 1/8".

### 360 $\mu$ m PEEK tubing

*Custom lengths*

Custom-length 360  $\mu$ m PEEK tubing is square-cut and ready to use. Specify the length required, in meters

	<b>.002" ID</b> <i>Prod No</i>	<b>.004" ID</b> <i>Prod No</i>	<b>.005" ID</b> <i>Prod No</i>	<b>.006" ID</b> <i>Prod No</i>
Priced per meter	TPK.102	TPK.104	TPK.105	TPK.106

### 1/32" OD PEEK tubing

<i>Length</i>	<b>.0025" ID</b> <i>Prod No</i>	<b>.005" ID</b> <i>Prod No</i>	<b>.010" ID</b> <i>Prod No</i>	<b>.015" ID</b> <i>Prod No</i>
5 meters	TPK.502-5M	TPK.505-5M	TPK.510-5M	TPK.515-5M
10 meters	TPK.502-10M	TPK.505-10M	TPK.510-10M	TPK.515-10M
25 meters	TPK.502-25M	TPK.505-25M	TPK.510-25M	TPK.515-25M

### 1/16" OD PEEK tubing

<i>Length</i>	<b>.006" ID</b> <i>Prod No</i>	<b>.010" ID</b> <i>Prod No</i>	<b>.020" ID</b> <i>Prod No</i>	<b>.030" ID</b> <i>Prod No</i>
5 meters	TPK106-5M	TPK110-5M	TPK120-5M	TPK130-5M
10 meters	TPK106-10M	TPK110-10M	TPK120-10M	TPK130-10M
25 meters	TPK106-25M	TPK110-25M	TPK120-25M	TPK130-25M

### 1/8" OD PEEK tubing

<i>Length</i>	<b>.060" ID</b> <i>Prod No</i>
5 meters	TPK260-5M
10 meters	TPK260-10M
25 meters	TPK260-25M

#### PEEK TUBING ELBOWS

Tubing elbows (90° and 180°) are ideal for routing 1/16" PEEK tubing through an LC system. These elbows are proportioned to bend PEEK tubing at the optimum radius for maximum chemical resistance and burst pressure. Installation is simple – just snap the tubing into the elbow.

<i>Package of 5:</i>	<i>Prod No</i>
90° elbow	JR-357090-5
180° elbow	JR-357180-5



#### MORE INFORMATION

Polymeric tubing	
PTFE .....	page 92
FEP .....	92
ETFE .....	92

#### CUSTOM PEEK TUBING

We offer PEEK tubing custom-manufactured to meet your specific OD, ID, and color requirements. The OD range is .014" (360 micron) to 1/8", with a minimum ID of .002" for tubing up to 1/16" OD. (Maximum ID varies according to the OD.) Color coding can be solid or striped.



## Color-coded PEEK tubing

Color-coded tubing helps you identify the ID of your PEEK tubing – each ID is coded with a different color. Use this tubing where maximum chemical resistance and biocompatibility are required.

### 1/16" OD dual layer color-coded PEEK tubing

Custom lengths

Our dual layer PEEK tubing eliminates any concern that a critical sample stream could be contaminated by the pigments used to color code the tubing.\* It looks like any other color-coded tubing at first glance, but a closer look reveals that the pigmented layer surrounds a separate but integrally-bonded inner layer of natural PEEK.

Tube ID	Color	bar	psi	Prod No
.004"	Black	460	6700	JR-TD-5804
.005"	Red	420	6100	JR-TD-6007
.007"	Yellow	400	5800	JR-TD-6008
.010"	Blue	386	5600	JR-TD-6009
.020"	Orange	350	4500	JR-TD-6010
.030"	Green	240	3500	JR-TD-6011



### 1/16" OD striped color-coded PEEK tubing

Custom lengths

A stripe is added to the outside, so dye never contacts the fluid stream.\*

Specify the length required, in inches or feet. For pricing custom tubing, the length is rounded up to the next foot. For example, a 5" piece is charged as one foot; an 18" piece as two feet.

Tube ID	Color	bar	psi	Prod No
.004"	Black	460	6700	JR-T-5804
.005"	Red	420	6100	JR-T-5999
.007"	Yellow	400	5800	JR-T-6000
.010"	Blue	386	5600	JR-T-6001
.020"	Orange	350	4500	JR-T-6002
.030"	Green	240	3500	JR-T-6003
.040"	Grey	165	2400	JR-T-60031

### 1/16" OD striped color-coded PEEK tubing


Pre-cut kits

A stripe is added to the outside, so dye never contacts the fluid stream.\*

Includes 15 pieces of tubing; 5 each of 5 cm, 10 cm, and 20 cm pre-cut lengths.

Tube ID	Color	bar	psi	Prod No
.005"	Red	420	6100	JR-T-98013
.007"	Yellow	400	5800	JR-T-98017
.010"	Blue	386	5600	JR-T-98025
.020"	Orange	350	4500	JR-T-98050
.030"	Green	240	3500	JR-T-98075

Super kit, one of each above product number  
(75 pieces total)

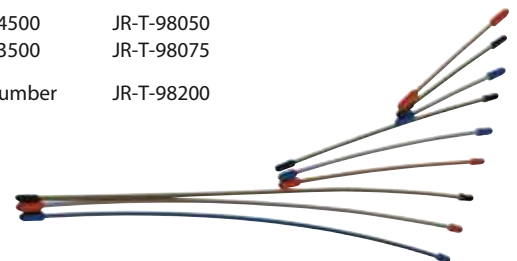

#### CONVERSIONS

10 ft	=	3.05 m
25 ft	=	7.62 m
100 ft	=	30.48 m
50 µm	=	.002"
100 µm	=	.004"
125 µm	=	.005"
150 µm	=	.006"
0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

\*All colorants used in the manufacture of this tubing are RoHS-compliant (Restriction of Hazardous Substances)

# Polymeric tubing

## TUBING

### PTFE, FEP, and ETFE tubing

Polymeric tubing is square cut and ready to use. Each package of polymeric tubing contains one piece of the specified length.

See also PEEK tubing, pages 90-91.



#### 1/16" OD polymeric tubing

	<b>.006" ID</b> <i>Prod No</i>	<b>.010" ID</b> <i>Prod No</i>	<b>.015" ID</b> <i>Prod No</i>	<b>.020" ID</b> <i>Prod No</i>	<b>.030" ID</b> <i>Prod No</i>
<b>PTFE</b>					
5 meters	TTF106-5M	TTF110-5M	TTF115-5M	TTF120-5M	TTF130-5M
10 meters	TTF106-10M	TTF110-10M	TTF115-10M	TTF120-10M	TTF130-10M
25 meters	TTF106-25M	TTF110-25M	TTF115-25M	TTF120-25M	TTF130-25M
<b>FEP</b>					
5 meters	—	TFEP110-5M	—	TFEP120-5M	TFEP130-5M
10 meters	—	TFEP110-10M	—	TFEP120-10M	TFEP130-10M
25 meters	—	TFEP110-25M	—	TFEP120-25M	TFEP130-25M
<b>ETFE</b>					
5 meters	—	TTZ110-5M	—	TTZ120-5M	TTZ130-5M
10 meters	—	TTZ110-10M	—	TTZ120-10M	TTZ130-10M
25 meters	—	TTZ110-25M	—	TTZ120-25M	TTZ130-25M

#### 1/8" OD polymeric tubing

	<b>.030" ID</b> <i>Prod No</i>	<b>.060" ID</b> <i>Prod No</i>	<b>.085" ID</b> <i>Prod No</i>
<b>PTFE</b>			
5 meters	TTF230-5M	TTF260-5M	TTF285-5M
10 meters	TTF230-10M	TTF260-10M	TTF285-10M
25 meters	TTF230-25M	TTF260-25M	TTF285-25M
<b>FEP</b>			
5 meters	—	TFEP260-5M	—
10 meters	—	TFEP260-10M	—
25 meters	—	TFEP260-25M	—
<b>ETFE</b>			
5 meters	—	TTZ260-5M	—
10 meters	—	TTZ260-10M	—
25 meters	—	TTZ260-25M	—

– Not available

#### MORE INFORMATION

PEEK tubing  
 Natural ..... page 90  
 Color-coded ..... 91  
 Striped ..... 91

#### CUSTOM LENGTHS

Custom lengths of PTFE tubing up to a maximum of 250' available on request. Additional charges may apply.

#### TUBING POLYMERS

**PTFE** Inert; very soft, easily cold flows. Produced as Teflon®

**FEP** Chemically resistant like PTFE, but lower creep and higher friction. More transparent than PTFE.

**ETFE** Resistant to most chemical attack; some chlorinated solvents will cause tubing to swell. Produced as Tefzel®

#### CONVERSIONS


10 ft = 3.05 m  
 25 ft = 7.62 m  
 100 ft = 30.48 m

#### CLEAN-CUT POLYMER TUBING CUTTER

For leak-free tubing connections in an LC system, right angles and clean cuts are essential. The Clean-Cut makes burr-free perpendicular cuts on polymeric tubing without distorting the outside diameter or closing the inside diameter. The handy pocket-sized tool features a unique safety locking mechanism to secure the blade when not in use.

*Prod No*

Clean-Cut tubing cutter JR-797  
 Replacement blade JR-798



#### TUBING CLIP – THE LC TUBING ORGANIZER

The tubing clip holds 1/16" and 1/8" polymer tubing precisely where you want them in your beakers, flasks, bottles, etc. up to 4 mm wall thickness. The stainless steel spring ensures a long lifetime.

*Package of 5:* *Prod No*

Tubing clip JR-9001-5

## Metal tubing, bulk quantities

Bulk metal tubing is not electrolytically cut or cleaned. The annealing process provides tubing which is sufficiently clean for most chromatography applications. (See note at left for custom-cleaned tubing.)

To order, specify the length required in one meter increments.

### CLEANED CUSTOM LENGTH TUBING

You can order custom length tubing which has been electrolytically cut, deburred, and steam cleaned. Please contact VICI or your local distributor for product numbers and pricing.

The maximum lengths available depends on the ID of the tubing:

Tubing ID	Max length
.005"	90 cm
.007"	150 cm
.010"	300 cm
.020"	600 cm
.026"	1200 cm
.030"	1500 cm
>.030"	1500 cm

Tubing up to 6 feet in length will be supplied straight. Longer tubes will be supplied coiled.

### CONVERSIONS

50 μm	=	.002"
100 μm	=	.004"
125 μm	=	.005"
150 μm	=	.006"
0.25 mm	=	.010"
0.50 mm	=	.020"
0.75 mm	=	.030"
1.0 mm	=	.040"
1.5 mm	=	.060"
2.0 mm	=	.080"
4.6 mm	=	.180"
6.0 mm	=	.236"
6.4 mm	=	.253"
7.0 mm	=	.275"
10.0 mm	=	.400"
27.0 mm	=	1.08"
1/32"	=	0.8 mm
1/16"	=	1.6 mm
1/8"	=	3.2 mm
1/4"	=	6.4 mm
3/8"	=	9.5 mm
1/2"	=	12.7 mm

### 316 stainless

Bulk quantities

Tubing ID	1/32" OD	1/16" OD	1/8" OD
	Prod No	Prod No	Prod No
.005"	TSS.505	TSS105	—
.007"	TSS.507	—	—
.010"	TSS.510	TSS110	—
.015"	—	TSS115	—
.020"	TSS.520	TSS120	—
.026"	—	TSS126	—
.030"	—	TSS130	TSS230
.040"	—	TSS140	TSS240
.060"	—	—	TSS260
.070"	—	—	TSS267
.085"	—	—	TSS285

### Nickel 200

Bulk quantities

Tubing ID	1/32" OD	1/16" OD	1/8" OD
	Prod No	Prod No	Prod No
.005"	—	TNI105	—
.010"	TNI.510	—	—
.020"	TNI.520	TNI120	—
.030"	—	TNI130	—
.040"	—	TNI140	—
.085"	—	—	TNI285

### Hastelloy C

Bulk quantities

Tubing ID	1/32" OD	1/16" OD	1/8" OD
	Prod No	Prod No	Prod No
.010"	—	THC110	—
.020"	—	THC120	—
.030"	—	THC130	—
.040"	—	THC140	—
.070"	—	—	THC270
.085"	—	—	THC285

### Inconel 600

Bulk quantities

Tubing ID	1/32" OD	1/16" OD	1/8" OD
	Prod No	Prod No	Prod No
.061"	—	—	TINCO261
.082"	—	—	TINCO282


— Not normally available

**TUBING**

**Pre-cut stainless tubing**

These packages of pre-cut Type 316 stainless tubing provide an economical solution to the problems that are caused by “seat-of-the-pants” cutting in the lab or field. They are priced to give a saving over the charge for custom-cut tubing.

All tubing is electrolytically cut and specially steam-cleaned with micro-filtered steam from deionized water, which removes both organic and inorganic contaminants.

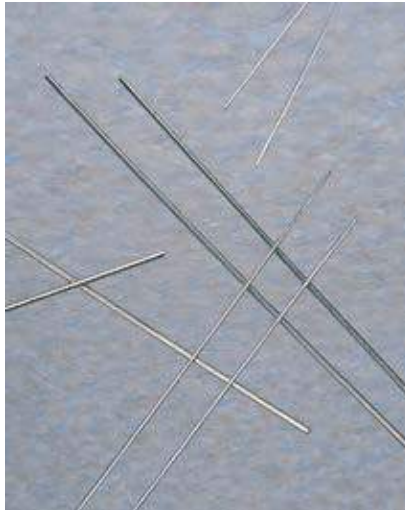

**1/32" OD stainless tubing**

*Pre-cut lengths*

<i>Length</i>	<b>.005" ID</b> <i>Prod No</i>	<b>.010" ID</b> <i>Prod No</i>	<b>.020" ID</b> <i>Prod No</i>
<i>2 pieces per package</i>			
5 cm	T5N5D	T5N10D	T5N20D
10 cm	T10N5D	T10N10D	T10N20D
20 cm	T20N5D	T20N10D	T20N20D
30 cm	T30N5D	T30N10D	T30N20D
50 cm	T50N5D	T50N10D	T50N20D
100 cm	—	T100N10D	T100N20D
<i>10 pieces per package</i>			
5 cm	T5N5-10	T5N10-10	T5N20-10
10 cm	T10N5-10	T10N10-10	T10N20-10
20 cm	T20N5-10	T20N10-10	T20N20-10
30 cm	T30N5-10	T30N10-10	T30N20-10
50 cm	T50N5-10	T50N10-10	T50N20-10
100 cm	—	T100N10-10	T100N20-10
<i>50 pieces per package</i>			
5 cm	T5N5-50	T5N10-50	T5N20-50
10 cm	T10N5-50	T10N10-50	T10N20-50
20 cm	T20N5-50	T20N10-50	T20N20-50
30 cm	T30N5-50	T30N10-50	T30N20-50
50 cm	T50N5-50	T50N10-50	T50N20-50
100 cm	—	T100N10-50	T100N20-50
<i>100 pieces per package</i>			
5 cm	T5N5-100	T5N10-100	T5N20-100
10 cm	T10N5-100	T10N10-100	T10N20-100
20 cm	T20N5-100	T20N10-100	T20N20-100
30 cm	T30N5-100	T30N10-100	T30N20-100
50 cm	T50N5-100	T50N10-100	T50N20-100
100 cm	—	T100N10-100	T100N20-100

**TECH TIP**

Forty years of Valco experience show that the particles left in poorly cut tubing are the number one cause of valve damage.

**CONVERSIONS**

- 5 cm = 1.97"
- 10 cm = 3.94"
- 20 cm = 7.87"
- 30 cm = 11.82"
- 50 cm = 19.68"
- 100 cm = 39.37"
- 0.12 mm = .005"
- 0.25 mm = .010"
- 0.50 mm = .020"
- 0.75 mm = .030"
- 1.0 mm = .040"
- 1.5 mm = .060"
- 2.0 mm = .080"
- 4.6 mm = .180"
- 6.0 mm = .236"
- 6.4 mm = .253"
- 7.0 mm = .275"
- 10.0 mm = .400"
- 27.0 mm = 1.08"
- 1/32" = 0.8 mm
- 1/16" = 1.6 mm
- 1/8" = 3.2 mm
- 1/4" = 6.4 mm
- 3/8" = 9.5 mm
- 1/2" = 12.7 mm



**1/16" OD stainless tubing**

*Pre-cut lengths*

<i>Length</i>	<b>.005" ID</b> <i>Prod No</i>	<b>.010" ID</b> <i>Prod No</i>	<b>.020" ID</b> <i>Prod No</i>	<b>.030" ID</b> <i>Prod No</i>	<b>.040" ID</b> <i>Prod No</i>
<i>2 pieces per package</i>					
5 cm	T5C5D	T5C10D	T5C20D	T5C30D	T5C40D
10 cm	T10C5D	T10C10D	T10C20D	T10C30D	T10C40D
20 cm	T20C5D	T20C10D	T20C20D	T20C30D	T20C40D
30 cm	T30C5D	T30C10D	T30C20D	T30C30D	T30C40D
50 cm	T50C5D	T50C10D	T50C20D	T50C30D	T50C40D
100 cm	—	T100C10D	T100C20D	T100C30D	T100C40D
<i>10 pieces per package</i>					
5 cm	T5C5-10	T5C10-10	T5C20-10	T5C30-10	T5C40-10
10 cm	T10C5-10	T10C10-10	T10C20-10	T10C30-10	T10C40-10
20 cm	T20C5-10	T20C10-10	T20C20-10	T20C30-10	T20C40-10
30 cm	T30C5-10	T30C10-10	T30C20-10	T30C30-10	T30C40-10
50 cm	T50C5-10	T50C10-10	T50C20-10	T50C30-10	T50C40-10
100 cm	—	T100C10-10	T100C20-10	T100C30-10	T100C40-10
<i>50 pieces per package</i>					
5 cm	T5C5-50	T5C10-50	T5C20-50	T5C30-50	T5C40-50
10 cm	T10C5-50	T10C10-50	T10C20-50	T10C30-50	T10C40-50
20 cm	T20C5-50	T20C10-50	T20C20-50	T20C30-50	T20C40-50
30 cm	T30C5-50	T30C10-50	T30C20-50	T30C30-50	T30C40-50
50 cm	T50C5-50	T50C10-50	T50C20-50	T50C30-50	T50C40-50
100 cm	—	T100C10-50	T100C20-50	T100C30-50	T100C40-50
<i>100 pieces per package</i>					
5 cm	T5C5-100	T5C10-100	T5C20-100	T5C30-100	T5C40-100
10 cm	T10C5-100	T10C10-100	T10C20-100	T10C30-100	T10C40-100
20 cm	T20C5-100	T20C10-100	T20C20-100	T20C30-100	T20C40-100
30 cm	T30C5-100	T30C10-100	T30C20-100	T30C30-100	T30C40-100
50 cm	T50C5-100	T50C10-100	T50C20-100	T50C30-100	T50C40-100
100 cm	—	T100C10-100	T100C20-100	T100C30-100	T100C40-100

**CLEANED CUSTOM LENGTH TUBING**

You can order custom length tubing which has been electrolytically cut, deburred, and steam cleaned. Please contact VICI or your local distributor for product numbers and pricing.

The maximum lengths available depends on the ID of the tubing:

<b>Tubing ID</b>	<b>Max length</b>
.005"	90 cm
.007"	150 cm
.010"	300 cm
.020"	600 cm
.026"	1200 cm
.030"	1500 cm
>.030"	1500 cm

Tubing up to 6 feet in length will be supplied straight. Longer tubes will be supplied coiled.

**VOLUME CHART**

<b>Tubing ID</b>	<b>Volume</b>		<b>Tubing ID</b>	<b>Volume</b>	
	<i>µl/cm</i>	<i>µl/in</i>		<i>µl/cm</i>	<i>µl/in</i>
.005"	0.13	0.32	.030"	4.56	11.58
.010"	0.51	1.29	.040"	8.11	20.59
.015"	1.14	2.90	.060"	18.24	46.33
.020"	2.03	5.15	.070"	24.83	63.06
.025"	3.17	8.04	.085"	36.61	92.99

Typical ID tolerances for our tubing are ±.001". This is much tighter than normal commercial grades of tubing; however, it is enough to result in noticeable error if exact volumes are not measured.

# Valve selection

## QUICK OVERVIEW OF OUR LINE-UP

Following is an overview of the many types of valves available from VICI.

### **Valco Injectors and Valves for GC** *pages 98-101, 104-113*

For over 40 years Valco valves have been the industry standard in gas chromatography. Models are available with 3, 4, 6, 8, 10, 12, or 14 ports, with 1/32", 1/16", 1/8", or 1/4" fittings, and with bore sizes from 0.25 mm (.010") to 4 mm (.156"). In addition, Valco valves offer the widest range of rotor and body materials of any valve available, with alloys and polymer composites capable of meeting virtually any system requirement. All models can be ordered in manual, pneumatic, or electrically actuated versions.



### **Valco Injectors and Valves for HPLC** *pages 101, 114-118*

A pioneer and industry leader in products for HPLC, Valco continues to offer the market's most diverse line in terms of number of ports, fitting sizes, materials of construction, and actuation. Versions with 3, 4, 6, 8, 10, 12 port are offered, with 1/32", 1/16", or 1/8" fittings. As with the GC line, Valco valves offer the widest range of rotor and body materials of any valves available, with alloys and polymer composites capable of meeting virtually any system requirement. All models can be ordered in manual, pneumatic, or electrically actuated versions.



### **Valco Selectors** *pages 102-103, 124-135*

One inherent benefit of the Valco conical rotary design is that it allows multiple planes of ports, facilitating unique multiposition configurations useful for stream selection, column selection, or trapping. Versions are available for GC and HPLC applications, with 1/16", 1/8", or 1/4" fittings, with bore sizes from 0.40 to 4.0 mm (.016" to .156"). Selectors are available for up to 16 streams (34 ports), all with Valco's trademark flexibility in terms of actuation and material options.



### **Diaphragm Valves for GC** *pages 142-145*

A diaphragm valve consists of plungers and ports arranged in a circular pattern, with the plungers controlled by the reciprocating action of two air actuated pistons. Extremely long lifetime (typically 1,000,000 cycles at ambient temperature; approximately 500,000 cycles at elevated temperatures), very short actuation time (10 milliseconds), minimum internal dead volume, and reliability have made this type of valve very successful in process gas chromatography for both sample injection and column switching. Our miniature version features 1/16" or 1/32" zero dead volume fittings, and is the first to offer a 10 port configuration in addition to the 6 port and internal sample 4 port models.





### Cheminert UHPLC Injectors

*pages 146-148, 154-157*

Many current analytical techniques require systems capable of pressures as high as 20,000 psi. UHPLC injectors from Cheminert feature a proprietary rotor material and stator coating that permit these pressures. Injectors are available in a variety of configurations, including models with a vertical injection port.

Nanovolume® UHPLC injectors feature a uniform flowpath as small as 100 microns (.004"). Specially-designed fittings allow direct connection of 360 micron OD PEEK, fused silica, or electroformed nickel tubing. Versions are also available with standard 1/32" or 1/16" fittings. Microbore UHPLC injectors offer flowpaths of 0.25 mm (.010"), with a choice of 1/32" or 1/16" fittings.



### Cheminert HPLC Injectors and Valves

*pages 146-149, 158-165*

The Cheminert HPLC line includes 4, 6, 8, and 10 port versions. The submicroliter injector has an injection volume as small as 10 nanoliters, and Nanovolume® internal sample injectors offer a volume down to 4 nanoliters. Valves feature 1/32" and 1/16" zero dead volume fittings, with bore sizes from 100 µm (.006") to 0.75 mm (.030") for nanobore, microbore, and analytical applications. Most models are available in manual, air, or electrically actuated versions, and some can be ordered with a proprietary coated stainless stator and high-strength PAEK rotor to ensure long periods of maintenance-free operation.



### Cheminert Injectors and Valves for Low Pressure Applications

*pages 146, 150, 166-169*

Cheminert's two position design offers 4, 6, 8, or 10 port configurations. The design features a choice of Valco 1/16" zero dead volume fittings or 1/4-28 Cheminert internal fittings for 1/16" or 1/8" OD tubing. All models are available in manual, air, or electrically actuated versions.



### Cheminert Selectors

*pages 152-153, 172-179*

Choose among 4, 6, 8, 10, 14, 20, 24, or 28 position stream selection valves, in high pressure and low pressure models, plus UHPLC selectors for up to 10 streams. A variety of configurations are available with bore sizes from 0.10 mm (.004") for HPLC column selection to 4.6 mm (.180") for applications requiring minimal restriction across the valve. Metal or all-polymeric valves can be ordered, with models available in manual, pneumatic, or electrically actuated versions.



### 40,000 psi Ultra-High Pressure Injector System

*page 84*

The VICI 40K injector is comprised of six miniature air actuated needle valves, plumbed to simulate the flow path of a conventional rotor/stator injector. An integral controller sends the on/off positioning signals to each valve, coordinating them to perform load, inject, and flush functions.

#### FOR OEMs

See our injectors for autosamplers and our new low and high pressure integrated motor/injector and motor/selector assemblies designed specifically to be built into OEM systems.

HPLC ..... pages 151, 180-183  
 Low pressure ..... 151, 184-185  
 Selectors ..... 153, 186-187



# Valco valves


FOR INJECTION, SWITCHING, AND STREAM SELECTION

- 1/32", 1/16", 1/8", or 1/4" Valco ZDV fittings
- 3, 4, 6, 8, 10, 12, and 14 port and internal sample two position versions
- Five multiposition flowpath configurations with as many as 16 positions
- A variety of materials for hostile environments and continuous use at elevated temperature
- Can be configured for use at temperatures up to 350°C or pressures up to 5,000 psi

The Valco design lends itself to a unique variety of connecting slots and port arrangements. The rotor is held in place by a preload assembly, which allows rotor replacement without removing loops and tubing and without disengaging the valve from the actuator or mounting bracket.

In addition, the preload assembly ensures that the valve is always reassembled to the factory-set tension.

**Two position injector** and valve descriptions are on page 101; product numbers and prices begin on page 104. For information on **selectors**, refer to pages 102-3.

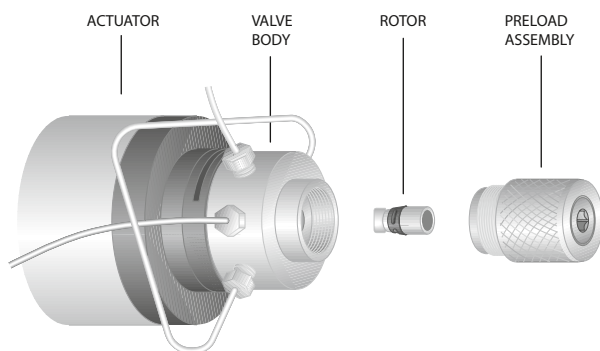

## TECH TIP

For optimal zero dead volume connections, make sure your tubing meets the best industry standards. The OD tolerance should be nominal dimension  $\pm .002$ ".

Fractional dimension	Nominal dimension
1/32"	.031
1/16"	.062
1/8"	.125
1/4"	.250
3/8"	.375
1/2"	.500

## MORE INFORMATION

Decoding Valco valve product no's... 266-269

## Valve descriptions

Chem inert injectors and valves... 146-151  
Chem inert selectors .. 146, 152-153  
Diaphragm... 142-143  
Valco two position... 101  
Valco selectors .. 102-103

## Valco valve prices

GC ..... 104-113  
HPLC..... 114-118  
Selector..... 124-135



The standard valve body material is Nitronic 60, a gall-resistant stainless steel which has proven superior to Type 316 or 303 in the majority of applications. Valves may also be ordered in Hastelloy C-22, Inconel 600, Type 316 stainless, Monel 400, Nickel 200, Nitronic 50, or Titanium.

Medium temperature GC valves have a rotor made of Valcon E, a polyaryletherketone/PTFE composite. The high temperature versions use a polyimide/PTFE/carbon composite designated Valcon T. Valcon H, a carbon-fiber-reinforced, PTFE-lubricated inert polymer, is standard in HPLC valves.

Appropriate fittings are supplied with all valves. Valves rated at 1000 psi or less have Type 303 stainless ferrules; those rated above 1000 psi have Type 316 stainless ferrules. A valve ordered with an optional body material is supplied with ferrules of the same material as the body, with Type 316 stainless nuts.

### Specifying a Special Body Material

To specify a special valve body material, add the material code to the end of the valve product number. Contact the factory for the additional cost.

*Example:  
An A4C6WE (air actuated 1/16" 6 port WE valve with a 4" standoff) made of Hastelloy C-22 would be designated A4C6WEHC.*

Due to design requirements, several special grades of stainless steel may be used where "HPLC grade" is noted. The specific types include Nitronic 60, Type 316 stainless steel, and Type 316L stainless steel. VICI will select the material to be used based on availability and quality. HPLC grade stainless is the standard material for all Valco two position valves and high pressure multiposition valves.

#### SPECIAL BODY MATERIAL — CODES

##### TWO POSITION VALVES

Body material	Code
HPLC grade Stainless steel	SS
Hastelloy C-22	HC
Inconel 600	IN
Monel 400	M4
Nickel	NI
Nitronic 50	N5
Titanium *	TI

##### MULTIPOSITION VALVES

Body material	Code
HPLC grade Stainless steel	SS
Hastelloy C-22	HC
Inconel 600	IN
Monel 400	M4
Nickel	NI
Nitronic 50	N5
Titanium *	TI

\* Not available for WT, UWT, or T series valves (high temp) due to material temperature limit.

#### MORE INFORMATION

Materials  
Metals . . . . . pp 254-255  
Polymers . . . . . 256  
Valve rotors . . . . . 257

### Reliably Clean

All finished valve bodies are ultrasonically cleaned with water soluble detergents and then rinsed with hot deionized water. Finally they are given a thorough cleaning with steam from deionized water.

During valve assembly each part is cleaned with isopropanol and dried with filtered and dehumidified air. The valves are then heated and switched prior to being leak tested.

### Precautions

After unpacking the valve, do not remove the protective tape from the valve ports until you are ready to install the valve. As supplied, all surfaces are clean and free of contaminants, and must be kept clean to prevent valve damage. Open ports and fittings cause unnecessary risk of particulate matter entering the valve and scratching the sealing surfaces, which is the most frequent cause of premature valve failure.

The most common source of contamination is particulates from tubing or unfiltered samples, or samples which leave a solid residue on drying (e.g. buffers).

Care should be taken that particles do not enter the valve.

#### TECH TIP

See **Technical Note 201, "Operation Notes and Cleaning Instructions"** for more detailed information about unpacking and handling the valve.

## Leak Testing

The standard test methods for cross-port and outport leakage insure valve performance at pressures and temperatures up to the specifications listed. For valves used on mass spectrometers or for ultra-trace fixed gas analysis, we recommend an optional test method utilizing a helium mass spectrometer, which provides data on mechanical leaks and on those due to seal porosity and permeability. With this method, we can certify leak rates as low as  $10^{-10}$  cc-atm/sec.

Please consult the factory prior to ordering, since the minimum leak rate will vary widely depending on valve configuration.

### Leak Rates for Gas Sampling Valves

The actual minimum leak rates attainable vary widely with seal material and valve type. In general, the acceptable leak rates fall into three ranges. (See chart below.)

In order to seal to less than  $10^{-7}$ , the valve loading tension is increased, which somewhat lowers the maximum operating temperature and the valve lifetime. Currently, only select material can seal to  $10^{-8}$  in most valve styles. Valcon M rotor material can seal to  $10^{-10}$ , but has a temperature limit of 50°C.

Not all valves can achieve these leak rates. As a general rule, the larger the valve seal and port size, the higher the leak rate.

### Test Method for Liquid Sampling Valves

The standard test method for liquid valves is a pressure drop over time for both crossport and outport leakage, using isopropanol at the specified test pressure. This test is designed to ensure proper performance at the specification limit.

#### RANGES FOR ACCEPTABLE LEAK RATES

$10^{-4}$ to $10^{-5}$ cc-atm/sec	<b>Commercial use</b> Not normally sold by VICI
$10^{-6}$ to $10^{-7}$ cc-atm/sec	<b>General GC use</b> Standard tension and components
$10^{-8}$ to $10^{-10}$ cc-atm/sec	<b>Ultra trace gas analysis</b> (ppb range) Higher tension and specially processed stator and rotor material

#### OPTIONAL LEAK TESTING with Helium Mass Spectrometer

To order a valve certified to have helium leak rates less than  $10^{-7}$  cc-atm/sec, add the suffix "Z" to the valve product number and contact the factory for the price.

Certified valves are supplied with gold-plated stainless steel ferrules.

We can generally tell you what leak rate is possible prior to manufacturing the valve.



Two position injectors and switching valves have many applications, as shown in the section beginning on page 119. In this catalog, Valco two position valves are divided into GC and HPLC sections, with the GC section starting on page 104 and the HPLC section on page 114.

### Sample Injectors

Since the most common method of sample injection utilizes a 6 port valve with an external sample loop, 6 port valves are often referred to as "injectors." However, as the Applications section shows, 6 port valves can do more than inject sample, and 8 and 10 port valves can be sample injectors at the same time they're also being backflushers or column switchers. One more variation is the 4 port internal sampling valve (*pages 104-5 and 114*), which is used when the sample size must be smaller than the smallest available loop. The internal sample "loop" is actually an engraved connecting slot on the rotor which is sized to contain a specified amount of sample.

### Sample Loops

Loops are electrolytically cut and electrochemically polished to ensure square, burr-free ends, then cleaned with microfiltered steam from deionized water. Standard material is Type 316 stainless, but loops can be supplied in electroformed nickel, Hastelloy C, Nickel 200, titanium, or several polymers. Consult the factory for availability.

Valco sample loops are accurately sized for each valve type. However, with small volume loops, the tolerance on the ID of the tubing ( $\pm 0.001''$ ) can have a significant effect on the volume. Therefore, loop volumes and loop appearance may differ from batch to batch.

### SPECIFICATIONS

#### VALCO TWO POSITION VALVES

Valve type	Standard rotor material	Max pressure	Max temp	Max pressure	Max temp
			<b>Internal sample injectors</b>		
			<b>Sampling and switching valves</b>		
<b>GC</b>					
W and UW	Valcon E	1000 psi liq	175°C	400 psi gas	225°C
	Valcon T	–	–	300 psi gas	330°C
MW	Valcon E2	–	–	100 psi gas	75°C
<b>HPLC</b>					
W and UW	Valcon H	5000 psi liq	75°C	5000 psi liq	75°C

### MORE INFORMATION

**Actuation** . . pp 188-209

**Applications** . . 119-123

#### Materials

- Metals . . . . . 254-255
- Polymers . . . . . 256
- Valve rotors . . . . . 257

#### Valve descriptions

- Cheminert injectors and valves . . . . . 146-151
- Cheminert selectors . . 146, 152-153
- Diaphragm . . . . . 142-153
- Valco selectors . . 102-103

#### Valco valve prices

- GC . . . . . 104-113
- HPLC . . . . . 114-118
- Selectors . . . . . 124-135

### VALVE TYPES

	Fitting size	Standard port diameter
W Type	1/32"	0.25 mm (.010")
	1/16"	0.40 mm (.016")
UW Type	1/16"	0.75 mm (.030")
	1/8"	0.75 mm (.030")
MW Type	1/4"	4.0 mm (.156")

For special port diameters, please consult the factory.

### OPTIONAL ROTORS

Valcon M	400 psi	50°C
Valcon P	400 psi	175°C
Valcon R	400 psi	75°C
Valcon TF	200 psi	50°C

See page 257 for a discussion of these optional rotor materials.

## VALCO VALVES

Instead of the back and forth switching of two position valves, selectors (multiposition valves) step incrementally through continuous revolutions (bi-directionally with universal and modular universal actuators). While we can supply older models, all the valves in this catalog have a preload assembly. This design allows the rotor to be inspected or replaced without taking the valve off the actuator, and valves ordered with a microelectric actuator are permanently aligned.

### Flowpath Configurations

**SD (dead-ended)** valves select one of 4 to 16 dead-ended streams, directing it through the valve outlet to a sample valve, pressure sensor, detector, column, etc. The same configuration can also direct one stream to a number of outlets for fraction collection.

**SC (common outlet)** selectors are similar to SDs, except that instead of being dead-ended the non-selected streams flow to a common outlet.

**SF (flow-through)** selectors are similar to SDs and SCs, selecting a stream and sending it to the outlet. However, SFs allow the non-selected streams to flow through individual outlets instead of a common outlet.

**ST (trapping)** selectors are used for multi-column, multi-sample, or multi-trap operations.

**STF (trapping/flow-through)** selectors are similar to STs, with the single difference being that the non-selected streams are returned to their own vents or sources rather than being dead-ended or trapped as they are in the standard ST configuration.

#### PORT DIAMETERS—

##### Low pressure (MW)

Fitting size	No. of Positions	Standard port diameter
1/16"	4 - 16	0.75 mm (.030")
1/8"	4 - 16	1.0 mm (.040")
1/4"	4 - 10	4.0 mm (.156")

#### SD

1/16"	4 - 16	0.75 mm (.030")
1/8"	4 - 16	1.0 mm (.040")
1/4"	4 - 10	4.0 mm (.156")

#### SC

1/16"	4 - 16	1.0 mm (.040")
1/8"	4 - 16	1.0 mm (.040")
1/4"	4 - 8	4.0 mm (.156")

#### SF

1/16"	4 - 16	1.0 mm (.040")
1/8"	4 - 16	1.0 mm (.040")
1/4"	4 - 8	4.0 mm (.156")

#### ST

1/16"	4 - 16	0.75 mm (.030")
1/8"	4 - 16	1.0 mm (.040")

#### STF

1/16"	4 - 16	0.75 mm (.030")
1/8"	4 - 16	1.0 mm (.040")

#### PORT DIAMETERS—

##### High pressure (UW)

Fitting size	No. of Positions	Standard port diameter
--------------	------------------	------------------------

#### SD

1/16"	4 - 12	0.40 mm (.016")
1/8"	4, 6, 8	0.75 mm (.030")

#### ST

1/16"	4, 6	0.40 mm (.016")
-------	------	-----------------



#### MORE INFORMATION Actuation . . pp 188-209

#### Applications . 119-123

#### Materials

Metals . . . . .	254-255
Polymers . . . . .	256
Valve rotors . . . . .	257

Specifying a special body material . . . . . 99

#### Selector prices

Low pressure	
SD . . . . .	124-125
SC . . . . .	126-127
SF . . . . .	128-129
ST . . . . .	130-131
STF . . . . .	132-133
High pressure	
SD . . . . .	134
ST . . . . .	135

Loops, if required, are found on corresponding valve pages.

For special port diameters, please consult the factory.



### Low Pressure Selectors

Valco **MW Type** selectors are available with 1/16", 1/8", or 1/4" fittings. (For port diameters, refer to the chart on the preceding page.) The 1/16" and 1/8" selectors can be ordered with 4, 6, 8, 10, 12, or 16 positions, in any of the five flowpath configurations. Selectors with 1/4" fittings are available in SD, SC, and SF flowpaths: SDs have 4, 6, 8, or 10 positions; SCs and SFs have 4, 6, or 8.

Although not shown in this catalog, MW selectors are also available in a higher temperature version. While actual specifications vary with the configuration, typical specifications are 200 psi and 330°C. Consult our technical staff for more information.

#### SPECIFICATIONS

##### VALCO SELECTORS – Low pressure (MW)

Fittings size	Number of positions	Standard rotor material	Max pressure	Max temp	Max pressure	Max temp	Max pressure	Max temp
			<b>SD Dead-end flowpath</b>		<b>SC Common outlet flowpath</b>			
1/16"	4 - 16	Valcon E	400 psi gas	200°C	200 psi gas	200°C	Note: All low pressure 1/16" and 1/8" valves are also available in versions up to 330°C.	
1/8"	4 - 8	Valcon E	400 psi gas	200°C	200 psi gas	200°C		
	10 - 16	Valcon E	200 psi gas	200°C	200 psi gas	200°C		
1/4"	4 - 8	Valcon E2	100 psi gas	75°C	100 psi gas	75°C		
			<b>SF Flow-through flowpath</b>		<b>ST Trapping flowpath</b>		<b>STF Trapping/Flow-through flowpath</b>	
1/16"	4 - 16	Valcon E	200 psi gas	200°C	200 psi gas	200°C	200 psi gas	200°C
1/8"	4 - 16	Valcon E	200 psi gas	200°C	200 psi gas	200°C	200 psi gas	200°C
1/4"	4 - 8	Valcon E2	100 psi gas	75°C	–	–	–	–

### High Pressure Selectors

Valco **UW Type** high pressure selectors are available in SD and ST flowpaths. SD selectors with 1/16" fittings are available in 4, 6, 8, 10, or 12 positions, while 1/8" selectors can be

ordered with 4, 6, 8, or 10 positions. ST flowpath UW selectors have 1/16" fittings, with either 4 or 6 positions. (For port diameters, refer to the chart on the preceding page.)

#### SPECIFICATIONS

##### VALCO SELECTORS – High pressure (UW)

Fittings size	Number of positions	Standard rotor material	Max pressure	Max temp	Max pressure	Max temp
			<b>SD Dead-end flowpath</b>		<b>ST Trapping flowpath</b>	
1/16"	4 - 12	Valcon E	5000 psi liq	75°C	5000 psi liq	75°C
1/8"	4 - 8	Valcon E	5000 psi liq	75°C	–	–

## Internal sample injectors, 1/32" fittings, 0.25 mm ports (.010")

W Type

Med temp

Internal sample

1/32" 0.25 mm

Includes 2" standoff. Manual version is not available without standoff.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply



Sample volume	.06 µl <i>Prod No</i>	.1 µl <i>Prod No</i>	.2 µl <i>Prod No</i>	.5 µl <i>Prod No</i>
Manual with standoff	2NI4WE.06	2NI4WE.1	2NI4WE.2	2NI4WE.5
With air actuator	A2NI4WE.06	A2NI4WE.1	A2NI4WE.2	A2NI4WE.5
With microelectric actuator	EP2NI4WE.06	EP2NI4WE.1	EP2NI4WE.2	EP2NI4WE.5
Replacement valve	DNI4WE.06	DNI4WE.1	DNI4WE.2	DNI4WE.5
Replacement rotor	SSANI4WE.06	SSANI4WE.1	SSANI4WE.2	SSANI4WE.5

## SPECS

1000 psi liq  
175°C max

Nitronic 60 valve body  
Valcon E rotor

## OPTIONS

- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-5)

## Internal sample injectors, 1/16" fittings, 0.40 mm ports (.016")

W Type

Med temp

Internal sample

1/16" 0.40 mm

Includes 2" standoff. Manual version has no standoff.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply



Sample volume	.06 µl <i>Prod No</i>	.1 µl <i>Prod No</i>	.2 µl <i>Prod No</i>	.5 µl <i>Prod No</i>
Manual	CI4WE.06	CI4WE.1	CI4WE.2	CI4WE.5
Manual with standoff	2CI4WE.06	2CI4WE.1	2CI4WE.2	2CI4WE.5
With air actuator	A2CI4WE.06	A2CI4WE.1	A2CI4WE.2	A2CI4WE.5
With microelectric actuator	EP2CI4WE.06	EP2CI4WE.1	EP2CI4WE.2	EP2CI4WE.5
Replacement valve	DCI4WE.06	DCI4WE.1	DCI4WE.2	DCI4WE.5
Replacement rotor	SSACI4WE.06	SSACI4WE.1	SSACI4WE.2	SSACI4WE.5

## SPECS

1000 psi liq  
175°C max

Nitronic 60 valve body  
Valcon E rotor

## OPTIONS

- 6 and 8 port valves available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-5)



W Type  
1/16" fittings

## MORE INFORMATION

Actuators	
Air	..... page 197
Manual	.....204
Microelectric	..... 190-1
Universal	..... 193
Materials	
Metals	..... 254-255
Polymers	.....256
Valve rotors	.....257
Standoff assemblies	.....205

## Internal sample injectors, 1/16" fittings, 0.75 mm ports (.030")

UW Type

## SPECS

1000 psi liq  
175°C maxNitronic 60 valve body  
Valcon E rotor

## OPTIONS

- 6 and 8 port valves available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-5)

Includes 2" standoff. Manual version has no standoff.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply



Med temp

Internal sample

1/16"

0.75 mm

Sample volume	.2 µl Prod No	.5 µl Prod No	1 µl Prod No	2 µl Prod No
Manual	CI4UWE.2	CI4UWE.5	CI4UWE1	CI4UWE2
Manual with standoff	2CI4UWE.2	2CI4UWE.5	2CI4UWE1	2CI4UWE2
With air actuator	A2CI4UWE.2	A2CI4UWE.5	A2CI4UWE1	A2CI4UWE2
With microelectric actuator	ED2CI4UWE.2	ED2CI4UWE.5	ED2CI4UWE1	ED2CI4UWE2
Replacement valve	DCI4UWE.2	DCI4UWE.5	DCI4UWE1	DCI4UWE2
Replacement rotor	SSACI4UWE.2	SSACI4UWE.5	SSACI4UWE1	SSACI4UWE2

## Internal sample injectors, 1/8" fittings, 0.75 mm ports (.030")

UW Type

## SPECS

1000 psi liq  
175°C maxNitronic 60 valve body  
Valcon E rotor

## OPTIONS

- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-5)

Includes 2" standoff. Manual version has no standoff.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply



Med temp

Internal sample

1/8"

0.75 mm

Sample volume	.2 µl Prod No	.5 µl Prod No	1 µl Prod No	2 µl Prod No
Manual	I4UWE.2	I4UWE.5	I4UWE1	I4UWE2
Manual with standoff	2I4UWE.2	2I4UWE.5	2I4UWE1	2I4UWE2
With air actuator	A2I4UWE.2	A2I4UWE.5	A2I4UWE1	A2I4UWE2
With microelectric actuator	ED2I4UWE.2	ED2I4UWE.5	ED2I4UWE1	ED2I4UWE2
Replacement valve	DI4UWE.2	DI4UWE.5	DI4UWE1	DI4UWE2
Replacement rotor	SSAI4UWE.2	SSAI4UWE.5	SSAI4UWE1	SSAI4UWE2

UW Type  
1/8" fittings

**Sampling and switching valves, 1/32" fittings, 0.25 mm ports (.010")**

*W Type*

Med temp

1/32" 0.25 mm

Includes 4" standoff. Manual version not available without standoff.  
 Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply  
 Sample loops are not included with valves. Order separately.

**SPECS**

**400 psi gas**  
**225°C max**  
 Nitronic 60 valve body  
 Valcon E rotor

For 300 psi, 350°C max, see facing page.

**OPTIONS**

- 3 and 12 port valves available
- 2", 3", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-5)



**4 Ports**  
Prod No



**6 Ports**  
Prod No



**8 Ports**  
Prod No



**10 Ports**  
Prod No

Manual with standoff	4N4WE	4N6WE	4N8WE	4N10WE
With air actuator	A4N4WE	A4N6WE	A4N8WE	A4N10WE
With microelectric actuator	EH4N4WE	EH4N6WE	EH4N8WE	EH4N10WE
Replacement valve	DN4WE	DN6WE	DN8WE	DN10WE
Replacement rotor	SSAN4WE	SSAN6WE	SSAN8WE	SSAN10WE



**W Type**  
1/32" fittings

**1/32" Stainless steel loops** *for W Type valves*

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.



Volume	Prod No	Volume	Prod No
2 µl	SL2NW	25 µl	SL25NW
5 µl	SL5NW	50 µl	SL50NW
10 µl	SL10NW	100 µl	SL100NW
15 µl	SL15NW	250 µl	SL250NW
20 µl	SL20NW	500 µl	SL500NW

**ABOUT LOOPS**

- Other materials available in many sizes: Electroformed Nickel, Nickel 200, PEEK, and PTFE
- Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.

**MORE INFORMATION**

Actuators  
 Air ..... page 197  
 Manual.....204  
 Microelectric ..... 190-1  
 Universal ..... 193  
 Materials  
 Metals..... 254-255  
 Polymers ..... 256  
 Valve rotors..... 257  
 Standoff assemblies ..... 205

**Sampling and switching valves, 1/32" fittings, 0.25 mm ports (.010")**

W Type

**SPECS**

**300 psi gas**  
**350°C max**  
 Nitronic 60 valve body  
 Valcon T rotor

For 400 psi, 225°C max,  
 see facing page

**OPTIONS**

- 3 and 12 port valves available
- 2", 3", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-5)

Includes 4" standoff. Manual version not available without standoff.  
 Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply  
 Sample loops are not included with valves. Order separately.

**High temp**  
**1/32" 0.25 mm**



**4 Ports**  
*Prod No*



**6 Ports**  
*Prod No*



**8 Ports**  
*Prod No*



**10 Ports**  
*Prod No*

Manual with standoff	4N4WT	4N6WT	4N8WT	4N10WT
With air actuator	A4N4WT	A4N6WT	A4N8WT	A4N10WT
With microelectric actuator	EH4N4WT	EH4N6WT	EH4N8WT	EH4N10WT
Replacement valve	DN4WT	DN6WT	DN8WT	DN10WT
Replacement rotor	SSAN4WT	SSAN6WT	SSAN8WT	SSAN10WT



**W Type**  
**1/32" fittings**

**ABOUT LOOPS**

- Other materials available in many sizes: Electroformed Nickel, Nickel 200, PEEK, and PTFE
- Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.

**1/32" Stainless steel loops**

for W Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.



Volume	Prod No	Volume	Prod No
2 µl	SL2NW	25 µl	SL25NW
5 µl	SL5NW	50 µl	SL50NW
10 µl	SL10NW	100 µl	SL100NW
15 µl	SL15NW	250 µl	SL250NW
20 µl	SL20NW	500 µl	SL500NW

**Sampling and switching valves, 1/16" fittings, 0.40 mm (.016")**

*W*Type

**Med temp**  
**1/16" 0.40 mm**

Includes 4" standoff Manual version has no standoff  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply  
Sample loops are not included with valves. Order separately.

**SPECS**

**400 psi gas**  
**225°C max**  
Nitronic 60 valve body  
Valcon E rotor

For 300 psi, 350°C max, see page 110.

**OPTIONS**

- 3 and 12 port valves available
- 2", 3", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-5)
- Smaller and larger bores available in most configurations.



**4 Ports**  
*Prod No*



**6 Ports**  
*Prod No*



**8 Ports**  
*Prod No*



**10 Ports**  
*Prod No*

Manual	C4WE	C6WE	C8WE	C10WE
Manual with standoff	4C4WE	4C6WE	4C8WE	4C10WE
With air actuator	A4C4WE	A4C6WE	A4C8WE	A4C10WE
With microelectric actuator	EH4C4WE	EH4C6WE	EH4C8WE	EH4C10WE
Replacement valve	DC4WE	DC6WE	DC8WE	DC10WE
Replacement rotor	SSAC4WE	SSAC6WE	SSAC8WE	SSAC10WE



**W Type**  
**1/16" fittings**

**1/16" Stainless steel loops** *for W Type valves*

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.



<i>Volume</i>	<i>Prod No</i>	<i>Volume</i>	<i>Prod No</i>
2 µl	SL2CW	100 µl	SL100CW
5 µl	SL5CW	250 µl	SL250CW
10 µl	SL10CW	500 µl	SL500CW
15 µl	SL15CW	1 ml	SL1KCW
20 µl	SL20CW	2 ml	SL2KCW
25 µl	SL25CW	5 ml	SL5KCW
50 µl	SL50CW	10 ml	SL10KCW

**ABOUT LOOPS**

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.
- Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.

**MORE INFORMATION**

Actuators  
Air ..... page 197  
Manual.....204  
Microelectric ..... 190-1  
Universal ..... 193  
Materials  
Metals..... 254-25 5  
Polymers ..... 256  
Valve rotors.....257  
Standoff assemblies .....205

## Sampling and switching valves, 1/16" fittings, 0.75 mm ports (.030")

UW Type

## SPECS

400 psi gas  
225°C max

Nitronic 60 valve body  
Valcon E rotor

For 300 psi, 330°C max,  
see page 111.

## OPTIONS

- 3, 12 and 14 port valves available
- 2", 3", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-5)
- Larger bore available

Includes 4" standoff. Manual version has no standoff.

Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply

Sample loops are not included with valves. Order separately.

Med temp

1/16" 0.75 mm



**4 Ports**  
Prod No

Manual  
Manual with standoff

C4UWE  
4C4UWE

With air actuator  
With microelectric actuator

A4C4UWE  
ED4C4UWE

Replacement valve  
Replacement rotor

DC4UWE  
SSAC4UWE



**6 Ports**  
Prod No

C6UWE  
4C6UWE

A4C6UWE  
ED4C6UWE

DC6UWE  
SSAC6UWE



**8 Ports**  
Prod No

C8UWE  
4C8UWE

A4C8UWE  
ED4C8UWE

DC8UWE  
SSAC8UWE



**10 Ports**  
Prod No

C10UWE  
4C10UWE

A4C10UWE  
ED4C10UWE

DC10UWE  
SSAC10UWE



**UW Type**  
1/16" fittings

## ABOUT LOOPS

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.
- Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.

## 1/16" Stainless steel loops

for UW Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.



Volume	Prod No	Volume	Prod No
5 µl	SL5CUW	100 µl	SL100CUW
10 µl	SL10CUW	250 µl	SL250CUW
15 µl	SL15CUW	500 µl	SL500CUW
20 µl	SL20CUW	1 ml	SL1KCUW
25 µl	SL25CUW	2 ml	SL2KCUW
50 µl	SL50CUW	5 ml	SL5KCUW
		10 ml	SL10KCUW

VALCO VALVES

Sampling and switching valves, 1/16" fittings, 0.40 mm ports (.016")

W Type

High temp

1/16" 0.40 mm

Includes 4" standoff  
 Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply  
 Sample loops are not included with valves. Order separately.

SPECS

300 psi gas  
 350°C max

Nitronic 60 valve body  
 Valcon T rotor

For 400 psi, 225°C max,  
 see page 108.

OPTIONS

- 3 and 12 port valves available  
 UW type: 3, 12, and 14 port valves available
- 2", 3", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-5)
- Smaller and larger bores available in most configurations.



4 Ports  
 Prod No



6 Ports  
 Prod No




8 Ports  
 Prod No



10 Ports  
 Prod No

Manual with standoff	4C4WT	4C6WT	4C8WT	4C10WT
With air actuator	A4C4WT	A4C6WT	A4C8WT	A4C10WT
With microelectric actuator	EH4C4WT	EH4C6WT	EH4C8WT	EH4C10WT
Replacement valve	DC4WT	DC6WT	DC8WT	DC10WT
Replacement rotor	SSAC4WT	SSAC6WT	SSAC8WT	SSAC10WT

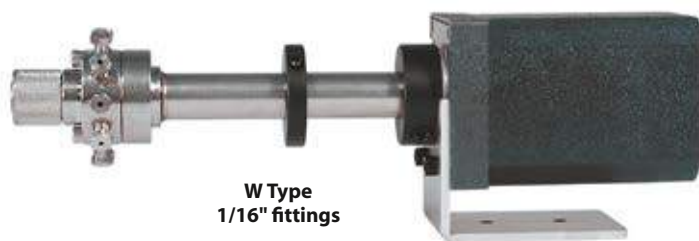

W Type  
 1/16" fittings

1/16" Stainless steel loops

for W Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.



Volume	Prod No	Volume	Prod No
2 µl	SL2CW	100 µl	SL100CW
5 µl	SL5CW	250 µl	SL250CW
10 µl	SL10CW	500 µl	SL500CW
15 µl	SL15CW	1 ml	SL1KCW
20 µl	SL20CW	2 ml	SL2KCW
25 µl	SL25CW	5 ml	SL5KCW
50 µl	SL50CW	10 ml	SL10KCW

ABOUT LOOPS

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.
- Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.

MORE INFORMATION

Actuators  
 Air ..... page 197  
 Manual ..... 204  
 Microelectric ..... 190-1  
 Universal ..... 193

Materials  
 Metals ..... 254-255  
 Polymers ..... 256  
 Valve rotors ..... 257

Standoff assemblies ..... 205



**Sampling and switching valves, 1/16" fittings, 0.75 mm ports (.030")**

UW Type

**SPECS**

**300 psi gas**  
**330°C max**  
 Nitronic 60 valve body  
 Valcon T rotor

For 400 psi, 225°C max, see page 109.

**OPTIONS**

- 3, 12 and 14 port valves available
- 2", 3", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-5)
- Larger bore available

Includes 4" standoff  
 Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply  
 Sample loops are not included with valves. Order separately.

**High temp**  
**1/16" 0.75 mm**



**4 Ports**  
Prod No



**6 Ports**  
Prod No




**8 Ports**  
Prod No



**10 Ports**  
Prod No

Manual with standoff	4C4UWT	4C6UWT	4C8UWT	4C10UWT
With air actuator	A4C4UWT	A4C6UWT	A4C8UWT	A4C10UWT
With microelectric actuator	ED4C4UWT	ED4C6UWT	ED4C8UWT	ED4C10UWT
Replacement valve	DC4UWT	DC6UWT	DC8UWT	DC10UWT
Replacement rotor	SSAC4UWT	SSAC6UWT	SSAC8UWT	SSAC10UWT

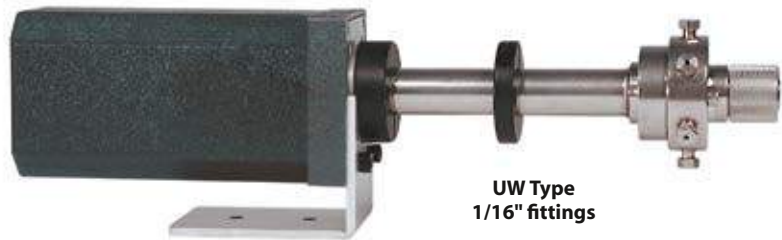

**UW Type**  
**1/16" fittings**

**ABOUT LOOPS**

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.
- Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.

**1/16" Stainless steel loops for UW Type valves**

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.



Volume	Prod No	Volume	Prod No
5 µl	SL5CUW	100 µl	SL100CUW
10 µl	SL10CUW	250 µl	SL250CUW
15 µl	SL15CUW	500 µl	SL500CUW
20 µl	SL20CUW	1 ml	SL1KCUW
25 µl	SL25CUW	2 ml	SL2KCUW
50 µl	SL50CUW	5 ml	SL5KCUW
		10 ml	SL10KCUW

### Sampling and switching valves, 1/8" fittings, 0.75 mm ports (.030")

UWType

Med temp

1/8" 0.75 mm

Includes 4" standoff. Manual version has no standoff.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply  
Sample loops are not included with valves. Order separately (*see facing page*).

#### SPECS

400 psi gas  
225°C max

Nitronic 60 valve body  
Valcon E rotor

For 300 psi, 330°C max,  
see facing page.

#### OPTIONS

- 3, 12, and 14 port valves available
- 2", 3", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (*see pages 254-5*)
- Larger bore available



**4 Ports**  
Prod No



**6 Ports**  
Prod No



**8 Ports**  
Prod No



**10 Ports**  
Prod No

Manual	4UWE	6UWE	8UWE	n/a
Manual with standoff	44UWE	46UWE	48UWE	410UWE
With air actuator	A44UWE	A46UWE	A48UWE	A410UWE
With microelectric actuator	ED44UWE	ED46UWE	ED48UWE	ED410UWE
Replacement valve	D4UWE	D6UWE	D8UWE	D10UWE
Replacement rotor	SSA4UWE	SSA6UWE	SSA8UWE	SSA10UWE

### Sampling and switching valves, 1/4" fittings, 4.0 mm ports (.156")

MWType

Low temp

1/4" 4.0 mm

Includes 4" standoff. Manual version not available without standoff.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply  
Sample loops are not available.

#### SPECS

100 psi gas  
75°C max

Nitronic 60 valve body  
Valcon E2 rotor

#### OPTIONS

- 2", 3", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (*see pages 254-5*)



**4 Ports**  
Prod No



**6 Ports**  
Prod No



**8 Ports**  
Prod No

Manual with standoff	4VL4MWE2	4VL6MWE2	4VL8MWE2
With air actuator	A4VL4MWE2	A4VL6MWE2	A4VL8MWE2
With microelectric actuator	ET4VL4MWE2	ET4VL6MWE2	ET4VL8MWE2
Replacement valve	DVL4MWE2	DVL6MWE2	DVL8MWE2
Replacement rotor	SSAVL4MWE2	SSAVL6MWE2	SSAVL8MWE2



MW Type  
1/4" fittings

**Sampling and switching valves, 1/8" fittings, 0.75 mm ports (.030")**

UW Type

**SPECS**

**300 psi gas**  
**330°C max**  
 Nitronic 60 valve body  
 Valcon T rotor





For 400 psi, 225°C max,  
 see facing page.


**OPTIONS**

- 3, 12, and 14 port valves available
- 2", 3", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-5)
- Larger bore available

Includes 4" standoff. Manual version not available without standoff.  
 Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply  
 Sample loops are not included with valves. Order separately.

**High temp**  
**1/8" 0.75 mm**

	 <b>4 Ports</b> <i>Prod No</i>	 <b>6 Ports</b> <i>Prod No</i>	 <b>8 Ports</b> <i>Prod No</i>	 <b>10 Ports</b> <i>Prod No</i>
Manual with standoff	44UWT	46UWT	48UWT	410UWT
With air actuator	A44UWT	A46UWT	A48UWT	A410UWT
With microelectric actuator	ED44UWT	ED46UWT	ED48UWT	ED410UWT
Replacement valve	D4UWT	D6UWT	D8UWT	D10UWT
Replacement rotor	SSA4UWT	SSA6UWT	SSA8UWT	SSA10UWT

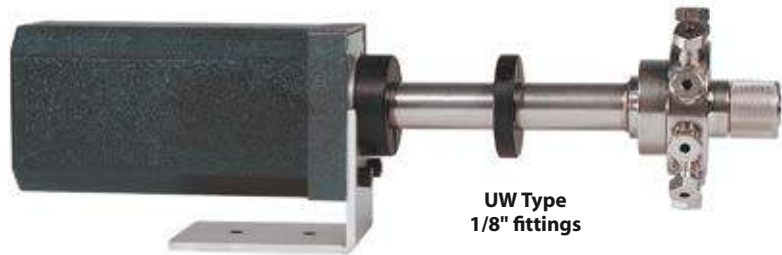

**ABOUT LOOPS**

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops <100 µl are made from 1/16" OD tubing with brazed or welded 1/8" tube ends.
- Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.

**MORE INFORMATION**

Actuators  
 Air ..... page 197  
 Manual ..... 204  
 Microelectric ..... 190-1  
 Universal ..... 193

Materials  
 Metals ..... 254-255  
 Polymers ..... 256  
 Valve rotors ..... 257

Standoff assemblies ..... 205



**1/8" Stainless steel loops for UW Type valves**

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.

Volume	Prod No	Volume	Prod No
10 µl	SL10UW	250 µl	SL250UW
15 µl	SL15UW	500 µl	SL500UW
20 µl	SL20UW	1 ml	SL1KUW
25 µl	SL25UW	2 ml	SL2KUW
50 µl	SL50UW	5 ml	SL5KUW
100 µl	SL100UW	10 ml	SL10KUW
		20 ml	SL20KUW

**VALCO VALVES**

**Internal sample injectors, 1/16" fittings, 0.40 mm ports (.016")**  
**0.25 mm column port diameter (.010")**

*W Type*

**5,000 psi**  
**Internal sample**  
**1/16" 0.40 mm**

Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply



Sample volume	.06 µl <i>Prod No</i>	.1 µl <i>Prod No</i>	.2 µl <i>Prod No</i>	.5 µl <i>Prod No</i>
Manual	CI4W.06	CI4W.1	CI4W.2	CI4W.5
With air actuator	ACI4W.06	ACI4W.1	ACI4W.2	ACI4W.5
With microelectric actuator	EPCI4W.06	EPCI4W.1	EPCI4W.2	EPCI4W.5
Replacement valve	DCI4W.06	DCI4W.1	DCI4W.2	DCI4W.5
Replacement rotor	SSACI4W.06	SSACI4W.1	SSACI4W.2	SSACI4W.5

**SPECS**

**5000 psi liq**  
**75°C max**  
 Nitronic 60 valve body  
 Valcon H rotor

**OPTIONS**

- 2", 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-5)
- 1/32" fittings with 0.25 mm bore (.010") also available. Consult factory for product number and pricing.



**W Type**  
**1/16" fittings**

**Internal sample injectors, 1/16" fittings, 0.75 mm ports (.030")**

*UW Type*

**5,000 psi**  
**Internal sample**  
**1/16" 0.75 mm**

Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply



Sample volume	.2 µl <i>Prod No</i>	.5 µl <i>Prod No</i>	1 µl <i>Prod No</i>	2 µl <i>Prod No</i>
Manual with 2" standoff	2CI4UW.2	2CI4UW.5	2CI4UW1	2CI4UW2
With air actuator	ACI4UW.2	ACI4UW.5	ACI4UW1	ACI4UW2
With microelectric actuator	EDCI4UW.2	EDCI4UW.5	EDCI4UW1	EDCI4UW2
Replacement valve	DCI4UW.2	DCI4UW.5	DCI4UW1	DCI4UW2
Replacement rotor	SSACI4UW.2	SSACI4UW.5	SSACI4UW1	SSACI4UW2

**SPECS**

**5000 psi liq**  
**75°C max**  
 Nitronic 60 valve body  
 Valcon H rotor

**OPTIONS**

- 2", 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-5)
- 1/32" fittings with 0.25 mm bore (.010") also available. Consult factory for product number and pricing.

**NOTE**

These valves are not available in manual closemount version.



**UW Type**  
**1/16" fittings**

**Injectors and switching valves, 1/16" fittings, 0.40 mm ports (.016")**

W Type

**SPECS**





**5000 psi liq**  
**75°C max**  
 Nitronic 60 valve body  
 Valcon H rotor

**OPTIONS**

- 3 and 12 port valves available
- 2", 3", 4", and 6" standoffs
- 1/32" and 1/16" versions available with 0.25 mm (.010") bore
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-5)

Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply  
 Sample loops are not included with valves. Order separately.

5,000 psi	
Analytical	
1/16"	0.40 mm

				
	<b>4 Ports</b>	<b>6 Ports</b>	<b>8 Ports</b>	<b>10 Ports</b>
	<i>Prod No</i>	<i>Prod No</i>	<i>Prod No</i>	<i>Prod No</i>
Manual	C4W	C6W	C8W	C10W
With air actuator	AC4W	AC6W	AC8W	AC10W
With microelectric actuator	EPC4W	EPC6W	EPC8W	EPC10W
Replacement valve	DC4W	DC6W	DC8W	DC10W
Replacement rotor	SSAC4W	SSAC6W	SSAC8W	SSAC10W



**W Type**  
**1/16" fittings**

**OPTIONAL FLOWPATH**

Model C6W 6 port valves can also be ordered with a dual 3-way rotor, as described in EPA Method 555.

To specify this flowpath, substitute "2X3" for "6" in the valve or rotor product number.



**MORE INFORMATION**

Actuators

Air .....	page 197
Manual .....	204
Microelectric .....	190-1
Universal .....	193

Materials

Metals .....	254-255
Polymers .....	256
Valve rotors .....	257

Standoff assemblies .....

	205
--	-----

**ABOUT LOOPS**

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.
- Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.

**1/16" Stainless steel loops**

for W Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.



Volume	Prod No	Volume	Prod No
2 µl	SL2CW	100 µl	SL100CW
5 µl	SL5CW	250 µl	SL250CW
10 µl	SL10CW	500 µl	SL500CW
15 µl	SL15CW	1 ml	SL1KCW
20 µl	SL20CW	2 ml	SL2KCW
25 µl	SL25CW	5 ml	SL5KCW
50 µl	SL50CW	10 ml	SL10KCW

VALCO VALVES

**Injectors and switching valves, 1/16" fittings, 0.75 mm ports (.030")**

*UW Type*

- 5,000 psi**
- Semi-prep**
- 1/16"
0.75 mm

Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply  
 Sample loops are not included with valves. Order separately.

**SPECS**

**5000 psi liq  
 75°C max**

Nitronic 60 valve body  
 Valcon H rotor

**OPTIONS**

- 3, 12, and 14 port valves available
- 2", 3", 4", and 6" standoffs
- 1/32" and 1/16" versions available with 0.25 mm (.010") bore
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-5)
- Larger bore available.

**NOTE**

These valves are not available in manual closemount version.



**4 Ports**  
*Prod No*



**6 Ports**  
*Prod No*



**8 Ports**  
*Prod No*



**10 Ports**  
*Prod No*

- Manual with 2" standoff
- With air actuator
- With microelectric actuator
- Replacement valve
- Replacement rotor

2C4UW  
 AC4UW  
 EDC4UW

2C6UW  
 AC6UW  
 EDC6UW

2C8UW  
 AC8UW  
 EDC8UW

2C10UW  
 AC10UW  
 EDC10UW

DC4UW  
 SSAC4UW

DC6UW  
 SSAC6UW

DC8UW  
 SSAC8UW

DC10UW  
 SSAC10UW



**UW Type**  
**1/16" fittings**

**1/16" Stainless steel loops**

*for UW Type valves*

Each stainless steel loop includes two stainless nuts and two stainless ferrules.  
 Order special fittings separately.



Volume	Prod No	Volume	Prod No
3 µl	SL3CUW	100 µl	SL100CUW
5 µl	SL5CUW	250 µl	SL250CUW
10 µl	SL10CUW	500 µl	SL500CUW
15 µl	SL15CUW	1 ml	SL1KCUW
20 µl	SL20CUW	2 ml	SL2KCUW
25 µl	SL25CUW	5 ml	SL5KCUW
50 µl	SL50CUW	10 ml	SL10KCUW

**ABOUT LOOPS**

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.
- Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.

**Injectors and switching valves, 1/8" fittings, 0.75 mm (.030")**

UW Type

**SPECS**

**5000 psi liq**  
**75°C max**  
 Nitronic 60 valve body  
 Valcon H rotor

**OPTIONS**

- 3 and 12 port valves available
- 2", 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-5)
- Larger bore available. (see page 118)

**NOTE**





These valves are not available in manual closemount version.

Manual 10 port includes 2" standoff.  
 Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply  
 Sample loops are not included with valves. Order separately.

**5,000 psi**

**Semi-prep**

**1/8" 0.75 mm**

				
	<b>4 Ports</b> <i>Prod No</i>	<b>6 Ports</b> <i>Prod No</i>	<b>8 Ports</b> <i>Prod No</i>	<b>10 Ports</b> <i>Prod No</i>
Manual with 2" standoff	24UW	26UW	28UW	210UW
With air actuator	A4UW	A6UW	A8UW	A10UW
With microelectric actuator	ED4UW	ED6UW	ED8UW	ED10UW
Replacement valve	D4UW	D6UW	D8UW	D10UW
Replacement rotor	SSA4UW	SSA6UW	SSA8UW	SSA10UW



**UW Type**  
**1/8" fittings**

**ABOUT LOOPS**

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops < 100 µl are made from 1/16" OD tubing with brazed or welded 1/8" tube ends.
- Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.

**MORE INFORMATION**

Actuators

Air ..... page 197

Manual ..... 204

Microelectric ..... 190-1

Universal ..... 193

Materials

Metals ..... 254-255

Polymers ..... 256

Valve rotors ..... 257

Standoff assemblies ..... 205



**1/8" Stainless steel loops** for UW Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.

Volume	Prod No	Volume	Prod No
10 µl	SL10UW	250 µl	SL250UW
15 µl	SL15UW	500 µl	SL500UW
20 µl	SL20UW	1 ml	SL1KUW
25 µl	SL25UW	2 ml	SL2KUW
50 µl	SL50UW	5 ml	SL5KUW
100 µl	SL100UW	10 ml	SL10KUW
		20 ml	SL20KUW

VALCO VALVES

Injectors and switching valves, 1/8" fittings, large bore

UW Type

5,000 psi

Prep

1/8" Large bore

Manual 10 port includes 2" standoff.  
 Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.  
 Sample loops are not included with valves. Order separately.

**SPECS**

5000 psi liq  
 75°C max

Nitronic 60 valve body  
 Valcon H rotor

**OPTIONS**

- 3 port valve available
- 2", 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium, Zirconium (see pages 254-5)
- Smaller bore available. (see page 117)

**NOTE**

These valves are not available in manual closemount version.



**4 Ports**  
 1.7 mm (.067")  
 Prod No



**6 Ports**  
 1.7 mm (.067")  
 Prod No



**8 Ports**  
 1.3 mm (.050")  
 Prod No



**10 Ports**  
 1.0 mm (.040")  
 Prod No

Manual with 2" standoff  
 With air actuator  
 With microelectric actuator

2L4UW  
 AL4UW  
 EDL4UW

2L6UW  
 AL6UW  
 EDL6UW

2L8UW  
 AL8UW  
 EDL8UW

2L10UW  
 AL10UW  
 EDL10UW

Replacement valve  
 Replacement rotor

DL4UW  
 SSAL4UW

DL6UW  
 SSAL6UW

DL8UW  
 SSAL8UW

DL10UW  
 SSAL10UW



UW Type  
 1/8" fittings

**ABOUT LOOPS**

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops < 100 µl are made from 1/16" OD tubing with brazed or welded 1/8" tube ends..
- Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.

**MORE INFORMATION**

Actuators  
 Air ..... page 197  
 Manual.....204  
 Microelectric ..... 190-1  
 Universal ..... 193  
 Materials  
 Metals..... 254-255  
 Polymers .....256  
 Valve rotors.....257  
 Standoff assemblies .....205

1/8" Stainless steel loops for UW Type valves


Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately.

Volume	Prod No	Volume	Prod No
100 µl	SL100UW	2 ml	SL2KUW
250 µl	SL250UW	5 ml	SL5KUW
500 µl	SL500UW	10 ml	SL10KUW
1 ml	SL1KUW	20 ml	SL20KUW






4 port internal sample injector

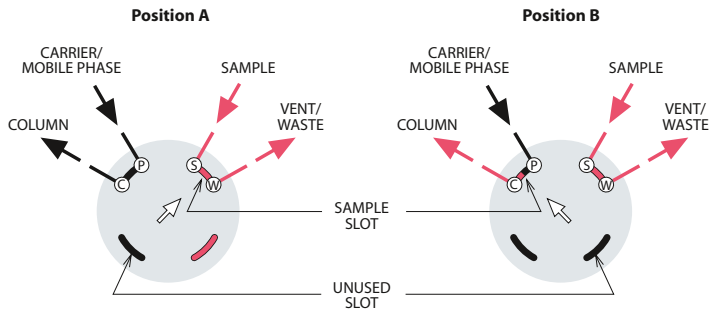

**MICROVOLUME SAMPLE INJECTION**

The internal sample (fixed volume) flowpath is used when very small sample volumes are required. The sample size is determined by a passage engraved on the valve rotor, allowing precise, repeatable injections. In Position A, the sample flows through the sample passage while the mobile phase flows through to the column. The third passage is inactive. In Position B, the sample passage is in line with the column and the mobile phase injects the contents of the sample passage onto the column. The passage which was inactive in Position A allows the sample to continue flowing without interruption.

6 port internal sample injector

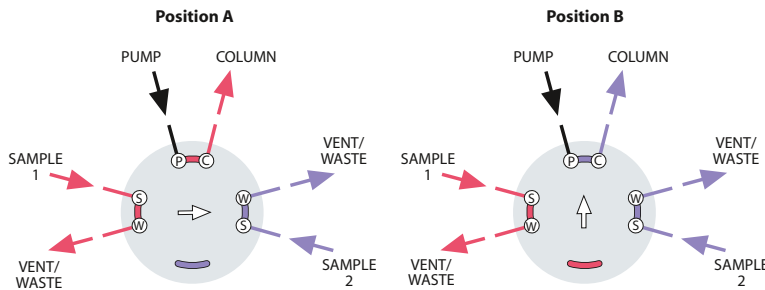


**DUAL MICROVOLUME SAMPLE INJECTION**

This microvolume injector can be used to alternate between two different samples. Each time the valve is switched, a sample is injected. By connecting the two sample inlets in series, the valve injects the sample each time the valve switches. This is particularly useful in heavy duty cycle operations to minimize valve wear. The valve can also be used to make alternating injections of the same sample onto two different columns by swapping sample/waste and pump/column connections.

*Note:* This CI6 valve is not shown in this catalog. Call for details.

3 port switching valve

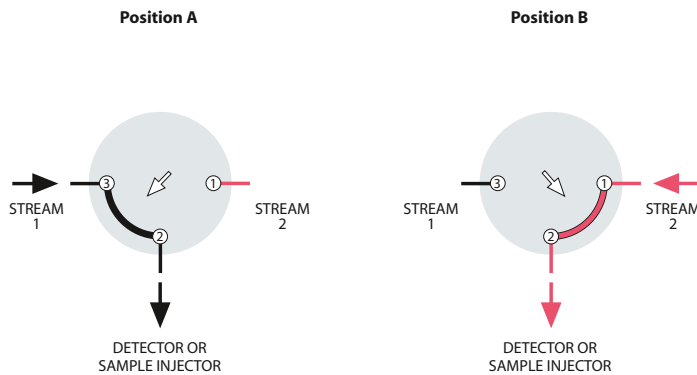

**STREAM SELECTION WITHOUT MAINTAINED FLOW**


This arrangement allows one of two sample points to flow to a sample injector or detector while blocking the other sample point's flow.

VALCO VALVES

4 port switching valve

**DETECTOR SELECTION FROM TWO COLUMNS OR ONE COLUMN AND AUXILIARY CARRIER**

This unique configuration allows analyses of different parts of one analysis with two different detectors, without splitting or multiple injections. For example, fixed gases can be analyzed with a thermal conductivity detector, followed by the analysis of a hydrocarbon fraction with a flame ionization detector.

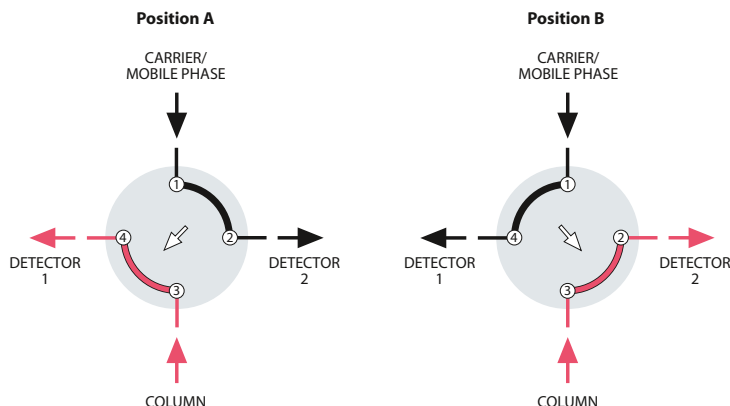


6 port external sample injector

**SAMPLE INJECTION**

With the valve in Position A, sample flows through the external loop while the mobile phase flows directly through to the chromatographic column. When the valve is switched to Position B, the sample contained in the sample loop and valve flow passage is displaced by the mobile phase and is carried onto the column.

*Note:* This is especially critical for partially-filled loops. The flow direction of the mobile phase through the loop should be opposite (backflush) to the flow direction during the loading of the loop.

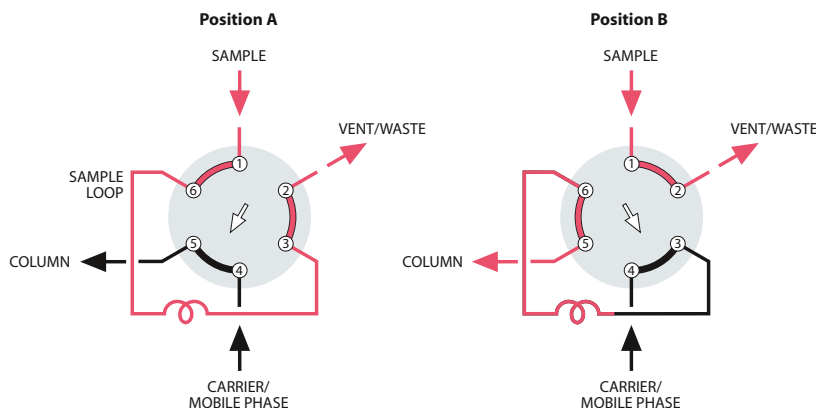


6 port column switching


**BACKFLUSH OF PRECOLUMN TO VENT**

This plumbing scheme allows slower eluting components (end cut) which are not of interest to be backflushed to vent. Often a shorter version of the analytical column is used as the precolumn. Once all the components of interest have entered the main column (at port 2), the valve switches, backflushing the precolumn to vent and reducing analysis time.

*Note:* An auxiliary source of carrier or mobile phase is required for this application.

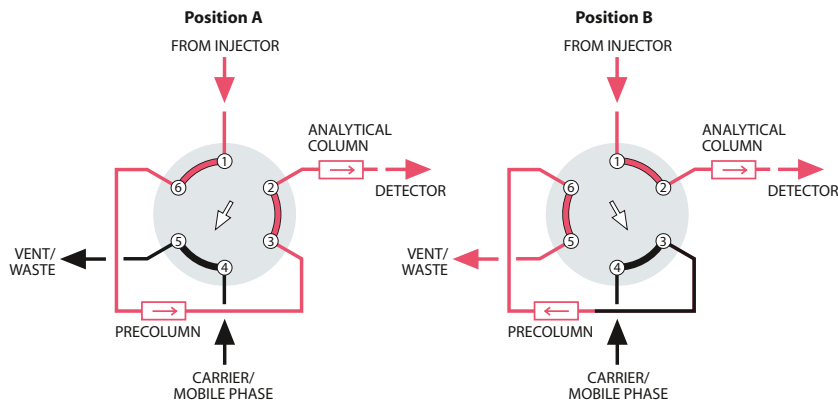

6 port column selection

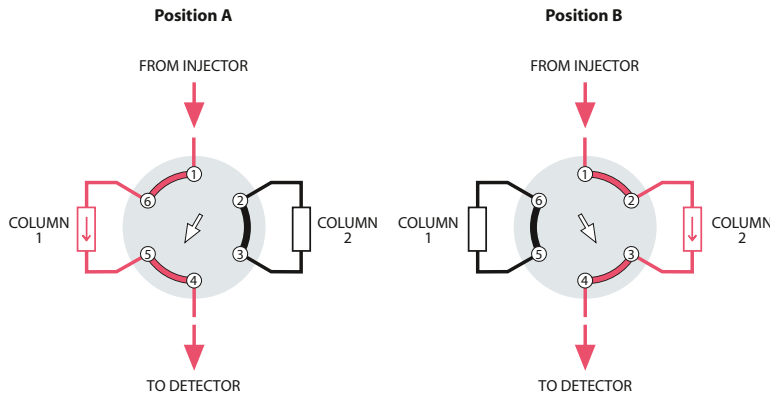


TWO COLUMN SELECTION

When two different columns are required at frequent intervals at similar oven temperatures, a 6 port valve can provide rapid selection of the one to be used. The column not in use is protected by a blanket of inert mobile phase and may be rapidly brought to equilibrium when required.

*Note:* If flow must be maintained to the non-selected column, an 8 or 10 port valve is required.


8 port dual external sample injector

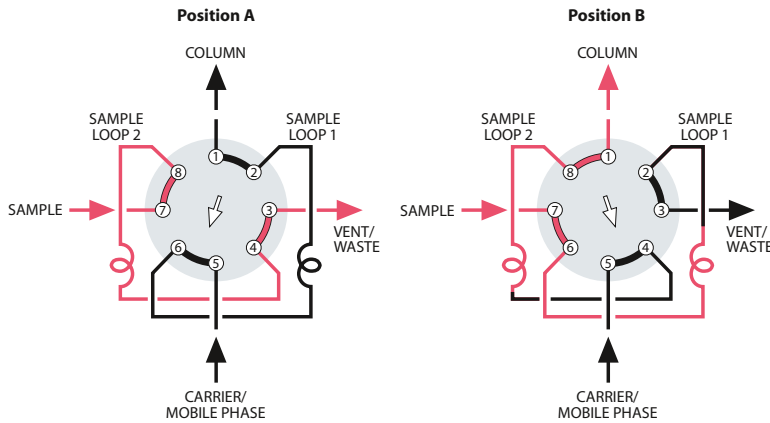

SAME SAMPLE TO DIFFERENT LOOPS

In a dual external sample loop configuration, sample is injected in both positions. In Position A, Loop 2 is loaded while the mobile phase flows through Loop 1 and onto the column. In Position B, the Loop 2 sample is injected into the column and another sample is loaded into Loop 1. When the valve is returned to Position A, the Loop 1 sample is injected onto the column and Loop 2 is reloaded.

8 port sampling/switching

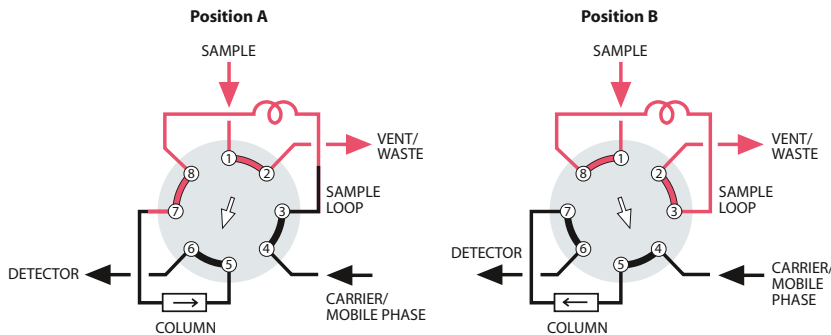

LOOP SAMPLING WITH BACKFLUSH TO DETECTOR

One valve functions as both a sampling and a backflush valve, simplifying operation and reducing cost. When components of interest are detected, the strongly retained components are backflushed and removed from the column without temperature programming.

**VALCO VALVES**


**10 port dual external sampling**

**TWO DIFFERENT SAMPLES TO SAME COLUMN**

A 10 port valve permits alternate injections from the two loops, which may be identical or of different sizes. This technique replaces a 4 port sample selector and a 6 port sample injector.

In Position A, Loop 2 is loaded with sample 2 while the mobile phase flows through Loop 1 and onto the column.

In Position B, the Loop 2 sample is injected onto the column and Loop 1 is loaded with sample 1. When the valve is returned to Position A, the Loop 1 sample is injected onto the column and Loop 2 is reloaded with sample 2.

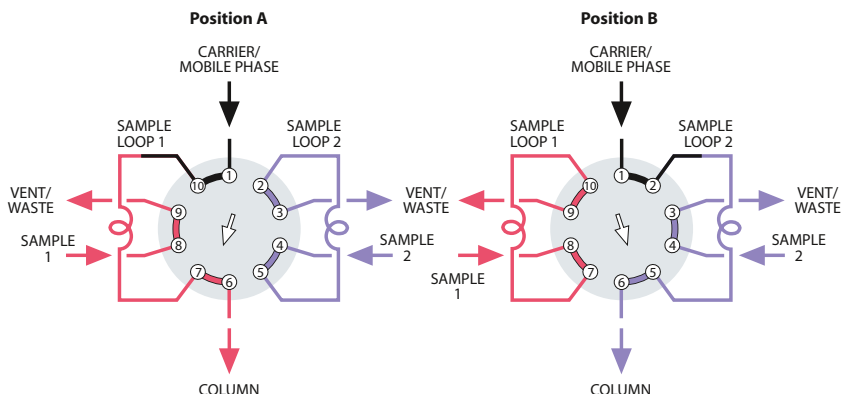


**10 port dual external sampling**

**SIMULTANEOUS INJECTION OF THE SAME SAMPLE ONTO SEPARATE COLUMNS**

In Position A, sample fills the two loops in series. In Position B, the sample is simultaneously injected into two separate flow systems. A single autosampler used with this flowpath can automate two analytical procedures for the same sample.


In an important non-chromatographic application, the roles of carrier and sample are reversed, permitting two different quantities of two different materials to be dispensed together, as in automatic dilution.

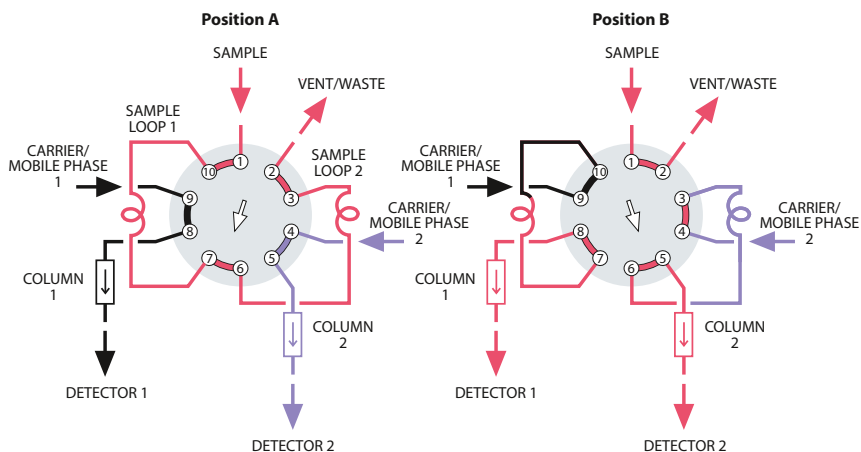


**10 port sampling/switching**

**LOOP SAMPLING WITH BACKFLUSH OF PRE-COLUMN TO VENT**

When components of interest have low boiling points, this plumbing scheme allows "heavy" components with long retention times to be backflushed to waste. After the sample loop is loaded in Position A, the valve is switched to Position B to inject the sample onto column 1. As soon as all components of interest have entered column 2, the valve is switched back to Position A. Column 1 is backflushed to vent during the analysis, reducing the total analysis time.

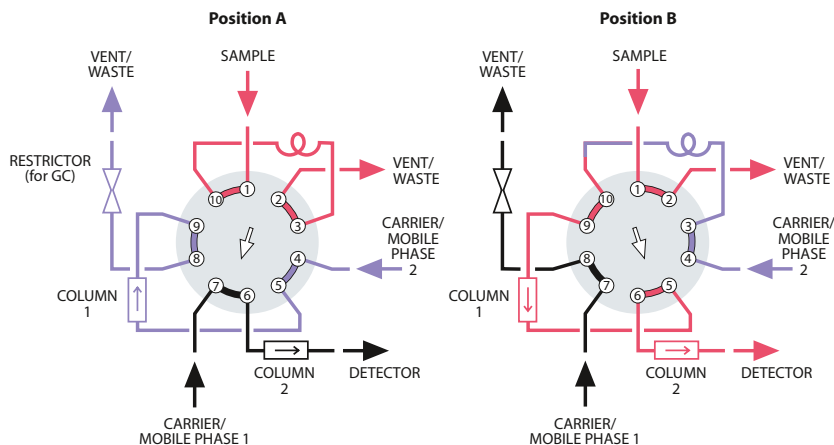


10 port sampling/switching

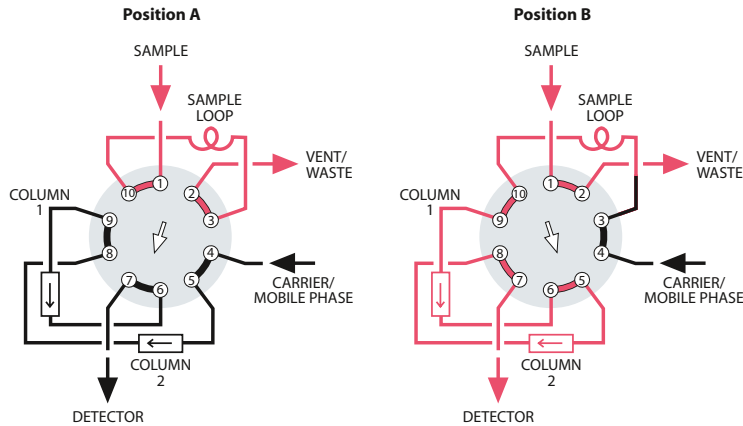

**LOOP SAMPLING WITH TWO COLUMN SEQUENCE REVERSAL**

This is ideal for fixed-gas-from-CO<sub>2</sub> analysis where no "high boilers" are present. Column 1 is packed with a porous polymer and Column 2 with molecular sieve. The sample loop is loaded in Position A. When the valve is switched, the loop contents are sent onto Column 1. As the inorganic gases and methane leave Column 1 and enter Column 2, the valve is returned to Position A, reversing the column sequence. CO<sub>2</sub> now leaves Column 1, becoming the first peak. The inorganics and methane are separated by the molesieve and pass through the porous polymer column to the detector.

10 port column switching

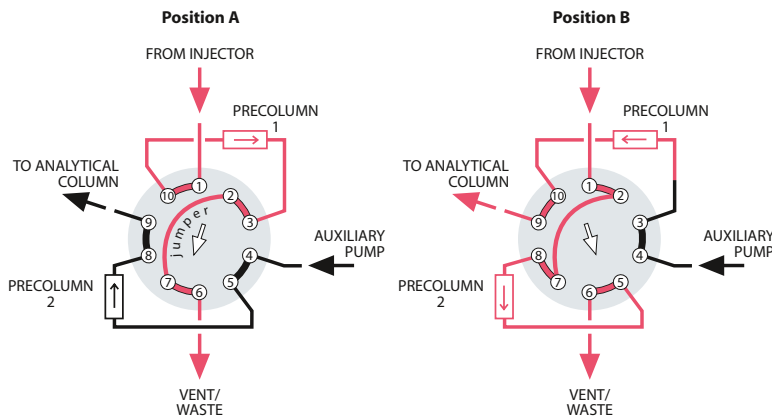


**SAMPLE ENRICHMENT (CLEANUP) USING DUAL PRECOLUMNS**

Sample is injected by a separate injector onto one of two precolumns (stripper). Early eluting components vent at port 6 while components of interest are retained on the stripper. When the valve is switched, a new injection is made onto the second stripper while components retained on the first stripper are backflushed onto the analytical column at port 9.

*Note:* This application requires an auxiliary pump at port 4.

10 port column switching

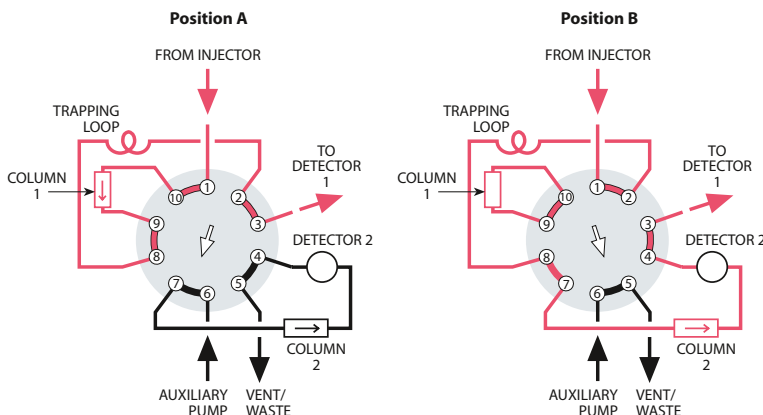


**HEART CUT TRAPPED IN A LOOP AND INJECTED ONTO A SECOND COLUMN**

Sample is injected (using a separate injector) onto an analytical column. Early eluting components (front cut) pass through a trapping loop and are detected (at port 3). The valve is then switched, and the center (or heartcut) which was retained in the trapping loop is injected onto the second column to the detector (at port 4). Late eluting components (end cut) are trapped on the first column. When the valve is switched again, the end cut passes through the trapping loop to the first detector, completing the analysis.

**VALCO VALVES**

## Dead-end flowpath – SD configuration

SD valves select one of 4 to 12 dead-ended streams. The selected stream flows from the outlet to a sample valve, pressure sensor, detector, column, etc. The same flowpath can also be used to direct one stream to a number of outlets in applications such as fraction collection. For an application suggestion, see page 136.

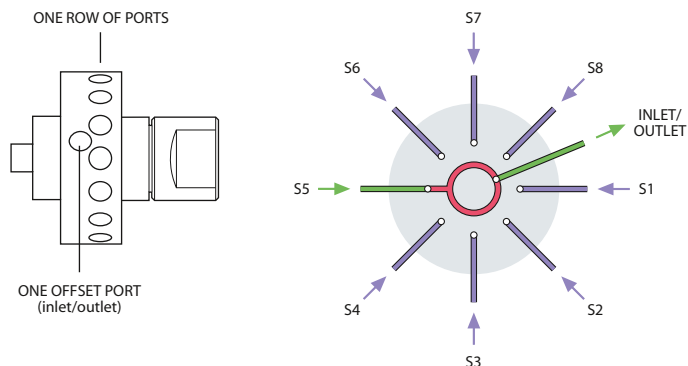

### 1/16" fittings, 0.75 mm ports (.030")

MW Type

**Low pressure**

**SD Dead-end**

**1/16" 0.75 mm**


Includes 2" standoff. Ask about closemount assembly if valve will not be heated.  
Microelectric actuators: 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

**SPECS**  
400 psi gas  
200°C max  
Nitronic 60 body  
Valcon E rotor

**OPTIONS**

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)
- Larger bore available except 16 position

	<b>6 Position</b> <i>Prod No</i>	<b>10 Position</b> <i>Prod No</i>	<b>12 Position</b> <i>Prod No</i>	<b>16 Position</b> <i>Prod No</i>
Manual (not recommended)	2CSD6MWE	2CSD10MWE	2CSD12MWE	2CSD16MWE
With air actuator	A2CSD6MWE	A2CSD10MWE	A2CSD12MWE	A2CSD16MWE
With microelectric actuator	EMT2CSD6MWE	EMT2CSD10MWE	EMT2CSD12MWE	EMT2CSD16MWE
Replacement valve	DCSD6MWE	DCSD10MWE	DCSD12MWE	DCSD16MWE
Replacement rotor	SSACSD6MWE	SSACSD10MWE	SSACSD12MWE	SSACSD16MWE

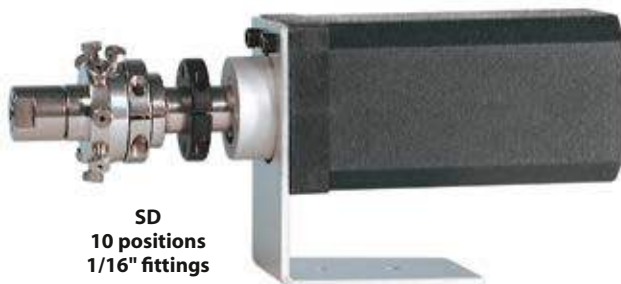

**MORE INFORMATION**

Application..... page 136

Actuators

- Air ..... 196
- Microelectric ..... 192
- Universal ..... 193

Materials

- Metals..... 254-255
- Polymers ..... 256
- Valve rotors..... 257

Mounting hardware

- Closemount ..... 208
- Standoff..... 205

**1/8" fittings, 1.0 mm ports (.040")**

MW Type

**SPECS**

4-8 Positions:  
**400 psi gas**  
**200°C max**  
 10-16 Positions:  
**200 psi gas**  
**200°C max**  
 Nitronic 60 body  
 Valcon E rotor

Includes 2" standoff. Ask about closemount assembly if valve will not be heated.  
 Microelectric actuators: 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

**OPTIONS**

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)
- Larger bore available

Low pressure

SD  
 Dead-end

1/8"

1.0 mm

	<b>6 Position</b> <i>Prod No</i>	<b>10 Position</b> <i>Prod No</i>	<b>12 Position</b> <i>Prod No</i>	<b>16 Position</b> <i>Prod No</i>
Manual (not recommended)	2SD6MWE	2SD10MWE	2SD12MWE	2SD16MWE
With air actuator	A2SD6MWE	A2SD10MWE	A2SD12MWE	A2SD16MWE
With microelectric actuator	EMT2SD6MWE	EMT2SD10MWE	EMT2SD12MWE	EMT2SD16MWE
Replacement valve	DSD6MWE	DSD10MWE	DSD12MWE	DSD16MWE
Replacement rotor	SSASD6MWE	SSASD10MWE	SSASD12MWE	SSASD16MWE

**1/4" fittings, 4.0 mm ports (.156")**

MW Type

**SPECS**

**100 psi gas**  
**75°C max**  
 Nitronic 60 body  
 Valcon E2 rotor

Includes 2" standoff. Ask about closemount assembly if valve will not be heated.  
 Manual version not available.  
 Microelectric actuators: 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

**OPTIONS**

- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)


Low pressure

SD  
 Dead-end

1/4"

4.0 mm


	<b>4 Position</b> <i>Prod No</i>	<b>6 Position</b> <i>Prod No</i>	<b>8 Position</b> <i>Prod No</i>	<b>10 Position</b> <i>Prod No</i>
With air actuator	AH2VLS4MWE2	AH2VLS6MWE2	AH2VLS8MWE2	AH2VLS10MWE2
With microelectric actuator	EMT2VLS4MWE2	EMT2VLS6MWE2	EMT2VLS8MWE2	EMT2VLS10MWE2
Replacement valve	DVLS4MWE2	DVLS6MWE2	DVLS8MWE2	DVLS10MWE2
Replacement rotor	SSAVLS4MWE2	SSAVLS6MWE2	SSAVLS8MWE2	SSAVLS10MWE2

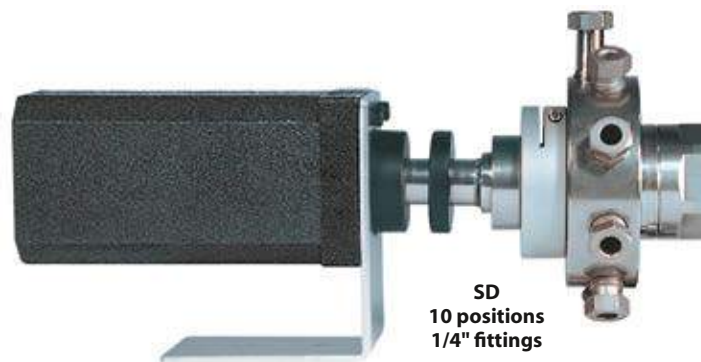

**VALCO VALVES**

### Common outlet flowpath – SC configuration

SC selectors are similar to the SD configuration, except that instead of being dead-ended the non-selected streams flow to a common outlet. For an application suggestion, see page 137.

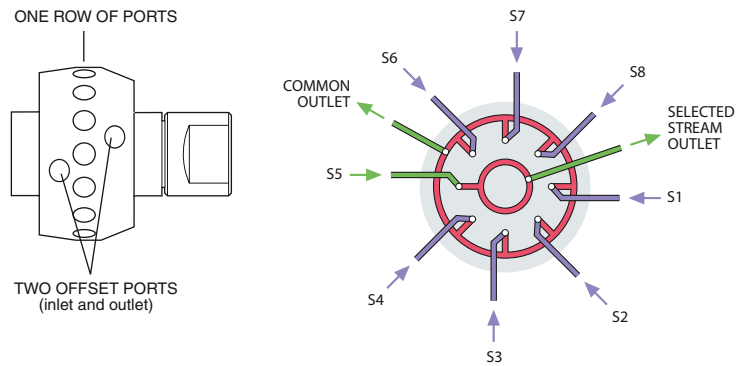

**1/16" fittings, 1.0 mm ports (.040")**

MW Type

**Low pressure**

**SC**  
**Common outlet**

**1/16"** **1.0 mm**


Includes 2" standoff. Ask about closemount assembly if valve will not be heated.  
Microelectric actuators: 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

**SPECS**  
**200 psi gas**  
**200°C max**  
Nitronic 60 body  
Valcon E rotor

**OPTIONS**

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)

	<b>6 Position</b> <i>Prod No</i>	<b>10 Position</b> <i>Prod No</i>	<b>12 Position</b> <i>Prod No</i>	<b>16 Position</b> <i>Prod No</i>
Manual (not recommended)	2CSC6MWE	2CSC10MWE	2CSC12MWE	2CSC16MWE
With air actuator	AH2CSC6MWE	A2CSC10MWE	A2CSC12MWE	A2CSC16MWE
With microelectric actuator	EMT2CSC6MWE	EMT2CSC10MWE	EMT2CSC12MWE	EMT2CSC16MWE
Replacement valve	DCSC6MWE	DCSC10MWE	DCSC12MWE	DCSC16MWE
Replacement rotor	SSACSC6MWE	SSACSC10MWE	SSACSC12MWE	SSACSC16MWE

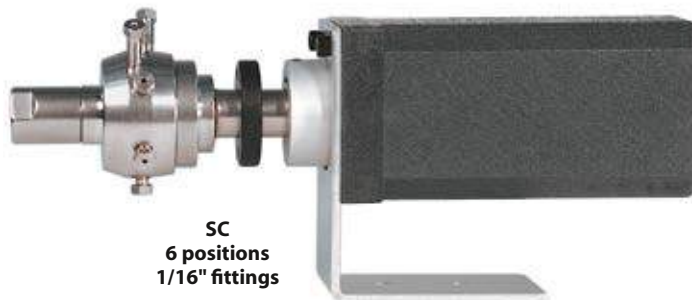

**MORE INFORMATION**

Application. . . . . page 137

Actuators

- Air . . . . . 196
- Microelectric . . . . . 192
- Universal . . . . . 193

Materials

- Metals. . . . . 254-255
- Polymers . . . . . 256
- Valve rotors. . . . . 257

Mounting hardware

- Closemount . . . . . 208
- Standoff. . . . . 205



**1/8" fittings, 1.0 mm ports (.040")**

MW Type

**SPECS**

200 psi gas  
200°C max  
Nitronic 60 body  
Valcon E rotor

Includes 2" standoff. Ask about closemount assembly if valve will not be heated.  
Microelectric actuators: 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

**OPTIONS**

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)
- Larger bore available except 16 position

Low pressure

SC  
Common outlet

1/8" 1.0 mm

	<b>6 Position</b> <i>Prod No</i>	<b>10 Position</b> <i>Prod No</i>	<b>12 Position</b> <i>Prod No</i>	<b>16 Position</b> <i>Prod No</i>
Manual (not recommended)	2SC6MWE	2SC10MWE	2SC12MWE	2SC16MWE
With air actuator	AH2SC6MWE	A2SC10MWE	A2SC12MWE	A2SC16MWE
With microelectric actuator	EMT2SC6MWE	EMT2SC10MWE	EMT2SC12MWE	EMT2SC16MWE
Replacement valve	DSC6MWE	DSC10MWE	DSC12MWE	DSC16MWE
Replacement rotor	SSASC6MWE	SSASC10MWE	SSASC12MWE	SSASC16MWE

**1/4" fittings, 4.0 mm ports (.156")**

MW Type

**SPECS**

100 psi gas  
75°C max  
Nitronic 60 body  
Valcon E2 rotor

Includes 2" standoff. Ask about closemount assembly if valve will not be heated.  
Manual version not available.  
Microelectric actuators: 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

**OPTIONS**

- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)

Low pressure

SC  
Common outlet

1/4" 4.0 mm


	<b>4 Position</b> <i>Prod No</i>	<b>6 Position</b> <i>Prod No</i>	<b>8 Position</b> <i>Prod No</i>
With air actuator	AH2VLSC4MWE2	AH2VLSC6MWE2	AH2VLSC8MWE2
With microelectric actuator	EMT2VLSC4MWE2	EMT2VLSC6MWE2	EMT2VLSC8MWE2
Replacement valve	DVLSC4MWE2	DVLSC6MWE2	DVLSC8MWE2
Replacement rotor	SSAVLSC4MWE2	SSAVLSC6MWE2	SSAVLSC8MWE2



**VALCO VALVES**

## Flow-through flowpath – SF configuration

SD and SC valves select and isolate one of 4 to 16 streams, with the remainder dead-ended in the SD and flowing to a common outlet in the SC. The SF selector is similar, but carries the evolution a step further with the non-selected streams flowing through individual outlets. For an application suggestion, see page 138.

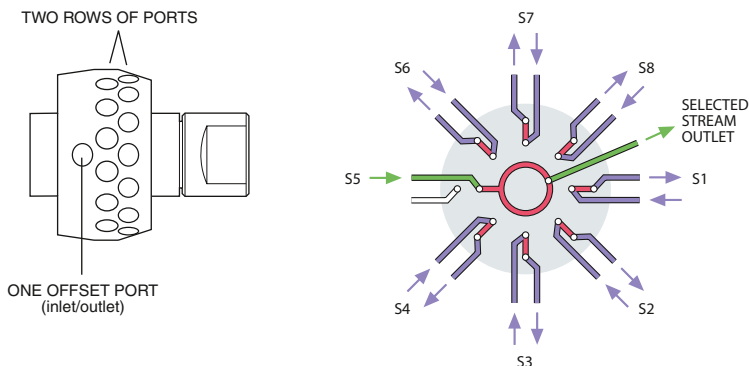

### 1/16" fittings, 1.0 mm ports (.040")

MW Type

**Low pressure**

**SF**  
**Flow-through**

**1/16"** **1.0 mm**


Includes 2" standoff. Ask about closemount assembly if valve will not be heated.  
Microelectric actuators: 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

**SPECS**  
**200 psi gas**  
**200°C max**  
Nitronic 60 body  
Valcon E rotor

**OPTIONS**

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)

	<b>6 Position</b> <i>Prod No</i>	<b>10 Position</b> <i>Prod No</i>	<b>12 Position</b> <i>Prod No</i>	<b>16 Position</b> <i>Prod No</i>
Manual (not recommended)	2CSF6MWE	2CSF10MWE	2CSF12MWE	2CSF16MWE
With air actuator	AH2CSF6MWE	A2CSF10MWE	A2CSF12MWE	A2CSF16MWE
With microelectric actuator	EMT2CSF6MWE	EMT2CSF10MWE	EMT2CSF12MWE	EMT2CSF16MWE
Replacement valve	DCSF6MWE	DCSF10MWE	DCSF12MWE	DCSF16MWE
Replacement rotor	SSACSF6MWE	SSACSF10MWE	SSACSF12MWE	SSACSF16MWE

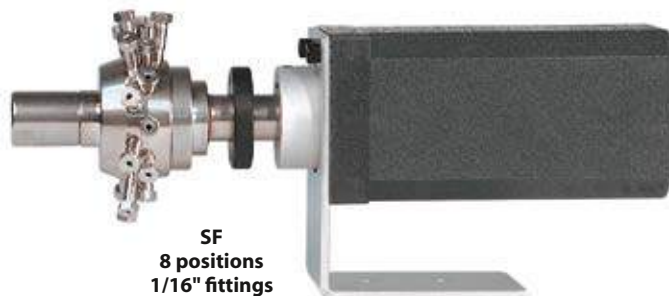

**MORE INFORMATION**

Application..... page 138

Actuators

- Air ..... 196
- Microelectric ..... 192
- Universal ..... 193

Materials

- Metals..... 254-255
- Polymers ..... 256
- Valve rotors..... 257

Mounting hardware

- Closemount ..... 208
- Standoff..... 205

**1/8" fittings, 1.0 mm ports (.040")**

MW Type

**SPECS**

200 psi gas  
200°C max  
Nitronic 60 body  
Valcon E rotor

Includes 2" standoff. Ask about closemount assembly if valve will not be heated.  
Microelectric actuators: 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

**OPTIONS**

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)
- Larger bore available except 16 position

Low pressure

SF  
Flow-through

1/8" 1.0 mm

	<b>6 Position</b> <i>Prod No</i>	<b>10 Position</b> <i>Prod No</i>	<b>12 Position</b> <i>Prod No</i>	<b>16 Position</b> <i>Prod No</i>
Manual (not recommended)	2SF6MWE	2SF10MWE	2SF12MWE	2SF16MWE
With air actuator	AH2SF6MWE	A2SF10MWE	A2SF12MWE	A2SF16MWE
With microelectric actuator	EMT2SF6MWE	EMT2SF10MWE	EMT2SF12MWE	EMT2SF16MWE
Replacement valve	DSF6MWE	DSF10MWE	DSF12MWE	DSF16MWE
Replacement rotor	SSASF6MWE	SSASF10MWE	SSASF12MWE	SSASF16MWE

**1/4" fittings, 4.0 mm ports (.156")**

MW Type

**SPECS**

100 psi gas  
75°C max  
Nitronic 60 body  
Valcon E2 rotor

Includes 2" standoff. Ask about closemount assembly if valve will not be heated.  
Manual version is not available.  
Microelectric actuators: 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

**OPTIONS**


- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)

Low pressure

SF  
Flow-through

1/4" 4.0 mm



	<b>4 Position</b> <i>Prod No</i>	<b>6 Position</b> <i>Prod No</i>	<b>8 Position</b> <i>Prod No</i>
With air actuator	AH2VLSF4MWE2	AH2VLSF6MWE2	AH2VLSF8MWE2
With microelectric actuator	EMT2VLSF4MWE2	EMT2VLSF6MWE2	EMT2VLSF8MWE2
Replacement valve	DVLSF4MWE2	DVLSF6MWE2	DVLSF8MWE2
Replacement rotor	SSAVLSF4MWE2	SSAVLSF6MWE2	SSAVLSF8MWE2

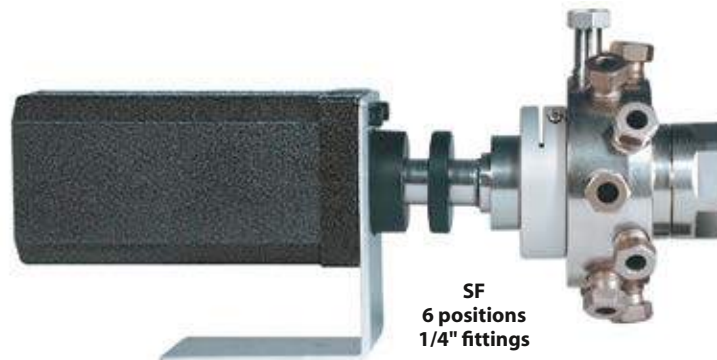

VALCO VALVES

### Trapping flowpath – ST configuration

ST selectors are used for multi-column, multi-sample, or multi-trap operations, and are available for use with 4 to 16 loops, or positions. For an application suggestion, see page 139.

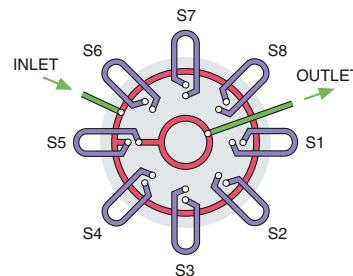

### 1/16" fittings, 0.75 mm ports (.030")

MW Type

Low pressure

ST Trapping

1/16" 0.75 mm

Includes 2" standoff. Ask about closemount assembly if valve will not be heated.  
Microelectric actuators: 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

**SPECS**  
200 psi gas  
200°C max  
Nitronic 60 body  
Valcon E rotor

**OPTIONS**

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)

	6 Position <i>Prod No</i>	10 Position <i>Prod No</i>	12 Position <i>Prod No</i>	16 Position <i>Prod No</i>
Manual (not recommended)	2CST6MWE	2CST10MWE	2CST12MWE	2CST16MWE
With air actuator	AH2CST6MWE	A2CST10MWE	A2CST12MWE	A2CST16MWE
With microelectric actuator	EMT2CST6MWE	EMT2CST10MWE	EMT2CST12MWE	EMT2CST16MWE
Replacement valve	DCST6MWE	DCST10MWE	DCST12MWE	DCST16MWE
Replacement rotor	SSACST6MWE	SSACST10MWE	SSACST12MWE	SSACST16MWE



### 1/16" Stainless steel loops for MW Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately. **Request matched loops when loops will be installed on a single valve.**

Volume	Prod No	Volume	Prod No
50 µl	SL50CSTP	1 ml	SL1KCSTP
100 µl	SL100CSTP	2 ml	SL2KCSTP
250 µl	SL250CSTP	5 ml	SL5KCSTP
500 µl	SL500CSTP	10 ml	SL10KCSTP



**MORE INFORMATION**

Application..... page 139

Actuators

Air ..... 196

Microelectric ..... 192

Universal ..... 193

Materials

Metals..... 254-255

Polymers ..... 256

Valve rotors..... 257

Mounting hardware

Closemount ..... 208

Standoff..... 205

1/8" fittings, 1.0 mm ports (.040")

MW Type

**SPECS**

200 psi gas  
200°C max  
Nitronic 60 body  
Valcon E rotor

Includes 2" standoff. Ask about closemount assembly if valve will not be heated.  
Microelectric actuators: 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

Low pressure

ST  
Trapping

1/8"

1.0 mm

**OPTIONS**

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)
- Larger bore available except 16 position

	6 Position <i>Prod No</i>	10 Position <i>Prod No</i>	12 Position <i>Prod No</i>	16 Position <i>Prod No</i>
Manual (not recommended)	2ST6MWE	2ST10MWE	2ST12MWE	2ST16MWE
With air actuator	AH2ST6MWE	A2ST10MWE	A2ST12MWE	A2ST16MWE
With microelectric actuator	EMT2ST6MWE	EMT2ST10MWE	EMT2ST12MWE	EMT2ST16MWE
Replacement valve	DST6MWE	DST10MWE	DST12MWE	DST16MWE
Replacement rotor	SSAST6MWE	SSAST10MWE	SSAST12MWE	SSAST16MWE

**ABOUT LOOPS**

- Other materials are available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- 1/16" loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.
- 1/8" loops < 100 µl are made from 1/16" OD tubing with brazed or welded 1/8" tube ends.
- Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.



1/8" Stainless steel loops for MW Type valves


Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately. **Request matched loops when loops will be installed on a single valve.**

Volume	Prod No	Volume	Prod No
100 µl	SL100STP	1 ml	SL1KSTP
250 µl	SL250STP	2 ml	SL2KSTP
500 µl	SL500STP	5 ml	SL5KSTP
		10 ml	SL10KSTP

**VALCO VALVES**

## Trapping/flow-through flowpath – STF configuration

The STF selector is a variation of the ST flowpath, with the single difference that the non-selected streams are returned to their own vents or sources rather than being dead-ended or trapped as they are in the standard ST configuration. For an application suggestion, see page 140.

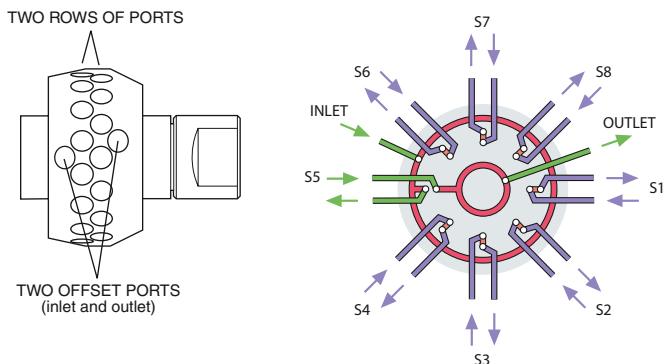

### 1/16" fittings, 0.75 mm ports (.030")

MW Type

<b>Low pressure</b>	Includes 2" standoff. Ask about closemount assembly if valve will not be heated. Microelectric actuators: 24 VDC (includes a 110/230 VAC to 24 VDC power supply)	<b>SPECS</b> <b>200 psi gas</b> <b>200°C max</b> Nitronic 60 body Valcon E rotor
<b>STF</b> <b>Trap/ flow-throw</b>		
<b>1/16"</b>		

**OPTIONS**

- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)

	<b>6 Position</b> <i>Prod No</i>	<b>10 Position</b> <i>Prod No</i>	<b>12 Position</b> <i>Prod No</i>	<b>16 Position</b> <i>Prod No</i>
Manual (not recommended)	2CSTF6MWE	2CSTF10MWE	2CSTF12MWE	2CSTF16MWE
With air actuator	AH2CSTF6MWE	A2CSTF10MWE	A2CSTF12MWE	A2CSTF16MWE
With microelectric actuator	EMT2CSTF6MWE	EMT2CSTF10MWE	EMT2CSTF12MWE	EMT2CSTF16MWE
Replacement valve	DCSTF6MWE	DCSTF10MWE	DCSTF12MWE	DCSTF16MWE
Replacement rotor	SSACSTF6MWE	SSACSTF10MWE	SSACSTF12MWE	SSACSTF16MWE

**MORE INFORMATION**

Application..... page 140

Actuators

- Air ..... 196
- Microelectric ..... 192
- Universal ..... 193

Materials

- Metals..... 254-255
- Polymers ..... 256
- Valve rotors..... 257

Mounting hardware

- Closemount ..... 208
- Standoff..... 205

**1/8" fittings, 1.0 mm ports (.040")**

MWType

**SPECS**

200 psi gas  
200°C max  
Nitronic 60 body  
Valcon E rotor

Includes 2" standoff. Ask about closemount assembly if valve will not be heated.  
Microelectric actuators: 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

**OPTIONS**


- 4 and 8 positions available
- 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see pages 254-255)
- Larger bore available except 16 position

Low pressure

STF  
Trap/ flow-throw

1/8" 1.0 mm



	<b>6 Position</b> <i>Prod No</i>	<b>10 Position</b> <i>Prod No</i>	<b>12 Position</b> <i>Prod No</i>	<b>16 Position</b> <i>Prod No</i>
Manual (not recommended)	2STF6MWE	2STF10MWE	2STF12MWE	2STF16MWE
With air actuator	AH2STF6MWE	A2STF10MWE	A2STF12MWE	A2STF16MWE
With microelectric actuator	EMT2STF6MWE	EMT2STF10MWE	EMT2STF12MWE	EMT2STF16MWE
Replacement valve	DSTF6MWE	DSTF10MWE	DSTF12MWE	DSTF16MWE
Replacement rotor	SSASTF6MWE	SSASTF10MWE	SSASTF12MWE	SSASTF16MWE

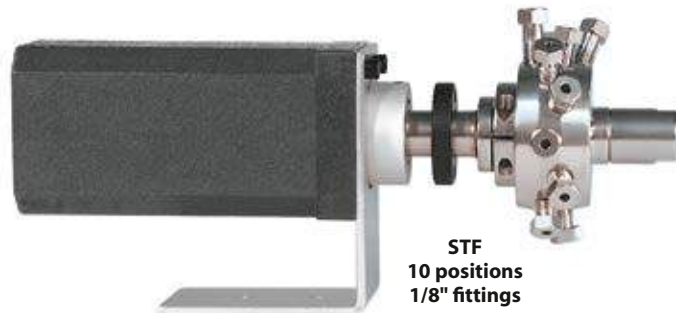

**VALCO VALVES**

## Dead-end flowpath – SD configuration

SD valves select one of 4 to 12 dead-ended streams. The selected stream flows from the valve outlet to a sample valve, pressure sensor, detector, column, etc. This configuration may also be used to direct one stream to a number of outlets for applications such as fraction collection. For an application suggestion, see page 141.

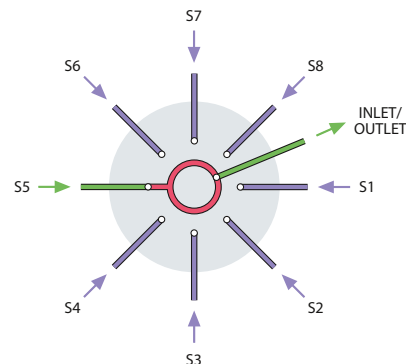

### 1/16" fittings, 0.4 mm ports (.016")

*UW Type*

**5,000 psi**

**SD Dead-end**

**1/16" 0.40 mm**

Microelectric actuators: 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

**OPTIONS**

- 8 and 12 positions available
- 2", 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see p. 254-255)
- Low pressure, high temperature versions available
- Larger bore available except 10 and 12 positions

**SPECS**

**5000 psi liq**  
**75°C max**  
 Nitronic 60 body  
 Valcon E rotor

	<b>4 Position</b> <i>Prod No</i>	<b>6 Position</b> <i>Prod No</i>	<b>10 Position</b> <i>Prod No</i>
Manual (not recommended)	CSD4UW	CSD6UW	CSD10UW
With air actuator	ACSD4UW	ACSD6UW	ACSD10UW
With microelectric actuator	EMTCS4UW	EMTCS6UW	EMTCS10UW
Replacement valve	DCSD4UW	DCSD6UW	DCSD10UW
Replacement rotor	SSACSD4UW	SSACSD6UW	SSACSD10UW

### 1/8" fittings, 0.75 mm ports (.030")

*UW Type*

**5,000 psi**

**SD Dead-end**

**1/8" 0.75 mm**

Microelectric actuators: 24 VDC (includes a 110/230 VAC to 24 VDC power supply)

**OPTIONS**

- 2", 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see p. 254-255)
- Low pressure, high temperature versions available
- Larger bore available except 8 position

**SPECS**

**5000 psi liq**  
**75°C max**  
 Nitronic 60 body  
 Valcon E rotor

	<b>4 Position</b> <i>Prod No</i>	<b>6 Position</b> <i>Prod No</i>	<b>8 Position</b> <i>Prod No</i>
Manual (not recommended)	SD4UW	SD6UW	SD8UW
With air actuator	ASD4UW	ASD6UW	ASD8UW
With microelectric actuator	EMTSD4UW	EMTSD6UW	EMTSD8UW
Replacement valve	DSD4UW	DSD6UW	DSD8UW
Replacement rotor	SSASD4UW	SSASD6UW	SSASD8UW




**SD**  
**6 positions**  
**1/8" fittings**



## Both column ends selected – ST configuration

ST selectors are used for multi-column, multi-sample, or multi-trap operations. This valve can be used between an injector and detector to permit manual or automated HPLC column selection. For an application suggestion, see page 141.

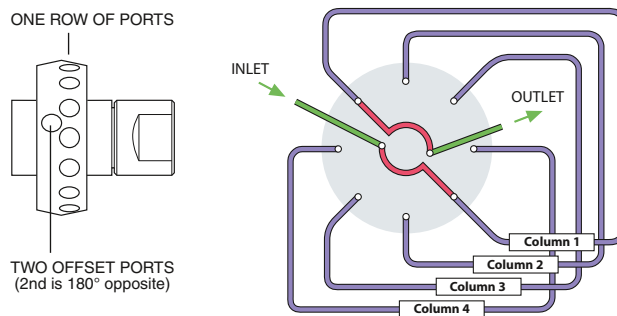

### 1/16" fittings, 0.4 mm ports (.016")

UW Type

#### SPECS

5000 psi liq  
75°C max  
Nitronic 60 body  
Valcon E rotor

Manual versions are not available.

Microelectric actuators: 24 VDC (includes a 110/230 VAC to 24 VDC power supply).

#### OPTIONS

- 2", 3", 4", and 6" standoffs
- Materials: Hastelloy C, Inconel 600, Monel 400, Nickel 200, Nitronic 50, Titanium (see p.254-255)
- Low pressure, high temperature versions available. (Consult factory.)

5,000 psi

ST Trapping

1/16" 0.4 mm

#### 4 Columns or Loops

Prod No

ACST4UW

EMTCST4UW

DCST4UW

SSACST4UW

#### 6 Columns or Loops

Prod No

ACST6UW

EMTCST6UW

DCST6UW

SSACST6UW

With air actuator  
With microelectric actuator

Replacement valve  
Replacement rotor



ST  
4 position  
1/16" fittings

#### ABOUT LOOPS

- Other materials are available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, PEEK, PTFE, and Titanium
- Loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.
- Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.



### 1/16" Stainless steel loops for UW Type valves

Each stainless steel loop includes two stainless nuts and two stainless ferrules. Order special fittings separately. **Request matched loops when loops will be installed on a single valve.**

Volume	Prod No	Volume	Prod No
10 µl	SL10CSTUW	250 µl	SL250CSTUW
15 µl	SL15CSTUW	500 µl	SL500CSTUW
20 µl	SL20CSTUW	1 ml	SL1KCSTUW
25 µl	SL25CSTUW	2 ml	SL2KCSTUW
50 µl	SL50CSTUW	5 ml	SL5KCSTUW
100 µl	SL100CSTUW	10 ml	SL10KCSTUW

SD flowpath — low pressure


**STREAM SELECTION WITH DEAD-ENDED STREAMS**

SD valves select one of 4 to 16 dead-ended streams. The selected stream flows from the valve outlet to a sample valve, pressure sensor, detector, column, etc. The same configuration may also be used to direct one stream to a number of outlets for applications such as fraction collection.

This example illustrates automated sampling of non-pressurized containers.

**1** A vacuum pump is used to move sample from the containers to a 6 port sampling valve. **2** The 3 port valve is used to block the vacuum flow through the sampling valve to allow the sample within the loop to equilibrate at atmospheric pressure. **3** The 6 port valve is then switched, injecting the sample. This method eliminates any possible effect from pressure differences among the containers, providing accurate and repeatable results. All three valves can be automated with air or electric actuators for unattended operation.



The SD flowpath isolates the unselected sample streams, but the potential exists for extraneous sample or contaminants to be in the lines when containers are first connected. To avoid problems, either prepurge each line or allow sufficient sampling time for the line to purge prior to injection.

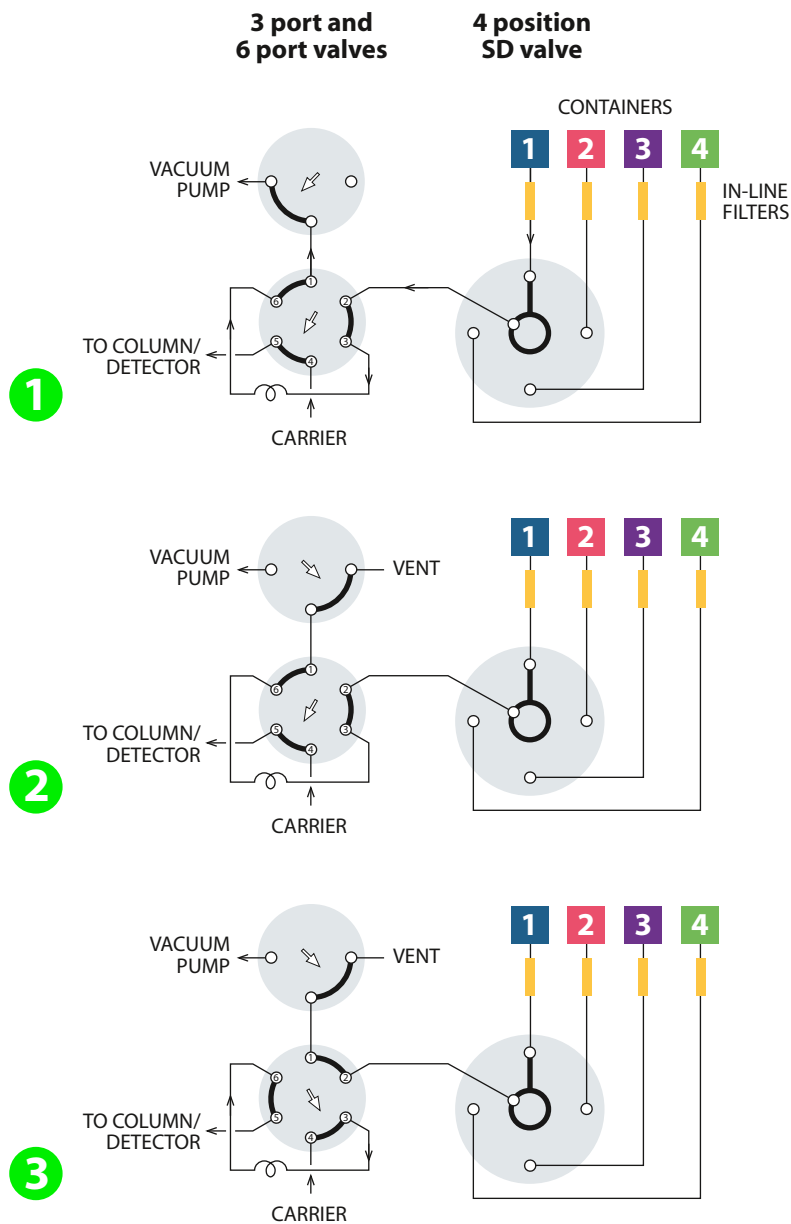

**MORE INFORMATION**

SD prices  
 Low pressure . . . 124-125  
 High pressure . . . . . 134  
 Application  
 High pressure SD . . . 141

## SC flowpath

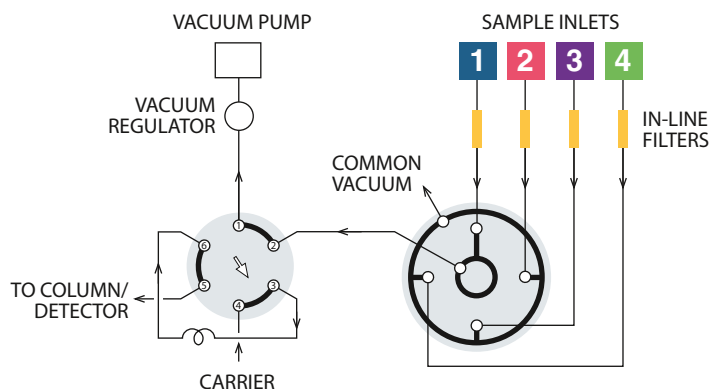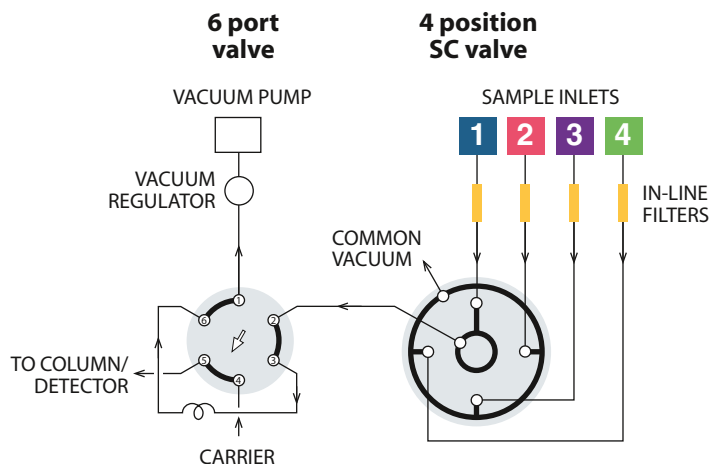

## STREAM SELECTION WITH CONTINUOUS FLOW TO A COMMON OUTLET

SC selectors are similar to the SD configuration, except that instead of being dead-ended the non-selected streams flow to a common outlet. They are also available in 4, 6, 8, 10, 12, or 16 position versions.

The SC configuration is ideal for air quality monitoring, illustrated in this example.

The application is essentially the same as the one shown for the SD selectors on the previous page, except that the non-selected streams are continuously pulled through the valve, insuring that the most current sample will be provided as each point is selected for analysis. 1 The sample loop on the 6 port valve is loaded from Stream 1. 2 The 6 port valve is switched, injecting the sample. Both valves can be automated with air or electric actuators for unattended operation.

## TECH TIP

Because the most common cause of valve failure is stray particulates entering the valve, we strongly recommend the use of in-line filters at sample entry points.

Our ZUFR filters feature inexpensive and easily replaceable low pressure drop filter screens (2 or 10 micron). The filters are available in 1/16", 1/8", and 1/4" standard, reducing, and bulkhead versions.

Filters ..... pages 50-52

## MORE INFORMATION

Actuators

Air ..... page 196

Mod. universal ..... 194

Universal ..... 193

SC prices ..... 126-127

SF flowpath


**STREAM SELECTION WITH CONTINUOUS FLOW TO INDIVIDUAL OUTLETS**

SD and SC valves select and isolate one of 4 to 16 streams, with the remainder dead-ended in the SD and flowing to a common outlet in the SC. The SF selector is similar, but carries the evolution a step further with the non-selected streams flowing through individual outlets.

This is the ideal solution when reactions or process streams with differing upstream pressures must be analyzed, and can also provide independent containment of toxic or noxious streams. An SF selector together with a 6 port sampling valve and pneumatic or electric actuators comprise a complete sampling system for the automated analysis of up to 16 sample points.

Note that streams 1 and 4 are vented while streams 2 and 3 are returned to their sources in this example.

Mode 1 shows sample loading from stream 4, while mode 2 shows sample injected onto the analytical column.

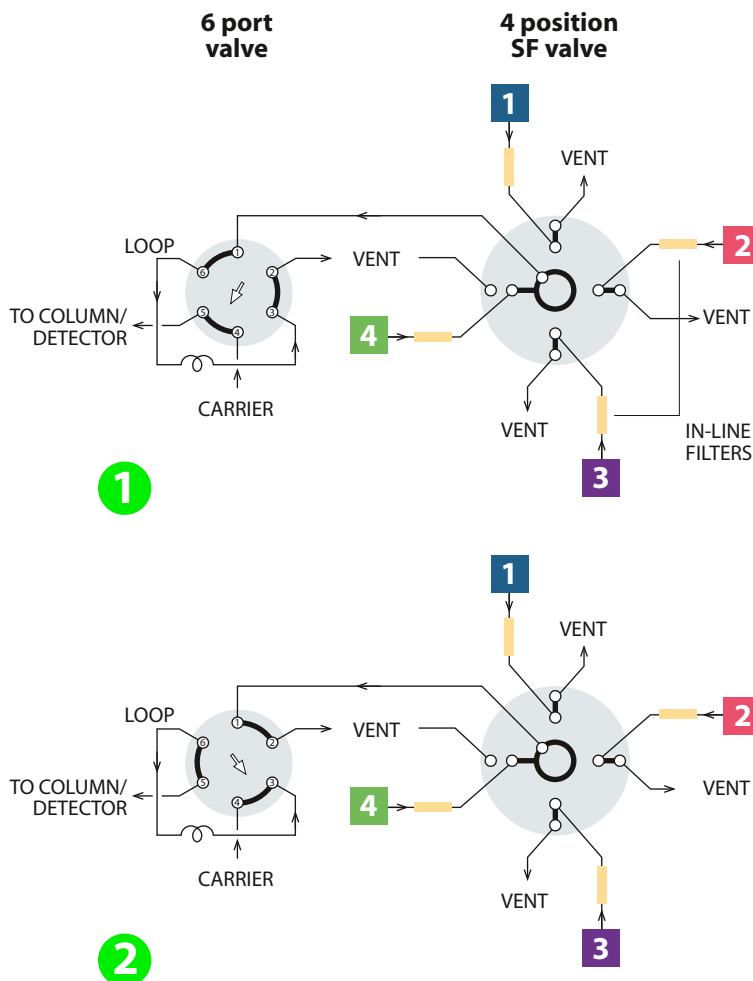


**MORE INFORMATION**

- Actuators
- Air ..... page 196
- Mod.universal ..... 194
- Universal ..... 193

SF prices ..... 128-129

## ST flowpath — low pressure

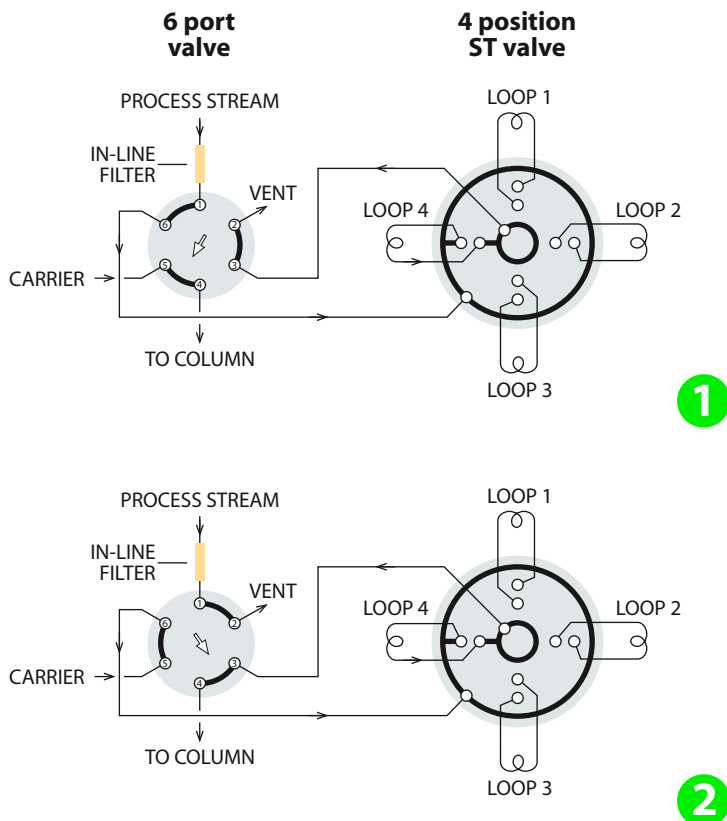

## SAMPLE TRAPPING APPLICATIONS FOR 4 TO 16 STREAMS

ST selectors are used for multi-column, multi-sample, or multi-trap operations. The ST configuration is available in both MW and UW type designs.

A typical application, shown here, is the collection of fractions at timed intervals for analysis at a later time. Valves can be ordered with matched loops already installed.

In this example, the 6 port valve shown is used to select between **1** collection/trapping and **2** analysis/desorption. Both valves can be supplied with pneumatic or electric actuators to automate these functions.

**TECH TIP**

Because the most common cause of valve failure is stray particulates entering the valve, we strongly recommend the use of in-line filters at sample entry points.

Our ZUFR filters feature inexpensive and easily replaceable low pressure drop filter screens (2 or 10 micron). The filters are available in 1/16", 1/8", and 1/4" standard, reducing, and bulkhead versions.

Filters . . . . . pages 50-52

**MORE INFORMATION**

ST prices

Low pressure . . 130-131

High pressure . . . . .135

Application


High pressure ST . . .141

STF flowpath

**SAMPLE TRAPPING WITH CONTINUOUS FLOW TO INDIVIDUAL OUTLETS**

The STF selector is a variation of the ST flowpath, with the single difference that the non-selected streams are returned to their own vents or sources rather than being dead-ended or trapped as they are in the standard ST configuration. This is ideal for reactor processes in which removal of substantial amounts of sample would upset the equilibrium within the reactor, or if the stream is toxic or noxious and must be isolated.

An STF selector on an air or electric actuator along with a similarly equipped 6 port valve comprise a complete sampling system for the automated analysis of up to 16 sampling points.

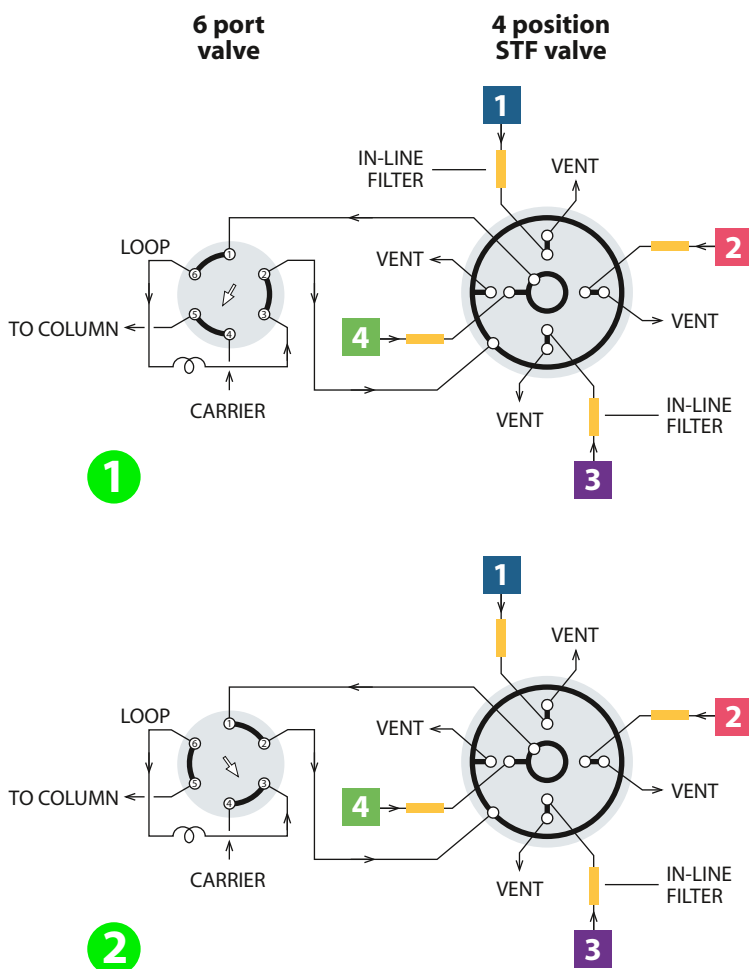

**TECH TIP**

Because the most common cause of valve failure is stray particulates entering the valve, we strongly recommend the use of in-line filters at sample entry points.

Our ZUFR filters feature inexpensive and easily replaceable low pressure drop filter screens (2 or 10 micron).

The filters are available in 1/16", 1/8", and 1/4" standard, reducing, and bulkhead versions.


**MORE INFORMATION**

Actuators  
 Air ..... page 196  
 Mod. universal ..... 194  
 Universal ..... 193

STF prices ..... 132-133


Filters ..... pages 50-52

## SD flowpath — high pressure

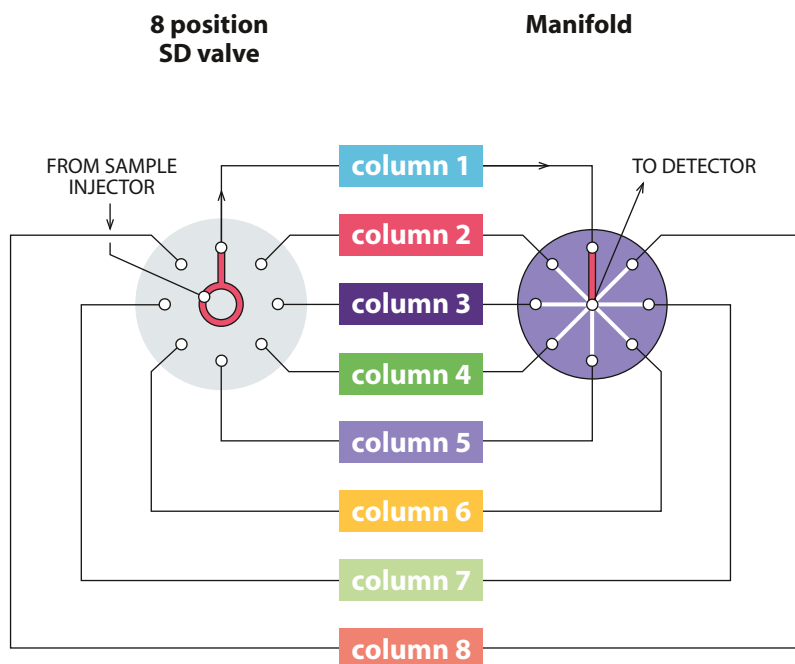**HPLC COLUMN SELECTION FOR UP TO 10 COLUMNS**

This example illustrates an SD (UW type) selector used for HPLC column selection. This allows multiple columns to be installed permanently in the system, eliminating instrument downtime and leakage potential resulting from having to change columns repeatedly. The SDUW valve selects only column inlets – the column outlets are connected to the detector via a low-volume manifold. The manifold is sold separately.

## ST flowpath — high pressure

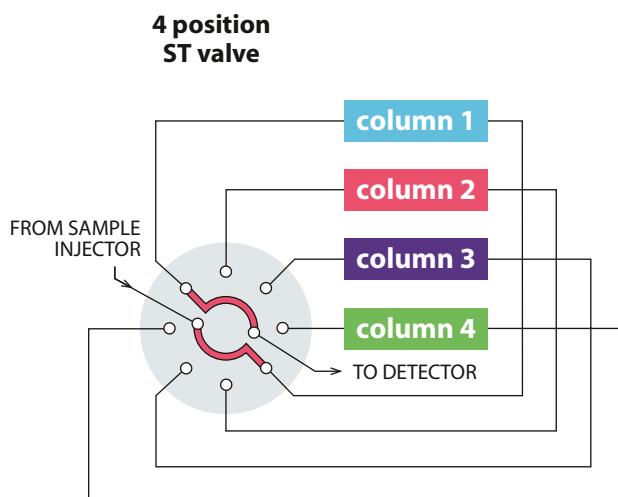**HPLC COLUMN SELECTION FOR 4 OR 6 COLUMNS**

Up to 6 HPLC columns can be rapidly accessed by column selection valves, eliminating the instrument downtime involved in exchanging columns and the leakage due to repeated changing of tubing fittings. The columns are installed as a part of the loop system, as shown in this drawing. A 6 position valve can support 6 columns.

**MORE INFORMATION**

## Prices

SD high pressure ... 134

ST high pressure... 135

## Application

Low pressure SD... 136

Low pressure ST... 139

Manifolds ..... 33

# Diaphragm valves

FOR CONTINUOUS AUTOMATED OPERATION


- Only 35 mm (1.375") in diameter
- >1,000,000 cycle lifetime
- Three configurations – 6 port, 10 port, and 4 port internal sample
- Built in actuator
- 1/16" or 1/32" Valco zero dead volume fittings

The VICI mini diaphragm valve is designed for trouble-free use in applications requiring minimal maintenance and maximum lifetime, making it an ideal choice for the process industry, automated lab analyzers, or continuous-monitoring environmental analyses.

## Design

The mini diaphragm valve consists of plungers and ports arranged in a circular pattern, with the plungers

controlled by the reciprocation action of two air actuated pistons. Maintenance procedures are greatly simplified, since a single screw holds the valve together and locating pins ensure proper alignment. Extremely long lifetime, very short actuation time (10 milliseconds), minimum internal dead volume, and reliability have made this type of valve very successful in process gas chromatography for both sample injection and column switching.

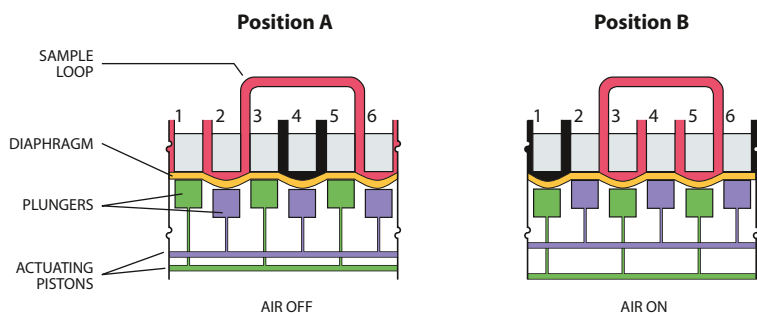

## TECH TIP

For optimal zero dead volume connections, make sure your tubing meets the best industry standards. OD tolerance should be nominal dimension  $\pm .002$ ".

Fractional dimension	Nominal dimension
1/32"	.031
1/16"	.062
1/8"	.125
1/4"	.250
3/8"	.375
1/2"	.500





## Dimensions

Valve diameter is 35 mm (1.375"), height is 42 mm (1.625"), and weight is less than 255 g (9 oz).

## Valve Fittings

The valve cap has Valco 1/32" or 1/16" ZDV fitting details – a rugged design which allows easy replacement of tubing or of the valve itself.

Standard bore size is 0.40 mm (.016"). Optional bore sizes are 0.25 mm (.010") and 0.75 mm (.030").

## Lifetime

Diaphragm valve lifetime can exceed 1,000,000 cycles at ambient temperature or 500,000 cycles at 175°C.

## Actuation

Actuator air (50-60 psi) is supplied to a side port with 10-32 female threads, permitting use of a variety of compression or barbed fittings. A 3-way solenoid is required for actuation. (See page 198.)

## Optional Mounting Kit

The mounting kit consists of a ring which is mounted on a flat surface. A slot allows the ring to be tightened around the collar of the valve.

## Temperature/Pressure Specifications

Diaphragm valves can be operated at temperatures up to 200°C, at 300 psi. The standard valve is for applications in which the sample is above ambient pressure. An optional version works with subambient pressures, such as when the sample is "pulled" through the valve by a vacuum pump.

## Materials of Construction

The cap is Nitronic 60 stainless (optional Hastelloy C or Type 316 stainless), with remaining metal parts of 300 series stainless. The diaphragm is formed from a specialized polyimide.

## Purge Option

Purging improves sensitivity when a diaphragm valve is used in conjunction with a VICI Pulsed Discharge Detector, for example, since air cannot diffuse into the flow path.

The optional purge ring, easy to install on any VICI diaphragm valve, is equipped with two 1/16" ports for the purge gas inlet and outlet.



**Purge ring**  
Page 144

### ACTUATION

A 3-way solenoid is required for actuation.  
3-way solenoid ... p 198

### MORE INFORMATION

#### Materials

Metals..... 254-255

#### Valve descriptions

Cheminert injectors and valves ..... 146-151

Cheminert selectors .. 146, 152-153

Valco injectors and valves ..... 98-101

Valco selectors .. 102-103

#### Valve prices

Cheminert

HPLC..... 154-165

Low pressure .. 166-169

Selectors ..... 172-179

Valco

GC ..... 104-113

HPLC..... 114-118

Selectors ..... 124-135

## Ordering information

### DIAPHRAGM VALVES

#### Diaphragm valves, 1/32" fittings, 0.25 mm ports (.010")

Process GC

1/32" 0.25 mm

Includes stainless steel nuts and ferrules.  
A 3-way solenoid is required for actuation. Order separately on page 198.



**4 port**  
**.5 µl internal sample**  
Prod No  
DV12-1114-.5



**4 port**  
**1 µl internal sample**  
Prod No  
DV12-1114-1



**6 port**  
**sampling/switching**  
Prod No  
DV12-1116



**10 port**  
**multifunctional**  
Prod No  
DV12-1110

#### SPECS

Internal sample:  
**750 psi liq**  
**50°C max**  
Sampling/switching:  
**300 psi gas**  
**175°C max**  
Sample:  
**Above ambient pressure\***  
Nitronic 60 valve body  
Polyimide diaphragm  
\* For vacuum applications,  
contact the factory.

#### Diaphragm valves, 1/16" fittings, 0.40 mm ports (.016")

Process GC

1/16" 0.40 mm

Includes stainless steel nuts and ferrules.  
A 3-way solenoid is required for actuation. Order separately on page 198.

**4 port**  
**.5 µl internal sample**  
Prod No  
DV22-2114-.5

**4 port**  
**1 µl internal sample**  
Prod No  
DV22-2114-1

**6 port**  
**sampling/switching**  
Prod No  
DV22-2116

**10 port**  
**multifunctional**  
Prod No  
DV22-2110

#### SPECS

Internal sample:  
**750 psi liq**  
**50°C max**  
Sampling/switching:  
**300 psi gas**  
**175°C max**  
Sample:  
**Above ambient pressure\***  
Nitronic 60 valve body  
Polyimide diaphragm  
\* For vacuum applications,  
contact the factory.

#### Diaphragm valves, 1/16" fittings, 0.75 mm ports (.030")

Process GC

1/16" 0.75 mm

Includes stainless steel nuts and ferrules.  
A 3-way solenoid is required for actuation. Order separately on page 198.

**4 port**  
**.5 µl internal sample**  
Prod No  
DV22-3114-.5

**4 port**  
**1 µl internal sample**  
Prod No  
DV22-3114-1

**6 port**  
**sampling/switching**  
Prod No  
DV22-3116

**10 port**  
**multifunctional**  
Prod No  
DV22-3110

#### SPECS

Internal sample:  
**750 psi liq**  
**50°C max**  
Sampling/switching:  
**300 psi gas**  
**175°C max**  
Sample:  
**Above ambient pressure\***  
Nitronic 60 valve body  
Polyimide diaphragm  
\* For vacuum applications,  
contact the factory.

#### 1/16" sample loops

Each stainless steel loop includes two 1/16" stainless nuts and ferrules.

Volume	Prod No
2 µl	CSL2
5 µl	CSL5
10 µl	CSL10
20 µl	CSL20
50 µl	CSL50
100 µl	CSL100
250 µl	CSL250
500 µl	CSL500
1 ml	CSL1K
2 ml	CSL2K
5 ml	CSL5K
10 ml	CSL10K



#### 1/32" sample loops

Each stainless steel loop includes two 1/32" stainless steel nuts and ferrules.

Volume	Prod No
1 µl	CSLN1K
2 µl	CSLN2K
5 µl	CSLN5K
10 µl	CSLN10K



#### Replacement diaphragms

	Prod No
Polyimide diaphragm	
.010" bore	DV22-21D
.016" bore	DV22-21D
.030" bore	DV22-31D
PTFE diaphragm	DV22-22D



**6 port**  
**1/16" fittings**

#### Accessories

	Prod No
Purge ring	DV22-PURGE
Mounting kit	DVBRKIT


#### OPTIONS

■ Materials:  
Hastelloy C  
Type 316 stainless  
For more information,  
refer to the metals discussion on page 254-5.

#### MORE INFORMATION

More applications . . . pp 119-123  
3-way solenoid . . . . . 198


4 port sample injector

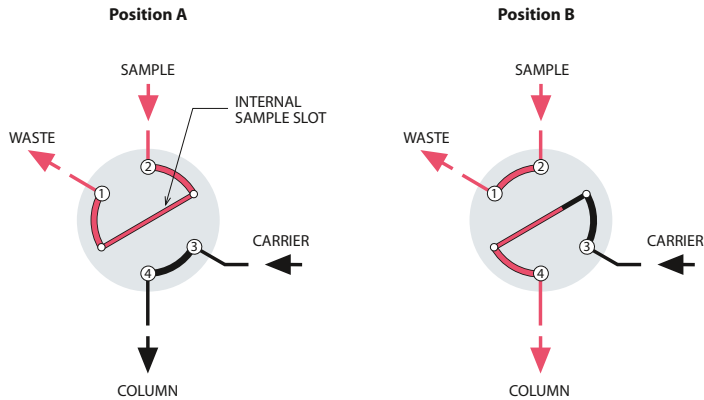

**MICROVOLUME SAMPLE INJECTION**

The internal sample (fixed volume) flowpath is used when very small sample volumes are required. The sample size is determined by a passage engraved on the valve cap, allowing precise, repeatable injections. In Position A, the sample flows through the sample passage while the carrier flows through to the column. In Position B, the sample passage is in line with the column and the carrier injects the contents of the sample passage into the column.

6 port sample injector

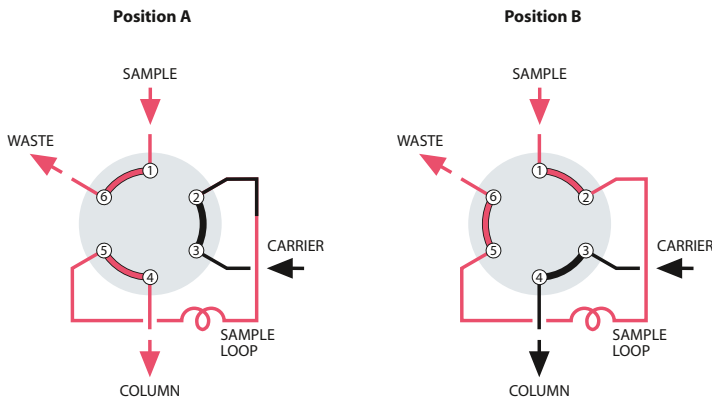


**SAMPLE INJECTION**

With the valve in Position A, sample flows through the external loop while the carrier flows directly through to the column. When the valve is switched to Position B, the sample contained in the sample loop and valve flow passage is injected into the column.

**MORE INFORMATION**

More applications .....pages 120-121

10 port sample injector

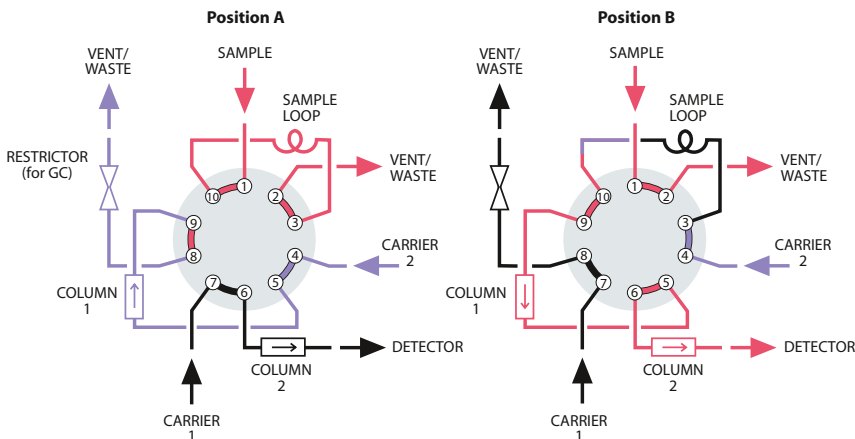

**LOOP SAMPLING WITH BACKFLUSH OF PRE-COLUMN TO VENT**

When components of interest are low boiling, this plumbing scheme allows “heavy” components with long retention times to be backflushed to waste. After the sample loop is loaded in Position A, the valve is switched to Position B to inject the sample into column 1. As soon as all components of interest have entered column 2, the valve is switched back to Position A. Column 1 is backflushed to vent during the analysis, reducing the total analysis time.

**MORE INFORMATION**

More applications .....pages 122-123

# Cheminert® valves

FOR INJECTION, SWITCHING, AND STREAM SELECTION


- Pressure ratings from 100 psi to 20,000 psi liq
- Inert, biocompatible construction
- Easy field service
- Automated operation – pneumatic or electric
- 4, 6, 8, and 10 port and internal sample two position models
- Stream selection versions with up to 26 positions

## Design

The basic Cheminert design involves a flat rotor which is engraved with slots which connect the ports. A stator is held at a constant, preset force against the rotor.

When repairs are required, all that is necessary for rotor access is the removal of two or three screws. Remove the old rotor and replace it, put the screws back in and tighten them, and the valve is ready for use at the factory-set pressure specification. No adjustments are possible, much less required. Other advantages of the design include easy panel mounting, low actuating torque, and compact size.

The flat plate design offers flow paths for basic flow switching, sample injection, and stream selection up to 10 positions (28 positions in some models).

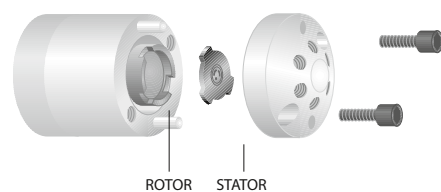

## Materials of Construction

**UHPLC** models have stators of specially coated stainless steel, with PAEK rotors.

**HPLC** models have stators of Nitronic 60 stainless steel, PAEK, Hastelloy C, or titanium, all of which are compatible with common HPLC solvents. Many are available with a proprietary long-life coating. Valcon H rotors are used with metal stators, and Valcon E with PAEK.

**Low pressure** models have PPS stators and rotors of Valcon E2, a proprietary reinforced PTFE composite.

Metal valves are supplied with stainless nuts, with ferrules of the same material as the stator. Fittings for polymeric valves vary with the valve design. The valve price lists contain more detailed information.

Sample injection loops are available in a variety of materials, and are found on the pages with their corresponding valves.

## TECH TIP

For optimal zero dead volume connections, make sure your tubing meets the best industry standards. OD tolerance should be nominal dimension  $\pm .002$ ".

Fractional dimension	Nominal dimension
1/32"	.031
1/16"	.062
1/8"	.125
1/4"	.250
3/8"	.375
1/2"	.500

## MORE INFORMATION

Decoding product no's for Cheminert valves ... pages 264-265

**Actuation** ..... 188-209

**Applications** . 170-171

## Materials

Metals ..... 254-255

Polymers ..... 256

Valve rotors ..... 257

## Valve descriptions

Cheminert

HPLC ..... 149,152

Low pressure ... 150,153

Nanovolume® ..... 147

UHPLC ..... 147-148

Diaphragm ..... 142-143

Valco

Injectors ..... 101

Selectors ..... 102-103

## Cheminert valve prices

HPLC ..... 158-165

Low pressure .... 166-169

Nanovolume®

valves.. 154-155, 158-159

OEM ..... 180-187

Selectors ..... 172-179

UHPLC ..... 154-157



## Nanovolume®

Cheminert Nanovolume® injectors, switching valves, and selectors are ideal for high speed, high throughput techniques which demand a valve and fitting system that minimize internal volume and eliminate dead volume.

A proprietary rotor material and stator coating achieve pressures to 20,000 psi, suitable for the most demanding analytical techniques. All models are compatible with any VICI actuation option.



### Nanovolume® Injectors and switching valves

Application	Fittings		Bore size	Model	Pressure rating	More info
<b>UHPLC</b> 20,000 psi 15,000 psi 10,000 psi	360 micron		100 or 150 µm	C72MU	20,000 psi	p. 154
				C72MX	15,000 psi	p. 154
				C72MH	10,000 psi	vici.com
	1/32" stainless		100 or 150 µm	C72NU	20,000 psi	vici.com
				C72NX	15,000 psi	p. 155
				C72NH	10,000 psi	vici.com
1/16" stainless		150 µm	C72X	15,000 psi	vici.com	
			C72H	10,000 psi	vici.com	
<b>HPLC</b> 5,000 psi	1/32" PEEK or stainless		100 or 150 µm	C2N	5,000 psi	p. 158

### Nanovolume® Internal sample injectors

Application	Fittings		Bore size	Sample sizes available	Model	Pressure rating	More info
<b>UHPLC</b> 20,000 psi 15,000 psi 10,000 psi	1/32" stainless		100 µm	4, 10, or 20 nl	C74NU	20,000 psi	vici.com
					C74NX	15,000 psi	vici.com
					C74NH	10,000 psi	vici.com
	1/16" stainless		150 µm	10, 20, or 30 nl	C74NU	20,000 psi	vici.com
					C74NX	15,000 psi	p. 155
					C74NH	10,000 psi	vici.com
1/16" stainless		150 µm	10, 20, or 50 nl	C74U	20,000 psi	vici.com	
				C74X	15,000 psi	vici.com	
				C74H	10,000 psi	vici.com	
<b>HPLC</b> 5,000 psi	1/32" PEEK or stainless		100 or 150 µm	4, 10, or 20 nl	C4N	5,000 psi	p. 159

#### NANOVOLUME® VALVES AT VICI.COM

For more information on all valve options listed here, go to:

[www.vici.com/cval/cval\\_nano.php](http://www.vici.com/cval/cval_nano.php)



### Nanovolume® Selectors

Application	Fittings		Bore size	Model	Pressure rating	More info
<b>UHPLC</b> 20,000 psi 15,000 psi 10,000 psi	1/32" stainless		100 or 150 µm	C75NU	20,000 psi	vici.com
				C75NX	15,000 psi	p. 172
				C75NH	10,000 psi	vici.com
	1/16" stainless		150 µm	C75U	20,000 psi	vici.com
				C75X	15,000 psi	vici.com
				C75H	10,000 psi	vici.com

**CHEMINERT VALVES**

**UHPLC**

Cheminert UHPLC injectors, switching valves, and selectors are ideal for high speed, high throughput techniques which demand a valve and fitting system that minimize internal volume and eliminate dead volume.



VICI offers UHPLC versions for nanobore and microbore applications.

**Nanovolume® UHPLC valves**



See previous page for information about Nanovolume® UHPLC injectors, switching valves, and selectors.





**Microbore UHPLC injectors and switching valves**

Application	Fittings		Bore size	Model	Pressure rating	More info
<b>UHPLC</b> 20,000 psi 15,000 psi 10,000 psi	1/32" stainless		250 µm	C72NU	20,000 psi	vici.com
				C72NX	15,000 psi	vici.com
				C72NH	10,000 psi	vici.com
	1/16" stainless		250 µm	C72U	20,000 psi	vici.com
				C72X	15,000 psi	p. 156
				C72H	10,000 psi	p. 156

**Microbore UHPLC internal sample injectors**

Application	Fittings		Bore size	Sample sizes available	Model	Pressure rating	More info
<b>UHPLC</b> 20,000 psi 15,000 psi 10,000 psi	1/32" stainless		250 µm	20, 50, or 100 nl	C74NU	20,000 psi	vici.com
					C74NX	15,000 psi	vici.com
					C74NH	10,000 psi	vici.com
	1/16" stainless		250 µm	20, 50, or 100 nl	C74U	20,000 psi	vici.com
					C74X	15,000 psi	p. 157
					C74H	10,000 psi	p. 157

**Microbore UHPLC selectors**

Application	Fittings		Bore size	Model	Pressure rating	More info
<b>UHPLC</b> 20,000 psi 15,000 psi 10,000 psi	1/32" stainless		250 µm	C75NU	20,000 psi	vici.com
				C75NX	15,000 psi	p. 172
				C75NH	10,000 psi	vici.com
	1/16" stainless		250 µm	C75U	20,000 psi	vici.com
				C75X	15,000 psi	vici.com
				C75H	10,000 psi	p. 173

**UHPLC VALVES AT VICI.COM**

For more information on all valve options listed here, go to:

[www.vici.com/cval/cval\\_uhplc.php](http://www.vici.com/cval/cval_uhplc.php)



**MORE INFORMATION**

Nanovolume® injectors and selectors . . . . . 147

## HPLC injectors

### Nanobore

Nanovolume® HPLC injectors and internal sample injectors include 1/32" PEEK nuts and ferrules. See page 147 for an overview of these valves.

### Microbore

**Model C2** valves can be used as injectors or switching valves.

**Model C4** is an internal volume sample injector with sample sizes ranging from 10 nl to 50 nl.

**Model C6** continuous flow injector is designed to maintain pump flow during most of the switching cycle, virtually eliminating pressure spikes.

**Model C1CFI** is a 6 port through-the-handle continuous flow injector. An engraving on the stator maintains pump flow between ports 2 and 3 during most of the switching cycle, virtually eliminating pressure spikes. Because the handle is integral to the design, all Model C1CF valves are manual, with position feedback standard.

### Analytical

**Models C2, C6, and C1CFI** are also available for analytical injection and switching, with port sizes of 0.40 mm (.016"). **Model C4** offers internal volume sample sizes ranging from 0.1 to 0.5 µl.

### Semi-Preparative HPLC

**Model C2** valves are available with flow passages optimized for semi-preparative HPLC. Choose from 4, 6, 8, or 10 port versions. Contact our sales or technical support departments for more information.

### Autosampler Replacements

We supply direct replacements for injectors in many popular autosamplers. Call technical support to determine which replacement is best for your application.



**Model C2**  
Microbore, page 160  
Analytical, page 163

5,000 psi



**Model C4**  
Microbore, page 161  
Analytical, page 164

5,000 psi  
Internal sample



**Model C6**  
Microbore, page 162  
Analytical, page 165


5,000 psi  
Continuous flow



**Model C1CFI**  
Microbore, page 162  
Analytical, page 165

5,000 psi  
Through-handle  
Continuous flow

### MODEL C1CFI FLOWPATH

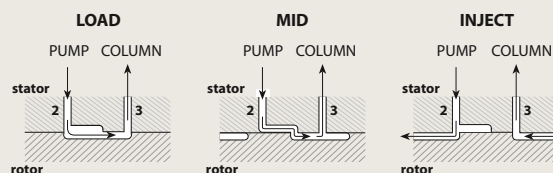

For schematic diagrams of continuous flow Model C6, see pages 162 and 165.

### MORE INFORMATION

HPLC selectors .....152  
Injectors and selectors  
for OEMs .....151,153

**CHEMINERT VALVES**

**Low pressure injectors**

**With Valco Zero Dead Volume (ZDV) Fittings**

C20Z Series valves with zero dead volume fittings (10-32 thread) are shipped with standard PEEK nuts and ferrules. Zero dead volume fingertight fittings and nuts and ferrules of other materials may be ordered separately. Standard specifications are 100 psi gas/250 psi liquid at 75°C. On request, the pressure rating can be as high as 600 psi liquid. **Caution:** Metal fittings will damage the threads and details of C20Z series valves. Use of metal fittings in a C20Z valve voids the warranty.

The **Model C22Z** is a conventional two position sample injector and switching valve, with 4, 6, 8, or 10 ports. Sample injection requires a loop, ordered separately.

The **Model C24Z** is an internal sample injector, for applications in which the sample size is smaller than that of any available external loop. Sample sizes available are 0.2, 0.5, and 1 µl.



**Model C22Z**  
page 166

Low pressure  
10-32 ZDV



**Model C24Z**  
page 168

Low pressure  
10-32 ZDV  
Internal sample

**With Cheminert 1/4-28 Fittings**

C20 Series valve caps have female threads for direct connection of lines – no couplings are required. C20 Series valves are available in 4, 6, 8, and 10 port versions. Standard specifications are 100 psi gas/250 psi liquid at 75°C.

Multicolored Cheminert 1/4-28 flangeless fittings for 1/16" or 1/8" OD tubing (depending on the valve model) are included.

**Model C22** valves are used for sample injection or switching. (Functionally equivalent to Model C22Z) Sample injection requires a loop, ordered separately.

The **Model C24** is an internal sample injector like the C24Z, available with 0.5, 1.0, or 2.0 µl sample size.



**Model C22**  
page 167

Low pressure  
1/4-28 Int.



**Model C24**  
page 169

Low pressure  
1/4-28 Int.  
Internal sample

**CAUTION**  
Metal fittings will damage the threads and details of C20Z series valves (models C22Z, C24Z, C25Z). Use of metal fittings in a C20Z valve voids the warranty.

**TECH TIP**  
Our life tests indicate that these valves will typically give more than 100,000 cycles before requiring any service. This assumes that the fluid used is free of particulates and not reactive toward the valve components. If the stream may contain particulates, or if it has high salt content which could precipitate within the sample lines, use an in-line filter.  
*Note:* Valves with purge ports are available on request.

**MORE INFORMATION**  
Decoding product no's for Cheminert valves ... pages 264-265

**Actuation** ..... 188-209

**Applications** . . . 170-171

**Materials**  
Metals ..... 254-255  
Polymers ..... 256  
Valve rotors ..... 257

**Valve descriptions**  
Cheminert  
Injectors ..... 147-151  
Selectors ..... 152-153  
Nanovolume® ..... 147  
Diaphragm ..... 142-143  
Valco  
Injectors ..... 101  
Selectors ..... 102-103

**Cheminert valve prices**  
HPLC ..... 158-165  
Low pressure .... 166-169  
Nanovolume®  
valves. 154-155, 158-159  
Selectors ..... 172-179  
OEM ..... 180-187  
UHPLC ..... 154-157



For OEMs



**Integrated Motor/Injector Assemblies**

Cheminert's **Model C52** (HPLC) and **Model C62(Z)** (low pressure) injectors are integrated motor/valve assemblies designed specifically to be built into an OEM system. Using the well-proven Cheminert injector designs and the 24 volt motor from our popular microelectric actuators, the C52 and C62 need only to be connected to the instrument's power supply.

Control is simplified to require a single contact closure; the injector's position is determined by whether the closure is held high or low. There's even an easy way for the instrument to confirm the valve's position by sensing the output from a built-in sensor.

In the default control mode, one contact closure shifts the injector to inject and a second is required to shift it back to load. A simple jumper change shifts the mode to single contact closure, in which a contact closure moves the injector from load to inject, where it remains until the contact is broken and the injector reverts to the load position. Jumper settings can also be modified to change the motor's degree of rotation so it can be used with any of the valve models available.

All these features are built into a compact and light-weight package and are available in 4, 6, 8, and 10 port configurations. Serial communication via RS-232 is optional.

**Autosampler and Other OEM Injectors**

**Model C3** is a unique injector with a syringe injection port centered on the rear face of the valve (opposite the handle or actuator), allowing convenient syringe insertion when the valve is mounted on an actuator inside an instrument.



**Model C2V** is designed specifically for use in an autosampler. It is like the standard C2 except that the sample port is perpendicular to the valve axis. This permits the valve and actuator to be installed horizontally, while the syringe loads the injector vertically.

**UNIVERSAL ACTUATOR**

The new universal actuator operates virtually any Valco or Cheminert rotary valve – two position and selector alike – greatly simplifying the electronic aspect of instrument design.....193

**OEM SELECTOR VALVES**

See pages 153 and 186-187 for selector (multiposition) valves for OEMs.

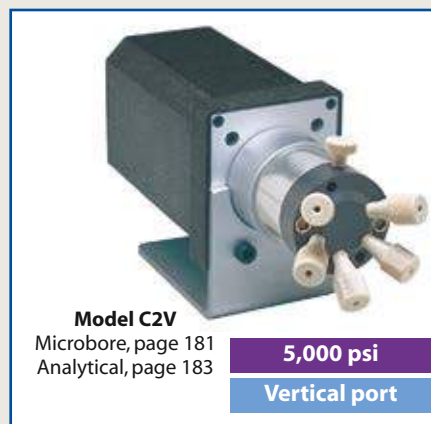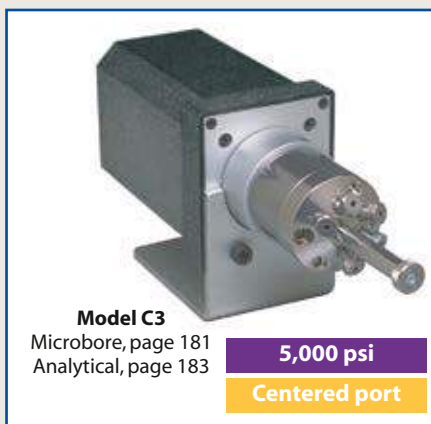

**CHEMINERT VALVES**

**UHPLC and high pressure selectors**

UHPLC **Model C75** selectors offer pressure ratings of 20,000 psi, 15,000 psi and 10,000 psi with 1/32" and 1/16" fittings for nanobore and microbore applications. See charts on pages 147 and 148 for all options.



**Model C75**  
See chart on page 147

- 20,000 psi
- 15,000 psi
- 10,000 psi



**Model C5**  
page 174

5,000 psi

HPLC **Model C5**, with Valco ZDV fitting details, is available with 4, 6, 8, or 10 positions. Stators are available in Nitronic 60 stainless, titanium, and Hastelloy C-22, with rotors of Valcon H, all of which are compatible with common HPLC solvents. PAEK stators are used in combination with Valcon E rotors.



**HPLC column selector system**  
page 175

5,000 psi

Column selector system

The C5 valve is the backbone of the Cheminert **HPLC column selector system**, which includes two stream selection valves mounted on a single microelectric actuator.

Columns are not included.

Consult the factory for information about a **UHPLC column selector system**.

**UNIVERSAL ACTUATOR**

The new universal actuator operates virtually any Valco or Cheminert rotary valve – two position and selector alike – greatly simplifying the electronic aspect of instrument design. . . . 193

**CAUTION**

Metal fittings will damage the threads and details of C25Z, C25G, and C65Z series valves.

Use of metal fittings in these valves voids the warranty.

**MORE INFORMATION**  
Actuation . . . pp 188-209

**Materials**  
Metals . . . . . 254-255  
Polymers . . . . . 256  
Valve rotors . . . . . 257

**Valve descriptions**  
Cheminert  
Injectors . . . . . 147-151  
Selectors . . . . . 152-153  
Nanovolume® . . . . . 147  
Diaphragm . . . . . 142-143  
Valco  
Injectors . . . . . 101  
Selectors . . . . . 102-103

**Cheminert valve prices**  
HPLC . . . . . 158-165  
Low pressure . . . . . 166-169  
Nanovolume® valves . . . . . 154-155, 158-159  
Selectors . . . . . 172-179  
OEM . . . . . 180-187  
UHPLC . . . . . 154-157

**PORT DIAMETERS**

Model	Fitting size	Standard port diameter
<b>High Pressure</b>		
C5	1/16" ZDV	0.15 mm (.006")
		0.25 mm (.010")
		0.40 mm (.016")
		0.75 mm (.030")
<b>Low Pressure</b>		
C25Z	1/16" ZDV	0.75 mm (.030")
C25	1/4-28 for 1/16" tubing	0.75 mm (.030")
		1.50 mm (.060")
C25G	1/16" ZDV	0.67 mm (.026")
C45	1/2-20 for 1/4" tubing	4.6 mm (.180")
<b>OEM – High Pressure</b>		
C55	1/16" ZDV	0.25 mm (.010")
		0.40 mm (.016")
		0.75 mm (.030")
<b>OEM – Low Pressure</b>		
C65Z	1/16" ZDV	0.75 mm (.030")
C65	1/4-28 for 1/16" tubing	0.75 mm (.030")
		1.50 mm (.060")
		1.50 mm (.060")

**SPECIFICATIONS**

**CHEMINERT SELECTORS**

Model	Stator material	Std rotor material	Max pressure	Max temp	Number of positions
<b>High Pressure</b>					
C5	Metal	Valcon H	5000 psi liq	75°C	4, 6, 8, 10
	PAEK	Valcon E	5000 psi liq	50°C	4, 6, 8, 10
<b>Low Pressure</b>					
C25Z	PPS	Valcon E2	100 psi gas/ 250 psi liq	75°C	4, 6, 8, 10, 12, 14
C25	PPS	Valcon E2	100 psi gas/ 250 psi liq	75°C	4, 6, 8, 10
C25G	PEEK	Valcon M	100 psi liq	50°C	20, 24, 28
C45	PPS	Valcon TF	100 psi liq	50°C	4, 6, 8
<b>OEM – High Pressure</b>					
C55	Metal	Valcon H	5000 psi liq	50°C	4, 6, 8, 10
	PAEK	Valcon E	5000 psi liq	50°C	4, 6, 8, 10
<b>OEM – Low Pressure</b>					
C65Z	PPS	Valcon E2	100 psi gas/ 250 psi liq	50°C	4, 6, 8, 10
C65	PPS	Valcon E2	100 psi gas/ 250 psi liq	50°C	4, 6, 8, 10



Model C25Z  
page 176

Low pressure

10-32 ZDV



Model C25  
page 177

Low pressure

1/4-28 Internal



Model C25G  
page 178

Low pressure

6-40 flat bottom



Model C45  
page 179

Low pressure

1/2-20 Int.

## Low pressure selectors

### With Valco Zero Dead Volume Fittings

**Model C25Z** valves feature the popular 1/16" Valco ZDV details for 1/16" OD tubing. Available in 4, 6, 8, 10, 12, and 14 positions, with a variety of actuator options. Standard materials are PPS stator and Valcon E2 rotor, with other materials optional.

### With Cheminert 1/4-28 Fittings

The **Model C25** has female 1/4-28 threaded fitting details for direct connection of lines – no couplings are required. The C25 is available in 4, 6, 8, and 10 position models. Multicolored Cheminert 1/16" or 1/8" flangeless fittings are included. Rotors are made of Valcon E2 with stators of PPS.

### With 6-40 Fittings for 1/16" or 1/32" tubing

**Model C25G** valves feature 6-40 flat bottom details that can accommodate 1/16" (standard) or 1/32" (optional) tubing. The fitting is one piece PEEK with a stainless steel retainer. available with 20, 24, or 28 positions. Universal actuator is required.

### With Cheminert 1/2-20 Fittings

**Model C45** valves feature 1/2-20 threaded fitting details for use with 1/4" OD tubing. This is a tapered rotor valve with large bore for high flow applications. Rotors are made from Valcon E2, with valve body made from PPS. Available in 4 and 6 position configurations only.

## For OEMs


### Integrated Motor/Stream Selectors

Cheminert's new **Model C55** (HPLC) and **Model C65(Z)** (low pressure) stream selectors are integrated motor/valve assemblies designed specifically to be built into an OEM system. The compact, lightweight package is available in 4, 6, 8, and 10 position configurations.

Using the well-proven Cheminert stream selector design and the 24 volt motor from our microelectric actuators, the Models C55, C65, and C65Z need only to be connected to an instrument's power supply. A single momentary contact closure steps the valve to the next position; a separate contact closure moves the valve to position 1 (Home).


See how our stream selectors can simplify your instrument design and minimize time to market – all while trimming your costs.

Serial communication via RS-232 is optional.

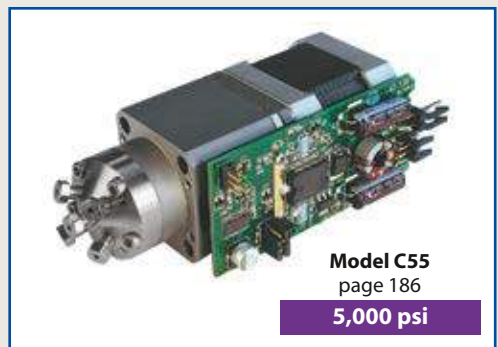

Model C55  
page 186

5,000 psi

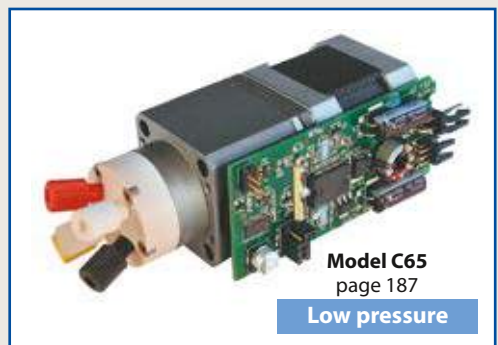

Model C65  
page 187

Low pressure

### OEM INJECTORS

See pages 151, 180-185 for injectors for OEMs.

**CHEMINERT VALVES**

**20,000 psi UHPLC Nanovolume® valves**  
**360 micron fittings, 100 micron bore (.004")**

*Model C72MU*

- 20,000 psi**
- Nanobore**
- 360 µm
100 µm

Includes stainless 360 micron fittings.  
 Valves for use with fused silica tubing have gold-plated ferrules.  
 Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.



**4 Port**  
Prod No



**6 Port**  
Prod No

**Coated stainless stator for use with stainless tubing**

Manual	C72MU-4674	C72MU-4676
With air actuator	C72MU-4674A	C72MU-4676A
With microelectric actuator	C72MU-4674EH	C72MU-4676EH
Replacement valve	C72MU-4674D	C72MU-4676D
Replacement rotor	C72M-46R4	C72M-46R6
Replacement stator	C72M-4C74	C72M-4C76

**For use with fused silica tubing**

Manual	C72MFSU-4674	C72MFSU-4676
With air actuator	C72MFSU-4674A	C72MFSU-4676A
With microelectric actuator	C72MFSU-4674EH	C72MFSU-4676EH
Replacement valve	C72MFSU-4674D	C72MFSU-4676D
Replacement rotor	C72M-46R4	C72M-46R6
Replacement stator	C72M-4C74	C72M-4C76

**SPECS**

**20,000 psi liq**  
**50°C max**  
 Stainless w/ inert coating stator  
 Valcon E3 rotor

**OPTIONS**

- 150 micron (.006") bore
- Internal sample injector (4 - 20 nl)
- 10,000 and 15,000 psi versions available



**Model C72MU**  
**360 micron fittings**  
 (Model C72MX is similar)

**15,000 psi UHPLC Nanovolume® valves**  
**360 micron fittings, 150 micron bore (.006")**

*Model C72MX*

- 15,000 psi**
- Nanobore**
- 360 µm
150 µm

Includes stainless 360 micron fittings.  
 Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.



**6 Port**  
Prod No



**10 Port**  
Prod No

**Coated stainless stator**

Manual	C72MX-6676	C72MX-6670
With air actuator	C72MX-6676A	C72MX-6670A
With microelectric actuator	C72MX-6676EH	C72MX-6670EH
Replacement valve	C72MX-6676D	C72MX-6670D
Replacement rotor	C72M-66R6	C72M-66R0
Replacement stator	C72M-6C76	C72M-6C70

**SPECS**

**15,000 psi liq**  
**50°C max**  
 Stainless w/ inert coating stator  
 Valcon E3 rotor

**OPTIONS**

- 100 micron (.004") bore
- Internal sample injector (4 - 20 nl)
- 10,000 psi version available
- 4 and 8 port versions available

**MORE INFORMATION**

360 micron Nanovolume® fittings . . . . . page 58

**15,000 psi UHPLC Nanovolume® valves**  
**1/32" Valco stainless fittings, 150 micron bore (.006")**

Model C72NX

**SPECS**

15,000 psi liq  
 50°C max  
 Stainless w/ inert coating stator  
 Valcon E3 rotor

**OPTIONS**

- 100 micron (.004") bore
- 250 micron (.010") bore
- 10,000 psi version available
- 4 and 8 port versions available

Includes stainless nuts and ferrules.  
 Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.  
 \* The 6 port valve includes a 5 µl loop of the stator material.

15,000 psi

Nanobore

1/32"

150 µm



**6 Port \***  
Prod No



**10 Port**  
Prod No

**Coated stainless stator**

Manual  
 With air actuator  
 With microelectric actuator  
  
 Replacement valve  
 Replacement rotor  
 Replacement stator

C72NX-6676  
 C72NX-6676A  
 C72NX-6676EH

C72NX-6670  
 C72NX-6670A  
 C72NX-6670ED

C72NX-6676D  
 C72N-66R6  
 C72N-6C76

C72NX-6670D  
 C72N-66R0  
 C72N-6C70



**Model C72NX**  
 1/32" Valco stainless fittings

**Sample loops for C72NX valves**

Each stainless loop includes two stainless 1/32" Valco fittings.

Volume	Stainless Prod No
1 µl	CSLN1K
2 µl	CSLN2K
5 µl	CSLN5K
10 µl	CSLN10K



**Model C74NX**  
 1/32" Valco stainless fittings

**15,000 psi UHPLC Nanovolume® internal sample injectors**  
**1/32" Valco stainless fittings, 150 micron bore (.006")**

Model C74NX

**SPECS**

15,000 psi liq  
 50°C max  
 Stainless w/ inert coating stator  
 Valcon E3 rotor

**OPTIONS**

- 100 micron (.004") bore
- 250 micron (.010") bore
- 10,000 and 20,000 psi versions available

Includes stainless nuts and ferrules.  
 Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.



15,000 psi

Nanobore

Internal sample

1/32"

150 µm

**10 nanoliters**  
Prod No

**20 nanoliters**  
Prod No

**30 nanoliters**  
Prod No

**Coated stainless stator**

Manual  
 With air actuator  
 With microelectric actuator  
  
 Replacement valve  
 Replacement rotor  
 Replacement stator

C74NX-6674-.01  
 C74NX-6674-.01A  
 C74NX-6674-.01EH

C74NX-6674-.02  
 C74NX-6674-.02A  
 C74NX-6674-.02EH

C74NX-6674-.03  
 C74NX-6674-.03A  
 C74NX-6674-.03EH

C74NX-6674-.01D  
 C74N-66R-.01  
 C74N-6C7

C74NX-6674-.02D  
 C74N-66R-.02  
 C74N-6C7

C74NX-6674-.03D  
 C74N-66R-.03  
 C74N-6C7

**MORE INFORMATION**

1/32" Valco fittings . . . . .pages 10,12  
 1/16" Nanovolume® injectors  
 C72X . . . . . vici.com  
 C74X . . . . . vici.com

**CHEMINERT VALVES**

**15,000 psi UHPLC microbore valves,  
1/16" Valco fittings, 0.25 mm ports (.010")**

Model C72X

**15,000 psi**  
**Microbore**  
**1/16" 0.25 mm**

Includes stainless steel nuts and ferrules.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.  
\* The 6 port valve includes a 5 µl stainless steel sample loop.

**SPECS**

**15,000 psi liq**  
**50°C max**  
Stainless stator  
with inert coating  
Valcon E3 rotor

**OPTIONS**

■ 0.15 mm ports (.006")



**4 Port**  
Prod No



**6 Port\***  
Prod No



**8 Port**  
Prod No



**10 Port**  
Prod No

Manual	C72X-1674	C72X-1676	C72X-1678	C72X-1670
With air actuator	C72X-1674A	C72X-1676A	C72X-1678A	C72X-1670A
With microelectric actuator	C72X-1674EH	C72X-1676EH	C72X-1678ED	C72X-1670ED
Replacement valve	C72X-1674D	C72X-1676D	C72X-1678D	C72X-1670D
Replacement rotor	C72-16R4	C72-16R6	C72-16R8	C72-16R0
Replacement stator	C72-1C74	C72-1C76	C72-1C78	C72-1C70

**10,000 psi UHPLC microbore valves,  
1/16" Valco fittings, 0.25 mm ports (.010")**

Model C72H

**10,000 psi**  
**Microbore**  
**1/16" 0.25 mm**

Includes stainless steel nuts and ferrules.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.  
\* The 6 port valve includes a 5 µl stainless steel sample loop.

**SPECS**

**10,000 psi liq**  
**50°C max**  
Stainless stator  
with inert coating  
Valcon E3 rotor

**OPTIONS**

■ 0.15 mm ports (.006")



**4 Port**  
Prod No



**6 Port\***  
Prod No



**8 Port**  
Prod No



**10 Port**  
Prod No

Manual	C72H-1674	C72H-1676	C72H-1678	C72H-1670
With air actuator	C72H-1674A	C72H-1676A	C72H-1678A	C72H-1670A
With microelectric actuator	C72H-1674EH	C72H-1676EH	C72H-1678ED	C72H-1670ED
Replacement valve	C72H-1674D	C72H-1676D	C72H-1678D	C72H-1670D
Replacement rotor	C72-16R4	C72-16R6	C72-16R8	C72-16R0
Replacement stator	C72-1C74	C72-1C76	C72-1C78	C72-1C70



**Model C72H**  
**(C72X similar)**  
**1/16" ZDV fittings**

**Stainless steel sample loops** *for C72X and C72H valves*

Each loop includes two stainless steel nuts and ferrules.  
Metal loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.

Volume	Prod No	Volume	Prod No	Volume	Prod No
2 µl	CSL2	50 µl	CSL50	1 ml	CSL1K
5 µl	CSL5	100 µl	CSL100	2 ml	CSL2K
10 µl	CSL10	250 µl	CSL250	5 ml	CSL5K
20 µl	CSL20	500 µl	CSL500	10 ml	CSL10K



**ABOUT LOOPS**

■ Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.

## 15,000 psi UHPLC microbore internal sample injectors, 1/16" Valco fittings, 0.25 mm ports (.010")

Model C74X

**SPECS**

15,000 psi liq  
50°C max

Stainless stator  
with inert coating  
Valcon E3 rotor

**OPTIONS**

■ 0.15 mm ports (.006")

Includes stainless steel nuts and ferrules.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.



15,000 psi

Microbore

Internal sample

1/16"

0.25 mm

Sample volume	20 nanoliters <i>Prod No</i>	50 nanoliters <i>Prod No</i>	100 nanoliters <i>Prod No</i>
Manual	C74X-1674-.02	C74X-1674-.05	C74X-1674-.1
With air actuator	C74X-1674-.02A	C74X-1674-.05A	C74X-1674-.1A
With microelectric actuator	C74X-1674-.02EH	C74X-1674-.05EH	C74X-1674-.1EH
Replacement valve	C74X-1674-.02D	C74X-1674-.05D	C74X-1674-.1D
Replacement rotor	C74-16R-.02	C74-16R-.05	C74-16R-.1
Replacement stator	C74-1C7	C74-1C7	C74-1C7

## 10,000 psi UHPLC microbore internal sample injectors, 1/16" Valco fittings, 0.25 mm ports (.010")

Model C74H

**SPECS**

10,000 psi liq  
50°C max

Stainless stator  
with inert coating  
Valcon E3 rotor

**OPTIONS**

■ 0.15 mm ports (.006")

Includes stainless steel nuts and ferrules.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.



10,000 psi

Microbore

Internal sample

1/16"

0.25 mm

Sample volume	20 nanoliters <i>Prod No</i>	50 nanoliters <i>Prod No</i>	100 nanoliters <i>Prod No</i>
Manual	C74H-1674-.02	C74H-1674-.05	C74H-1674-.1
With air actuator	C74H-1674-.02A	C74H-1674-.05A	C74H-1674-.1A
With microelectric actuator	C74H-1674-.02EH	C74H-1674-.05EH	C74H-1674-.1EH
Replacement valve	C74H-1674-.02D	C74H-1674-.05D	C74H-1674-.1D
Replacement rotor	C74-16R-.02	C74-16R-.05	C74-16R-.1
Replacement stator	C74-1C7	C74-1C7	C74-1C7



**Model C74H  
(C74X similar)  
1/16" ZDV fittings**

**MORE INFORMATION**

## Actuators

Air ..... page 197  
Microelectric ..... 190  
Universal ..... 193

## Materials

Metals..... 254-255  
Polymers ..... 256  
Valve rotors..... 257

## Standoff

assemblies ..... 205

**CHEMINERT VALVES**

**5,000 psi Nanovolume® valves,  
1/32" fittings, 100 micron ports (.004")**

*Model C2N*

- 5,000 psi**
- Nanobore**
- 1/32"**
**100 µm**

Includes nuts and ferrules.  
 Valves with stainless stators have stainless fittings.  
 Valves with PEEK stators have PEEK fittings.  
 Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.  
 \* The 6 port valve includes a 250 nI PEEK loop.

**SPECS**  
**5000 psi liq**  
**75°C max**  
 Metal stator  
 Valcon H rotor

---

**5000 psi liq**  
**50°C max**  
 PEEK stator  
 Valcon E rotor

**OPTIONS**  
 ■ 150 micron (.006")  
 and 250 micron (.010")  
 bores



**6 Port\***  
*Prod No*



**10 Port**  
*Prod No*

**N60 stainless stator**

Manual	C2N-4006	C2N-4000
With microelectric actuator	C2N-4006EH	C2N-4000EH
Replacement valve	C2N-4006D	C2N-4000D
Replacement rotor	C2N-40R6	C2N-40R0
Replacement stator	C2N-4C06	C2N-4C00

**PEEK stator**

Manual	C2N-4346	C2N-4340
With microelectric actuator	C2N-4346EH	C2N-4340EH
Replacement valve	C2N-4346D	C2N-4340D
Replacement rotor	C2N-43R6	C2N-43R0
Replacement stator	C2N-4C46	C2N-4C40



**Model C2N**  
**1/32" ZDV fittings**

**Sample loops** *for C2N valves*

Each stainless loop includes two stainless steel nuts and ferrules.  
 Each PEEK loop includes two PEEK nuts and ferrules.

	<b>Stainless steel</b>	<b>PEEK</b>
<i>Volume</i>	<i>Prod No</i>	<i>Prod No</i>
1 µl	CSLN1K	CSLN1KPK
2 µl	CSLN2K	CSLN2KPK
5 µl	CSLN5K	CSLN5KPK
10 µl	CSLN10K	CSLN10KPK



**ABOUT LOOPS**  
 ■ Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.



**5,000 psi Nanovolume® internal sample injector,  
1/32" fittings, 100 micron ports (.004")**

Model C4N

**SPECS**

**5000 psi liq**  
**75°C max**  
 Metal stator  
 Valcon H rotor

**5000 psi liq**  
**50°C max**  
 PAEK stator  
 Valcon E rotor

**OPTIONS**

- 150 micron (.006") bore

Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.



5,000 psi

Nanobore

Internal sample

1/32"

100 µm

Sample volume	4 nanoliters <i>Prod No</i>	10 nanoliters <i>Prod No</i>	20 nanoliters <i>Prod No</i>
<b>N60 stainless stator</b>			
Manual	C4N-4004-.004	C4N-4004-.01	C4N-4004-.02
With microelectric actuator	C4N-4004-.004EH	C4N-4004-.01EH	C4N-4004-.02EH
Replacement valve	C4N-4004-.004D	C4N-4004-.01D	C4N-4004-.02D
Replacement rotor	C4N-40R-.004	C4N-40R-.01	C4N-40R-.02
Replacement stator	C4N-4C0	C4N-4C0	C4N-4C0
<b>PAEK stator</b>			
Manual	C4N-4344-.004	C4N-4344-.01	C4N-4344-.02
With microelectric actuator	C4N-4344-.004EH	C4N-4344-.01EH	C4N-4344-.02EH
Replacement valve	C4N-4344-.004D	C4N-4344-.01D	C4N-4344-.02D
Replacement rotor	C4N-43R-.004	C4N-43R-.01	C4N-43R-.02
Replacement stator	C4N-4C4	C4N-4C4	C4N-4C4



**Model C4N**  
 1/32" ZDV fittings

**CHEMINERT VALVES**

**Microbore valves,  
1/16" Valco fittings, 0.25 mm ports (.010")**

*Model C2*

**5,000 psi**

**Microbore**

**1/16" 0.25 mm**

Includes nuts and ferrules.  
 Valves with metal stators have stainless steel nuts and ferrules of the stator material.  
 Valves with PEEK stators have PEEK nuts and ferrules.  
 Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.  
 \* The 6 port valve includes a 5 µl loop of the stator material.



**4 Port**  
*Prod No*



**6 Port\***  
*Prod No*



**8 Port**  
*Prod No*



**10 Port**  
*Prod No*

**N60 stainless stator**

Manual	C2-1004	C2-1006	C2H-1008	C2H-1000
With air actuator	C2-1004A	C2-1006A	C2H-1008A	C2H-1000A
With microelectric actuator	C2-1004EH	C2-1006EH	C2H-1008EH	C2H-1000EH
Replacement valve	C2-1004D	C2-1006D	C2H-1008D	C2H-1000D
Replacement rotor	C2-10R4	C2-10R6	C2-10R8H	C2-10R0H
Replacement stator	C-1C04	C-1C06	C-1C08H	C-1C00H

**PAEK stator**

Manual	C2-1344	C2-1346	C2H-1348	C2H-1340
With air actuator	C2-1344A	C2-1346A	C2H-1348A	C2H-1340A
With microelectric actuator	C2-1344EH	C2-1346EH	C2H-1348EH	C2H-1340EH
Replacement valve	C2-1344D	C2-1346D	C2H-1348D	C2H-1340D
Replacement rotor	C2-13R4	C2-13R6	C2-13R8H	C2-13R0H
Replacement stator	C-1C44	C-1C46	C-1C48H	C-1C40H

**Titanium stator**

Manual	C2-1034	C2-1036	C2H-1038	C2H-1030
With air actuator	C2-1034A	C2-1036A	C2H-1038A	C2H-1030A
With microelectric actuator	C2-1034EH	C2-1036EH	C2H-1038EH	C2H-1030EH
Replacement valve	C2-1034D	C2-1036D	C2H-1038D	C2H-1030D
Replacement rotor	C2-10R4	C2-10R6	C2-10R8H	C2-10R0H
Replacement stator	C-1C34	C-1C36	C-1C38H	C-1C30H



**Model C2  
1/16" ZDV fittings**

**SPECS**

**5000 psi liq  
75°C max**  
Metal stator  
Valcon H rotor

**5000 psi liq  
50°C max**  
PAEK stator  
Valcon E rotor

**OPTIONS**

- Continuous flow version is available as Model C6. See page 162.
- Hastelloy C stators
- Loop fill port assembly for injection from front of the valve. See page 41.
- 0.15 mm (0.006") bore

**NOTE**

Cheminert high pressure valves with polymeric stators have a longer pilot depth.



Order loops from page 161.

**MORE INFORMATION**

Actuators

- Air ..... page 197
- Microelectric ..... 190
- Universal ..... 193

Materials

- Metals..... 254-255
- Polymers ..... 256
- Valve rotors..... 257

Nuts

- Metal..... 10
- PEEK ..... 63

Ferrules

- Metal..... 12
- PEEK ..... 63

Standoff assemblies ..... 205

## Nanoliter sample injector, 1/16" Valco fittings, 0.15 mm ports (.006")

Model C4

### SPECS

**5000 psi liq**  
**75°C max**  
Metal stator  
Valcon H rotor

**5000 psi liq**  
**50°C max**  
PAEK stator  
Valcon E rotor

### OPTIONS

- 100, 200, and 500 nl sample volumes are also available in 0.25 mm bore.  
*See page 164.*
- Loop fill port assembly for injection from front of the valve.  
*See page 41.*
- 0.25 mm (0.010") bore

### NOTE

Cheminert high pressure valves with polymeric stators have a longer pilot depth.

Includes nuts and ferrules.

Valves with stainless stators have stainless fittings.

Valves with PAEK stators have PEEK fittings.

Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.



5,000 psi

Microbore

Internal sample

1/16"

0.15 mm

Sample volume	10 nanoliters <i>Prod No</i>	20 nanoliters <i>Prod No</i>	50 nanoliters <i>Prod No</i>
<b>N60 stainless stator</b>			
Manual	C4-0004-.01	C4-0004-.02	C4-0004-.05
With air actuator	C4-0004-.01A	C4-0004-.02A	C4-0004-.05A
With microelectric actuator	C4-0004-.01EH	C4-0004-.02EH	C4-0004-.05EH
Replacement valve	C4-0004-.01D	C4-0004-.02D	C4-0004-.05D
Replacement rotor	C4-00R-.01	C4-00R-.02	C4-00R-.05
Replacement stator	C4-0C0	C4-0C0	C4-0C0
<b>PAEK stator</b>			
Manual	C4-0344-.01	C4-0344-.02	C4-0344-.05
With air actuator	C4-0344-.01A	C4-0344-.02A	C4-0344-.05A
With microelectric actuator	C4-0344-.01EH	C4-0344-.02EH	C4-0344-.05EH
Replacement valve	C4-0344-.01D	C4-0344-.02D	C4-0344-.05D
Replacement rotor	C4-03R-.01	C4-03R-.02	C4-03R-.05
Replacement stator	C4-0C4	C4-0C4	C4-0C4



**Model C4**  
1/16" ZDV fittings

### ABOUT LOOPS

- Other materials are available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, and PTFE.  
*See pages 254-255.*
- Metal loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.
- Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.

### Sample loops *for C1, C2, C2V, C3, and C6 valves*

Each metal loop includes two stainless steel nuts and ferrules.

Each PEEK loop includes two PEEK nuts and ferrules.

Volume	Stainless Steel	PEEK (for PAEK stators)	Titanium
	<i>Prod No</i>	<i>Prod No</i>	<i>Prod No</i>
2 µl	CSL2	CZSL2PK	—
5 µl	CSL5	CZSL5PK	—
10 µl	CSL10	CZSL10PK	CSL10TI
20 µl	CSL20	CZSL20PK	CSL20TI
50 µl	CSL50	CZSL50PK	CSL50TI
100 µl	CSL100	CZSL100PK	CSL100TI
250 µl	CSL250	CZSL250PK	CSL250TI
500 µl	CSL500	CZSL500PK	CSL500TI
1 ml	CSL1K	CZSL1KPK	CSL1KTI
2 ml	CSL2K	CZSL2KPK	—
5 ml	CSL5K	CZSL5KPK	—
10 ml	CSL10K	—	—



**CHEMINERT VALVES**

**Microbore continuous flow through-the-handle injector, 1/16" Valco fittings, 0.25 mm ports (.010")**

Model C1CFI

- 5,000 psi
- Microbore
- Continuous flow
- Through-handle
- 1/16"
- 0.25 mm



Available only in manual version.  
Position feedback included.  
Includes nuts and ferrules.  
Valves with stainless stators have stainless fittings.  
Valves with PAEK stators have PEEK fittings.  
Includes one 5 µl loop of the stator material.

	<b>N60 stainless stator</b>	<b>PAEK stator</b>
	<i>Prod No</i>	<i>Prod No</i>
6 port injector	C1CFI-1006	C1CFI-1346
Replacement rotor	C1-10R6	C1-13R6
Replacement stator	C1CF-1C06	C1CF-1C46

Replacement injector fitting for 22 gauge x 2" long needle

C-261

**SPECS**  
5000 psi liq  
75°C max  
Metal stator  
Valcon H rotor

5000 psi liq  
50°C max  
PAEK stator  
Valcon E rotor

**OPTIONS**  
■ 0.40 mm bore (.016") on page 165.

**MORE INFORMATION**  
Syringes..... page 250

**NOTE**  
Cheminert high pressure valves with polymeric stators have a longer pilot depth.



Model C1CFI  
1/16" ZDV fittings

**Microbore continuous flow injector, 1/16" Valco fittings, 0.25 mm ports (.010")**

Model C6

- 5,000 psi
- Microbore
- Continuous flow
- 1/16"
- 0.25 mm

Includes nuts and ferrules.  
Valves with stainless stators have stainless fittings.  
Valves with PAEK stators have PEEK fittings.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.  
Includes one 5 µl loop of the stator material.

	<b>N60 stainless stator</b>	<b>PAEK stator</b>
	<i>Prod No</i>	<i>Prod No</i>
Manual	C6-1006	C6-1346
With pneumatic actuator	C6-1006A	C6-1346A
With standard electric actuator	C6-1006E	C6-1346E
With microelectric actuator	C6-1006EH	C6-1346EH
Replacement valve	C6-1006D	C6-1346D
Replacement rotor	C2-10R6	C2-13R6
Replacement stator	C6-1C06	C6-1C46

**SPECS**  
5000 psi liq  
75°C max  
Metal stator  
Valcon H rotor

5000 psi liq  
50°C max  
PAEK stator  
Valcon E rotor


Order loops from page 161.



Model C6  
1/16" ZDV fittings

**CONTINUOUS FLOWPATHS**

An engraving on the stator maintains pump flow between the pump connection port and the column connection port during most of the switching cycle, virtually eliminating pressure spikes.

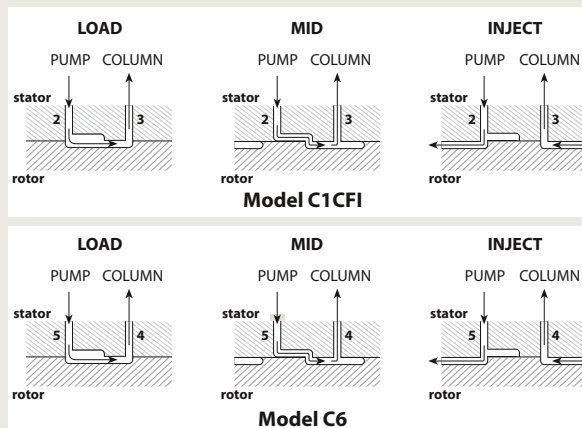

## Analytical valves, 1/16" Valco fittings, 0.40 mm ports (.016")

Model C2

**SPECS**

**5000 psi liq**  
**75°C max**  
Metal stator  
Valcon H rotor

**5000 psi liq**  
**50°C max**  
PAEK stator  
Valcon E rotor

**OPTIONS**

- Continuous flow version is available as Model C6. See page 162.
- Hastelloy C stators
- Semi-prep version with 0.75 mm ports (.030") available
- Loop fill port assembly for injection from front of the valve. See page 41.

**NOTE**

Cheminert high pressure valves with polymeric stators have a longer pilot depth.



Order loops from page 161.

**OPTIONAL FLOWPATH**

Model C2 6 port valves can also be ordered with a dual 3-way rotor, as described in EPA Method 555.

To specify this flowpath, substitute "6X" for "6" in the valve or rotor product number.



Includes nuts and ferrules.

Valves with metal stators have stainless steel nuts and ferrules of the stator material.

Valves with PAEK stators have PEEK nuts and ferrules.

Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.

\*The 6 port valve includes a 20 µl loop of the stator material.

5,000 psi

Analytical

1/16" 0.40 mm



**4 Port**  
Prod No



**6 Port\***  
Prod No



**8 Port**  
Prod No



**10 Port**  
Prod No

**N60 stainless stator**

Manual	C2-2004	C2-2006	C2H-2008	C2H-2000
With air actuator	C2-2004A	C2-2006A	C2H-2008A	C2H-2000A
With microelectric actuator	C2-2004EH	C2-2006EH	C2H-2008EH	C2H-2000EH

Replacement valve	C2-2004D	C2-2006D	C2H-2008D	C2H-2000D
Replacement rotor	C2-20R4	C2-20R6	C2-20R8H	C2-20R0H
Replacement stator	C-2C04	C-2C06	C-2C08H	C-2C00H

**PAEK stator**

Manual	C2-2344	C2-2346	C2H-2348	C2H-2340
With air actuator	C2-2344A	C2-2346A	C2H-2348A	C2H-2340A
With microelectric actuator	C2-2344EH	C2-2346EH	C2H-2348EH	C2H-2340EH

Replacement valve	C2-2344D	C2-2346D	C2H-2348D	C2H-2340D
Replacement rotor	C2-23R4	C2-23R6	C2-23R8H	C2-23R0H
Replacement stator	C-2C44	C-2C46	C-2C48H	C-2C40H

**Titanium stator**

Manual	C2-2034	C2-2036	C2H-2038	C2H-2030
With air actuator	C2-2034A	C2-2036A	C2H-2038A	C2H-2030A
With microelectric actuator	C2-2034EH	C2-2036EH	C2H-2038EH	C2H-2030EH

Replacement valve	C2-2034D	C2-2036D	C2H-2038D	C2H-2030D
Replacement rotor	C2-20R4	C2-20R6	C2-20R8H	C2-20R0H
Replacement stator	C-2C34	C-2C36	C-2C38H	C-2C30H



**Model C2**  
1/16" ZDV fittings

**AUTOSAMPLER REPLACEMENT VALVES**

The Cheminert Model C2 6 port valve is an excellent replacement for the valve originally supplied in many autosamplers, including autosamplers manufactured by Beckman, Gilson, Spark-Holland, CTC, Thermo Fisher, and Varian.

Call technical support to determine which replacement is best for your application.

**CHEMINERT VALVES**

**Analytical internal sample injector,  
1/16" Valco fittings, 0.25 mm ports (.010")**

*Model C4*

- 5,000 psi
- Analytical
- Internal sample
- 1/16" 0.25 mm



Includes nuts and ferrules.  
 Valves with metal stators have stainless steel nuts and ferrules of the stator material.  
 Valves with PEEK stators have PEEK nuts and ferrules.  
 Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.

**SPECS**

**5000 psi liq**  
**75°C max**  
 Metal stator  
 Valcon H rotor

**5000 psi liq**  
**50°C max**  
 PEEK stator  
 Valcon E rotor

**OPTIONS**

- .05 µl sample volumes are also available.
- Loop fill port assembly for injection from front of the valve.  
*See page 41.*

Sample volume	0.1 µl <i>Prod No</i>	0.2 µl <i>Prod Noe</i>	0.5 µl <i>Prod No</i>
<b>N60 stainless stator</b>			
Manual	C4-1004-.1	C4-1004-.2	C4-1004-.5
With air actuator	C4-1004-.1A	C4-1004-.2A	C4-1004-.5A
With microelectric actuator	C4-1004-.1EH	C4-1004-.2EH	C4-1004-.5EH
Replacement valve	C4-1004-.1D	C4-1004-.2D	C4-1004-.5D
Replacement rotor	C4-10R-.1	C4-10R-.2	C4-10R-.5
Replacement stator	C4-1C0	C4-1C0	C4-1C0
<b>PEAK stator</b>			
Manual	C4-1344-.1	C4-1344-.2	C4-1344-.5
With air actuator	C4-1344-.1A	C4-1344-.2A	C4-1344-.5A
With microelectric actuator	C4-1344-.1EH	C4-1344-.2EH	C4-1344-.5EH
Replacement valve	C4-1344-.1D	C4-1344-.2D	C4-1344-.5D
Replacement rotor	C4-13R-.1	C4-13R-.2	C4-13R-.5
Replacement stator	C4-1C4	C4-1C4	C4-1C4
<b>Titanium stator</b>			
Manual	C4-1034-.1	C4-1034-.2	C4-1034-.5
With air actuator	C4-1034-.1A	C4-1034-.2A	C4-1034-.5A
With microelectric actuator	C4-1034-.1EH	C4-1034-.2EH	C4-1034-.5EH
Replacement valve	C4-1034-.1D	C4-1034-.2D	C4-1034-.5D
Replacement rotor	C4-10R-.1	C4-10R-.2	C4-10R-.5
Replacement stator	C4-1C3	C4-1C3	C4-1C3



**Model C4**  
**1/16" ZDV fittings**

**NOTE**

Cheminert high pressure valves with polymeric stators have a longer pilot depth.

**MORE INFORMATION**

Actuators  
 Air ..... page 197  
 Microelectric ..... 190  
 Universal ..... 193  
 Materials  
 Metals..... 254-255  
 Polymers ..... 256  
 Valve rotors..... 257  
 Standoff  
 assemblies ..... 205

**Analytical continuous flow through-the-handle injector, 1/16" Valco fittings, 0.40 mm ports (.016")**

Model C1CFI

**SPECS**

5000 psi liq  
75°C max  
Metal stator  
Valcon H rotor

5000 psi liq  
50°C max  
PAEK stator  
Valcon E rotor

**OPTIONS**

■ 0.25 mm bore (.010") on page 162.

**MORE INFORMATION**

Syringes..... page 250

**NOTE**

Cheminert high pressure valves with polymeric stators have a longer pilot depth.

Available only in manual version.  
Position feedback included.  
Includes nuts and ferrules.  
Valves with stainless stators have stainless fittings.  
Valves with PAEK stators have PEEK fittings.  
Includes one 20 µl loop of the stator material.

**N60 stainless stator**

Prod No

6 port injector C1CFI-2006  
Replacement rotor C1-20R6  
Replacement stator C1CF-2C06

**PAEK stator**

Prod No

C1CFI-2346  
C1-23R6  
C1CF-2C46

Replacement injector fitting C-261  
for 22 gauge x 2" long needle



5,000 psi

Analytical

Continuous flow

Through-the-handle

1/16" 0.40 mm



Model C1CFI  
1/16" ZDV fittings

**Analytical continuous flow injector, 1/16" Valco fittings, 0.40 mm ports (.016")**

Model C6

**SPECS**

5000 psi liq  
75°C max  
Metal stator  
Valcon H rotor

5000 psi liq  
50°C max  
PAEK stator  
Valcon E rotor

Order loops from page 161.

Includes nuts and ferrules.  
Valves with stainless stators have stainless fittings.  
Valves with PAEK stators have PEEK fittings.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.  
Includes a 20 µl loop of the stator material.

**N60 stainless stator**

Prod No

Manual C6-2006  
With pneumatic actuator C6-2006A  
With microelectric actuator C6-2006EH

**PAEK stator**

Prod No

C6-2346  
C6-2346A  
C6-2346EH

Replacement valve C6-2006D  
Replacement rotor C2-20R6  
Replacement stator C6-2C06

5,000 psi

Analytical

Continuous flow


1/16"



Model C6  
1/16" ZDV fittings

**CONTINUOUS FLOWPATHS**

An engraving on the stator maintains pump flow between the pump connection port and the column connection port during most of the switching cycle, virtually eliminating pressure spikes.

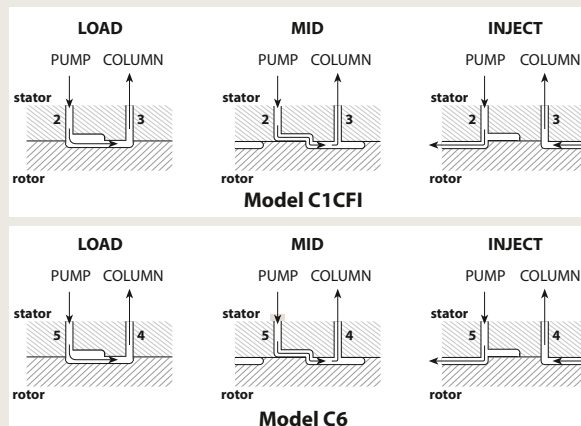

**CHEMINERT VALVES**

**Valves with 1/16" Valco ZDV fittings, 0.75 mm ports (.030")**

Model C22Z

**Low pressure**  
**10-32 ZDV**  
**1/16" 0.75 mm**

Includes Valco ZDV PEEK nuts and ferrules.  
 Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.  
 Sample loops are not included with valves. Order separately.



**4 Port**  
Prod No



**6 Port**  
Prod No



**8 Port**  
Prod No



**10 Port**  
Prod No

Manual	C22Z-3184	C22Z-3186	C22Z-3188	C22Z-3180
With air actuator	C22Z-3184A	C22Z-3186A	C22Z-3188A	C22Z-3180A
With microelectric actuator	C22Z-3184EH	C22Z-3186EH	C22Z-3188EH	C22Z-3180EH
Replacement valve	C22Z-3184D	C22Z-3186D	C22Z-3188D	C22Z-3180D
Replacement rotor	C12-314	C12-316	C12-318	C12-310
Replacement stator	C22Z-384	C22Z-386	C22Z-388	C22Z-380



**Model C22Z**  
1/16" ZDV fittings

**SPECS**

**100 psi gas/ 250 psi liq**  
**75°C max**  
 PPS stator  
 Valcon E2 rotor

**OPTIONS**

- 12 and 14 port versions available.
- Purge option
- Other polymeric rotors and stators are available.

**PURGE OPTION**

The purge option permits a flow of liquid or gas to flush the valve interior of potentially toxic or corrosive components. We recommend this option for applications using materials (such as salt solutions) that could damage the metal parts of the valve.

Consult our technical staff for details.

**Sample loops**

for Model C22Z



Loops include PEEK nuts and ferrules. Loops smaller than 500 µl are made from 1/16" OD tubing; loops 500 µl or bigger are made from 1/8" OD tubing with polymeric unions and 1/16" ends.

	<b>FEP</b>	<b>PTFE</b>	<b>PEEK</b>
Volume	Prod No	Prod No	Prod No
5 µl	CZSL5FEP	CZSL5TF	CZSL5PK
10 µl	CZSL10FEP	CZSL10TF	CZSL10PK
20 µl	CZSL20FEP	CZSL20TF	CZSL20PK
50 µl	CZSL50FEP	CZSL50TF	CZSL50PK
100 µl	CZSL100FEP	CZSL100TF	CZSL100PK
250 µl	CZSL250FEP	CZSL250TF	CZSL250PK
500 µl	CZSL500FEP	CZSL500TF	CZSL500PK
1 ml	CZSL1KFEP	CZSL1KTF	CZSL1KPK
2 ml	CZSL2KFEP	CZSL2KTF	CZSL2KPK

**ABOUT LOOPS**

- Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.

**MORE INFORMATION**

Actuators  
 Air ..... page 197  
 Microelectric ..... 190  
 Universal ..... 193  
 Materials  
 Metals ..... 254-255  
 Polymers ..... 256  
 Valve rotors ..... 257  
 Standoff assemblies ..... 205



**Valves with 1/4-28 fitting details for 1/16" tubing, 0.75 mm ports (.030")**

Model C22

**SPECS**

100 psi gas/ 250 psi liq  
75°C max  
PPS stator  
Valcon E2 rotor

Includes multicolored Cheminert 1/4-28 flangeless fittings for 1/16" tubing.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.  
Sample loops are not included with valves. Order separately.

Low pressure

1/4-28 Internal

1/16" 0.75 mm



**4 Port**  
Prod No



**6 Port**  
Prod No



**8 Port**  
Prod No



**10 Port**  
Prod No

Manual	C22-3184	C22-3186	C22-3188	C22-3180
With air actuator	C22-3184A	C22-3186A	C22-3188A	C22-3180A
With microelectric actuator	C22-3184EH	C22-3186EH	C22-3188EH	C22-3180EH
Replacement valve	C22-3184D	C22-3186D	C22-3188D	C22-3180D
Replacement rotor	C22-314	C22-316	C22-318	C22-310
Replacement stator	C22-384	C22-386	C22-388	C22-380

**Valves with 1/4-28 fitting details for 1/8" tubing, 1.50 mm ports (.060")**

Model C22

**SPECS**

100 psi gas/ 250 psi liq  
75°C max  
PPS stator  
Valcon E2 rotor

Includes multicolored Cheminert 1/4-28 flangeless fittings for 1/8" tubing.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.  
Sample loops are not included with valves. Order separately.

Low pressure

1/4-28 Internal

1/8" 1.50 mm

**4 Port**  
Prod No

**6 Port**  
Prod No

**8 Port**  
Prod No

**10 Port**  
Prod No

Manual	C22-6184	C22-6186	C22-6188	C22-6180
With air actuator	C22-6184A	C22-6186A	C22-6188A	C22-6180A
With microelectric actuator	C22-6184EH	C22-6186EH	C22-6188EH	C22-6180EH
Replacement valve	C22-6184D	C22-6186D	C22-6188D	C22-6180D
Replacement rotor	C22-614	C22-616	C22-618	C22-610
Replacement stator	C22-684	C22-686	C22-688	C22-680

**Sample loops**

for Model C22

Loops include flangeless fittings with white color nuts. Loops smaller than 500 µl are made from 1/16" OD tubing; loops 500 µl or bigger are made from 1/8" OD tubing.

Volume	FEP Prod No	PTFE Prod No	PEEK Prod No
20 µl	CFSL20FEP	CFSL20TF	CFSL20PK
50 µl	CFSL50FEP	CFSL50TF	CFSL50PK
100 µl	CFSL100FEP	CFSL100TF	CFSL100PK
250 µl	CFSL250FEP	CFSL250TF	CFSL250PK
500 µl	CFSL500FEP	CFSL500TF	CFSL500PK
1 ml	CFSL1KFEP	CFSL1KTF	CFSL1KPK
2 ml	CFSL2KFEP	CFSL2KTF	CFSL2KPK



**Model C22**  
1/4-28 fittings

**ABOUT LOOPS**

Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.

**Internal sample injectors, 1/16" Valco ZDV fittings, 0.40 mm ports (.016")**

Model C24Z

- Low pressure
- Internal sample
- 10-32 ZDV
- 1/16" 0.40 mm

Includes Valco ZDV PEEK nuts and ferrules.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.



**SPECS**  
100 psi gas/ 250 psi liq  
75°C max  
PPS stator  
Valcon E2 rotor

- OPTIONS**
- 2.0 µl sample volumes are also available.
  - Purge option.
  - Other polymeric rotors and stators are available.

**PURGE OPTION**  
The purge option permits a flow of liquid or gas to flush the valve interior of potentially toxic or corrosive components. We recommend this option for applications using materials (such as salt solutions) that could damage the metal parts of the valve.

Consult our technical staff for details.

Sample volume	0.2 µl <i>Prod No</i>	0.5 µl <i>Prod No</i>	1 µl <i>Prod No</i>
Manual	C24Z-2184-2	C24Z-2184-5	C24Z-2184-1
With air actuator	C24Z-2184-2A	C24Z-2184-5A	C24Z-2184-1A
With microelectric actuator	C24Z-2184-2EH	C24Z-2184-5EH	C24Z-2184-1EH
Replacement valve	C24Z-2184-2D	C24Z-2184-5D	C24Z-2184-1D
Replacement rotor	C24-10R-2	C24-10R-5	C24-10R-1
Replacement stator	C24Z-1C8	C24Z-1C8	C24Z-1C8



**Model C24Z**  
1/16" ZDV fittings

**MORE INFORMATION**

Actuators  
 Air ..... page 197  
 Microelectric ..... 190  
 Universal ..... 193  
 Materials  
 Metals ..... 254-255  
 Polymers ..... 256  
 Valve rotors ..... 257  
 Standoff  
 assemblies ..... 205

**Internal sample injectors, 1/4-28 for 1/16" tubing, 0.50 mm ports (.020")**

*Model C24*

**SPECS**

**100 psi gas/ 250 psi liq**  
**75°C max**  
 PPS stator  
 Valcon E2 rotor

**OPTIONS**

- 0.2 µl sample volumes are also available.
- Purge option
- Other polymeric rotors and stators are available. Consult the factory for prices and information.

Includes multicolored Cheminert 1/4-28 flangeless fittings for 1/16" tubing.  
 Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.



Low pressure
Internal sample
1/4-28 Internal
1/16" 0.50 mm

Sample volume	0.5 µl <i>Prod No</i>	1 µl <i>Prod No</i>	2 µl <i>Prod No</i>
Manual	C24-2184-.5	C24-2184-1	C24-2184-2
With air actuator	C24-2184-.5A	C24-2184-1A	C24-2184-2A
With microelectric actuator	C24-2184-.5EH	C24-2184-1EH	C24-2184-2EH
Replacement valve	C24-2184-.5D	C24-2184-1D	C24-2184-2D
Replacement rotor	C24-10R-.5	C24-10R-1	C24-10R-2
Replacement stator	C24-1C8	C24-1C8	C24-1C8



**Model C24**  
**1/4-28 fittings**

**CHEMINERT VALVES**


These illustrations show basic sample injection techniques using Cheminert two position valves. With rare exceptions, there is no difference between switching valves and external volume sampling valves, so the same valve can be used for either function.

The unique advantage of 8 and 10 port valves is that they reduce extra column volume by combining sampling and switching functions in a single valve. This minimizes expense, maintenance, service, and risk of leaks as compared to multiple 6 port valve systems.

**4 port internal sample injector**

**MICROVOLUME SAMPLE INJECTION**


The internal sample (fixed volume) flowpath is used when very small sample volumes are required. The sample size is determined by a passage engraved on the valve rotor, allowing precise, repeatable injections. In Position A, the sample flows through the sample passage while the mobile phase flows through to the column. The third passage is inactive. In Position B, the sample passage is in line with the column and the mobile phase injects the contents of the sample passage into the column. The passage which was inactive in Position A allows the sample to continue flowing without interruption.

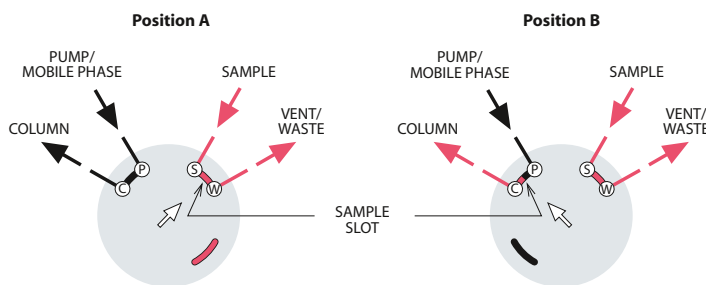


**4 port switching valve**

**DETECTOR SELECTION FROM TWO COLUMNS OR ONE COLUMN AND AUXILIARY CARRIER**

This unique configuration allows analyses of different parts of one analysis with two different detectors, without splitting or multiple injections.

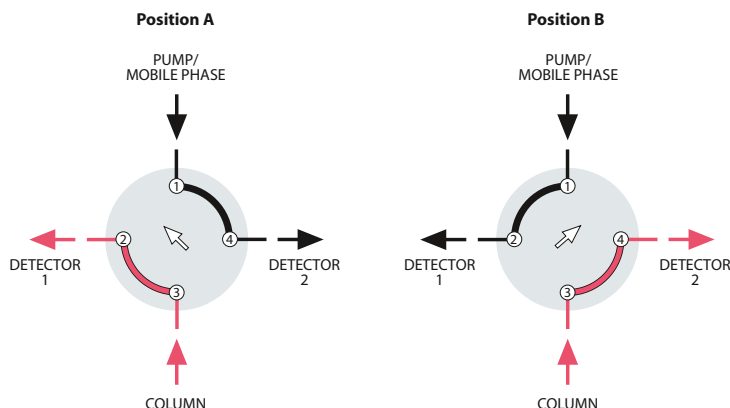

6 port external sample injector

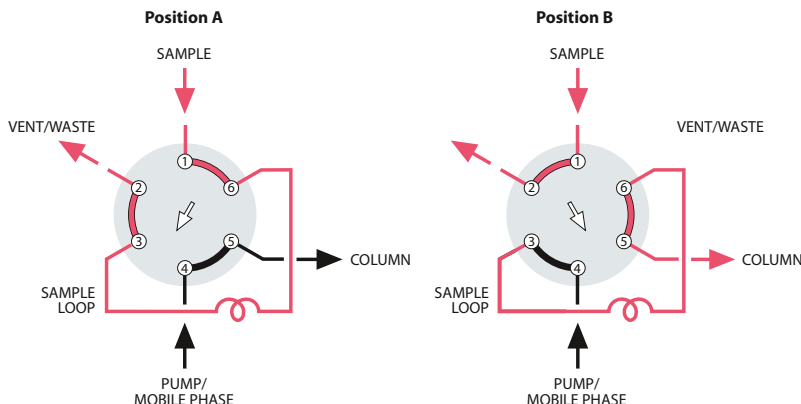


SAMPLE INJECTION

With the valve in Position A, sample flows through the external loop while the mobile phase flows directly through to the column. When the valve is switched to Position B, the sample contained in the sample loop and valve flow passage is displaced by the mobile phase and is carried into the column.

Note: Especially for partial-filled loops, the flow direction of the mobile phase through the loop should be opposite (backflush) to the flow direction during the loading of the loop.

More applications .....pages 120-121

8 port sampling/switching

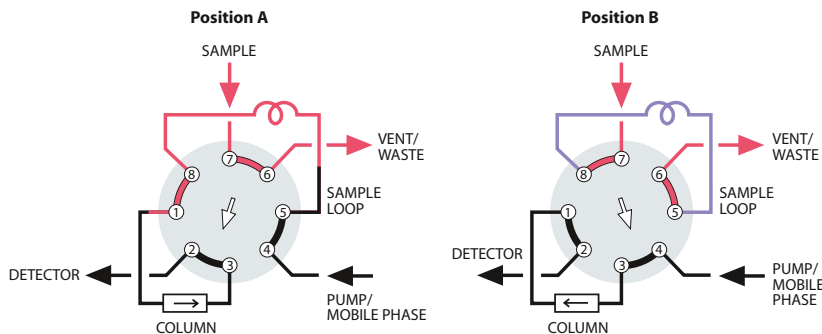


LOOP SAMPLING WITH BACKFLUSH TO DETECTOR

One valve performs the functions of sampling and backflush valves, simplifying operation and reducing cost. When components of interest are detected, the strongly retained components are backflushed and removed from the column without temperature programming.

More applications ..... page 121

10 port sampling/switching

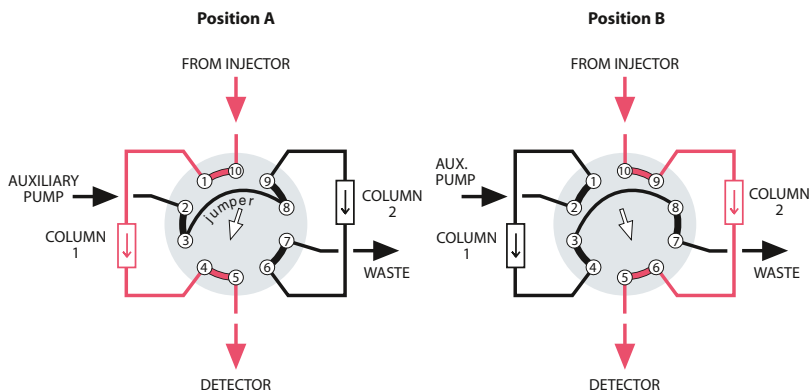

ALTERNATE COLUMN REGENERATION

When columns must be regenerated following each analysis, this technique permits automation of the process. While one column performs the analysis, the second column undergoes regeneration through use of an auxiliary pump. Once the first analysis is complete, the valve is switched and the regenerated column is ready for analytical use.

More applications .....pages 122-123


**CHEMINERT VALVES**

**15,000 psi UHPLC Nanovolume® selectors,  
1/32" Valco fittings, 150 micron ports (.006")**

*Model C75NX*

- 15,000 psi**
- Nanobore**
- Stream selector**
- 1/32"**
**150 µm**

Includes Valco stainless steel fittings.  
Manual version not available.  
Microelectric actuator:  
24 VDC, with 110/230 VAC to 24 VDC power supply.



**SPECS**

**15,000 psi liq**  
**50°C max**  
Stainless stator  
with inert coating  
Valcon E3 rotor

**OPTIONS**

- 100 micron (.004") bore
- 250 micron (.010") bore
- 10,000 and 20,000 psi versions available
- 4 positions

	<b>6 Position</b> <i>Prod No</i>	<b>8 Position</b> <i>Prod No</i>	<b>10 Position</b> <i>Prod No</i>
<b>Coated stainless stator</b>			
With air actuator	C75NX-6676A	C75NX-6678A	C75NX-6670A
With microelectric actuator	C75NX-6676EMH	C75NX-6678EMT	C75NX-6670EMT
Replacement valve	C75NX-6676D	C75NX-6678D	C75NX-6670D
Replacement rotor	C75N-66R6	C75N-66R8	C75N-66R0
Replacement stator	C75N-6C76	C75N-6C78	C75N-6C70



**Model C75NX**  
**1/32" Valco stainless fittings**

**10,000 psi UHPLC microbore selectors,  
1/16" Valco fittings, 0.25 mm ports (.010")**

Model C75H

**SPECS**


**10,000 psi liq  
50°C max**

Stainless stator  
with inert coating  
Valcon E3 rotor

**OPTIONS**

- 150 micron (.006") bore
- 15,000 psi version available
- 4 positions

Includes Valco stainless steel fittings.  
Manual version not available.  
Microelectric actuator:  
24 VDC, with 110/230 VAC to 24 VDC power supply.



10,000 psi	
Microbore	
Stream selector	
1/16"	0.25 mm

**Coated stainless stator**

With air actuator  
With microelectric actuator

Replacement valve  
Replacement rotor  
Replacement stator

**6 Position**  
*Prod No*

**8 Position**  
*Prod No*

**10 Position**  
*Prod No*

C75H-1676A  
C75H-1676EMH  
  
C75H-1676D  
C75-16R6  
C75-1C76

C75H-1678A  
C75H-1678EMT  
  
C75H-1678D  
C75-16R8  
C75-1C78

C75H-1670A  
C75H-1670EMT  
  
C75H-1670D  
C75-16R0  
C75-1C70



**Model C75H**  
1/16" Valco stainless fittings

**MORE INFORMATION**

- Actuators  
Air ..... page 196  
Microelectric ..... 192  
Universal ..... 193  
Materials  
Metals..... 254-255  
Polymers ..... 256  
Valve rotors..... 257  
Standoff assemblies ..... 205


**CHEMINERT VALVES**

**HPLC stream selector, 1/16" Valco ZDV fittings, 0.40 mm ports (.016")**

Model C5

- 5,000 psi**
- Stream selector**
- 10-32 ZDV**
- 1/16"**
**0.40 mm**

Includes nuts and ferrules.  
 Valves with metal stators have stainless steel nuts and ferrules of the stator material.  
 Valves with PEEK stators have PEEK nuts and ferrules.  
 Microelectric actuator:  
 24 VDC, with 110/230 VAC to 24 VDC power supply.



**SPECS**

- 5000 psi liq**
- 75°C max**
- Metal stator
- Valcon H rotor
- 5000 psi liq**
- 50°C max**
- PAEK stator
- Valcon E rotor

**OPTIONS**

- 2", 3", 4", and 6" standoffs
- Hastelloy C stator
- Optional 0.15 mm (.006") and 0.25 mm (.010") bores available
- Optional 0.75 mm (.030") bore for Prep HPLC available

	<b>4 Position</b> <i>Prod No</i>	<b>6 Position</b> <i>Prod No</i>	<b>8 Position</b> <i>Prod No</i>	<b>10 Position</b> <i>Prod No</i>
<b>N60 stainless stator</b>				
Manual	C5-2004	C5-2006	C5H-2008	C5H-2000
With air actuator	C5-2004A	C5-2006A	C5H-2008A	C5H-2000A
With microelectric actuator	C5-2004EMH	C5-2006EMH	C5H-2008EMT	C5H-2000EMT
Replacement valve	C5-2004D	C5-2006D	C5H-2008D	C5H-2000D
Replacement rotor	C5-20R4	C5-20R6	C5-20R8H	C5-20R0H
Replacement stator	C5-2C04	C5-2C06	C5-2C08H	C5-2C00H
<b>PAEK stator</b>				
Manual	C5-2344	C5-2346	C5H-2348	C5H-2340
With air actuator	C5-2344A	C5-2346A	C5H-2348A	C5H-2340A
With microelectric actuator	C5-2344EMH	C5-2346EMH	C5H-2348EMT	C5H-2340EMT
Replacement valve	C5-2344D	C5-2346D	C5H-2348D	C5H-2340D
Replacement rotor	C5-23R4	C5-23R6	C5-23R8H	C5-23R0H
Replacement stator	C5-2C44	C5-2C46	C5-2C48H	C5-2C40H
<b>Titanium stator</b>				
Manual	C5-2034	C5-2036	C5H-2038	C5H-2030
With air actuator	C5-2034A	C5-2036A	C5H-2038A	C5H-2030A
With microelectric actuator	C5-2034EMH	C5-2036EMH	C5H-2038EMT	C5H-2030EMT
Replacement valve	C5-2034D	C5-2036D	C5H-2038D	C5H-2030D
Replacement rotor	C5-20R4	C5-20R6	C5-20R8H	C5-20R0H
Replacement stator	C5-2C34	C5-2C36	C5-2C38H	C5-2C30H




**Model C5**  
**6 positions**  
**1/16" ZDV fittings**

**OPTIONAL FLOWPATH**

**Model C5F**, the flow-through version, is similar to the C5 but its non-selected streams continue flowing through individual outlets. 3, 4, and 5 positions are available.

Consult the factory for C5F prices and information.



**Model C5F**  
**schematic diagram**

**MORE INFORMATION**  
 Manifolds . . . . . page 33



**HPLC column selector system with 1/16" Valco ZDV fittings, 0.40 mm ports (.016")**

Model C5

**SPESCS**

5000 psi liq  
75°C max  
Metal stator  
Valcon H rotor

5000 psi liq  
50°C max  
PAEK stator  
Valcon E rotor

**OPTIONS**

- 2", 3", 4", and 6" standoffs
- Hastelloy C stator
- Optional 0.25 mm (.010") and 0.15 mm (.006") bores available
- Optional 0.75 mm (.030") bore for Prep HPLC available

The system comprises two stream selection valves mounted on a single modular universal actuator, which can be controlled manually, via remote logic level signal, or by RS-232 interface (RS-485 optional). (See plumbing diagram below.)

Includes nuts and ferrules.

Valves with stainless stators have stainless fittings.

Valves with PEEK stators have PEEK fittings.

Includes microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.

5,000 psi

Column selector system

10-32 ZDV

1/16" 0.40 mm



	6 Column Prod No	8 Column Prod No	10 Column Prod No
<b>N60 stainless stator</b>			
System	C5-2006EMTD	C5H-2008EMTD	C5H-2000EMTD
Replacement rotor	C5-20R6	C5-20R8H	C5-20R0H
<b>PAEK stator</b>			
System	C5-2346EMTD	C5H-2348EMTD	C5H-2340EMTD
Replacement rotor	C5-23R6	C5-23R8H	C5-23R0H

Contact factory for replacement valves and stators, as valves for dual drive assemblies have mirror image stators.

**RS-232 interface cable**

Prod No

I-22697

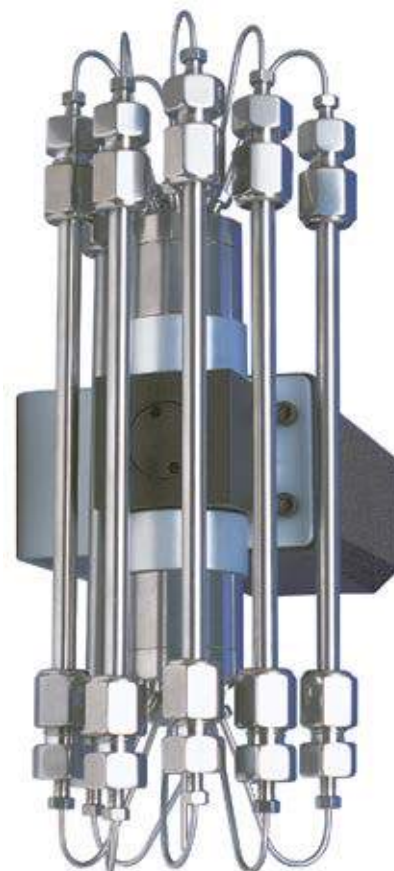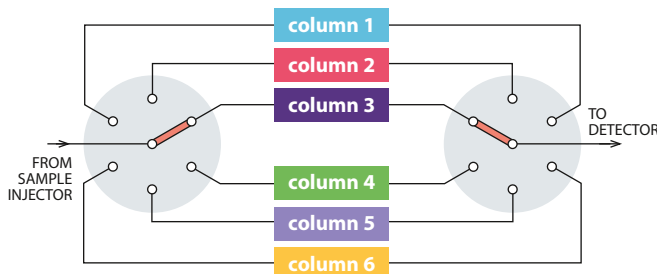

**Model C5 system**

Columns not included

**UHPLC COLUMN SELECTOR SYSTEMS**

Consult the factory for more information on UHPLC systems.

**ORDERING STATORS**

Valves for dual drive assemblies have mirror image stators. Consult Technical Support for correct product number before ordering.

Both valves use the same rotor.

**MORE INFORMATION**

- Actuators
- Air ..... page 197
  - Microelectric ..... 192
  - Universal ..... 193
- Materials
- Metals..... 254-255
  - Polymers ..... 256
  - Valve rotors..... 257
- Standoff assemblies ..... 205


**CHEMINERT VALVES**

**Stream selector, 1/16" Valco ZDV fittings, 0.75 mm ports (.030")**

Model C25Z

- Low pressure
- Stream selector
- 10-32 ZDV
- 1/16"
0.75 mm

Includes Valco ZDV PEEK nuts and ferrules.  
 Microelectric actuator:  
 24 VDC, with 110/230 VAC to 24 VDC power supply.



**SPECS**  
 100 psi gas/ 250 psi liq  
 75°C max  
 PPS stator  
 Valcon E2 rotor

- OPTIONS**
- 4 and 12 positions available
  - 2", 3", 4", and 6" standoffs
  - Other polymeric materials are available. Consult the factory.


	<b>6 Position</b> <i>Prod No</i>	<b>8 Position</b> <i>Prod No</i>	<b>10 Position</b> <i>Prod No</i>	<b>14 Position</b> <i>Prod No</i>
Manual	C25Z-3186	C25Z-3188	C25Z-3180	C25Z-31814
With air actuator	C25Z-3186A	C25Z-3188A	C25Z-3180A	C25Z-31814A
With microelectric act.	C25Z-3186EMH	C25Z-3188EMH	C25Z-3180EMH	C25Z-31814EMH
Replacement valve	C25Z-3186D	C25Z-3188D	C25Z-3180D	C25Z-31814D
Replacement rotor	C15-310	C15-310	C15-310	C25Z-325
Replacement stator	C25Z-386	C25Z-388	C25Z-380	C25Z-38-14



**Model C25Z**  
 10 positions  
 1/16" ZDV fittings

**OPTIONAL FLOWPATH**  
**Model C25ZF**, the flow-through version, is similar to the C25Z but its non-selected streams continue flowing through individual outlets, instead of being dead-ended. 3, 4, 5, 6, and 7 positions are available.

Consult the factory for C25ZF prices and information.



**CHEMINERT VALVES**

**Stream selector, 1/4-28 fittings for 1/16" tubing, 0.75 mm ports (.030")**

Model C25

**SPECS**


100 psi gas/ 250 psi liq  
75°C max  
PPS stator  
Valcon E2 rotor

**OPTIONS**

- 2", 3", 4", and 6" standoffs
- CTFE stator

Includes multicolored Cheminert 1/4-28 flangeless fittings for 1/16" tubing.

Microelectric actuator:  
24 VDC, with 110/230 VAC to 24 VDC power supply.



Low pressure  
Stream selector  
1/4-28 Internal  
1/16" 0.75 mm

	4 Position <i>Prod No</i>	6 Position <i>Prod No</i>	8 Position <i>Prod No</i>	10 Position <i>Prod No</i>
Manual	C25-3184	C25-3186	C25-3188	C25-3180
With air actuator	C25-3184A	C25-3186A	C25-3188A0	C25-3180A
With microelectric act.	C25-3184EMH	C25-3186EMH	C25-3188EMH	C25-3180EMH
Replacement valve	C25-3184D	C25-3186D	C25-3188D	C25-3180D
Replacement rotor	C25-314	C25-316	C15-310	C25-310
Replacement stator	C25-384	C25-386	C25-388	C25-380

**Stream selector, 1/4-28 fittings for 1/8" tubing, 1.50 mm ports (.060")**

Model C25

**SPECS**


100 psi gas/ 250 psi liq  
75°C max  
PPS stator  
Valcon E2 rotor

**OPTIONS**

- 2", 3", 4", and 6" standoffs
- CTFE stator

Includes multicolored Cheminert 1/4-28 flangeless fittings for 1/8" tubing.

Microelectric actuator:  
24 VDC, with 110/230 VAC to 24 VDC power supply.



Low pressure  
Stream selector  
1/4-28 Internal  
1/8" 1.50 mm

	4 Position <i>Prod No</i>	6 Position <i>Prod No</i>	8 Position <i>Prod No</i>	10 Position <i>Prod No</i>
Manual	C25-6184	C25-6186	C25-6188	C25-6180
With air actuator	C25-6184A	C25-6186A	C25-6188A	C25-6180A
With microelectric act.	C25-6184EMH	C25-6186EMH	C25-6188EMH	C25-6180EMH
Replacement valve	C25-6184D	C25-6186D	C25-6188D	C25-6180D
Replacement rotor	C25-614	C25-616	C25-618	C25-610
Replacement stator	C25-684	C25-686	C25-688	C25-680

**OPTIONAL FLOWPATH**

Model C25F is the flow-through version of C25. (See discussion on facing page.) 3, 4, 5, 6, and 7 positions are available.

Consult the factory for C25F prices and information.

**MORE INFORMATION**

- Actuators
- Air ..... page 196
  - Microelectric ..... 192
  - Universal ..... 193
- Materials
- Metals..... 254-255
  - Polymers ..... 256
  - Valve rotors..... 257
- Standoff assemblies ..... 205



Model C25  
10 position  
1/4-28 fittings

**CHEMINERT VALVES**


**Stream selector, 1/16" Cheminert fittings**

Model C25G

- Low pressure
- Stream selector
- 6-40 flat bottom
- 1/16"

Includes 6-40 PEEK nut/bushings for 1/16" OD tubing.  
 Available only with  
 microelectric actuator:  
 24 VDC,  
 with 110/230 VAC power supply.

*(For clarity, only eight of the twenty-four streams are illustrated.)*




**SPECS**  
 100 psi liq  
 50°C max  
 PEEK stator  
 Valcon M rotor

**OPTIONS**

- 2", 3", 4", and 6" standoffs
- Consult the factory for optional materials.

Bore:	20 Position 0.67 mm (.026") Prod No	24 Position 0.61 mm (.024") Prod No	28 Position 0.56 mm (.022") Prod No
With microelectric actuator	C25G-24520EMT	C25G-24524EMT	C25G-24528EMT
Replacement valve	C25G-24520D	C25G-24524D	C25G-24528D
Replacement rotor	C25G-24R20	C25G-24R24	C25G-24R28
Replacement stator	C25G-2C520	C25G-2C524	C25G-2C528

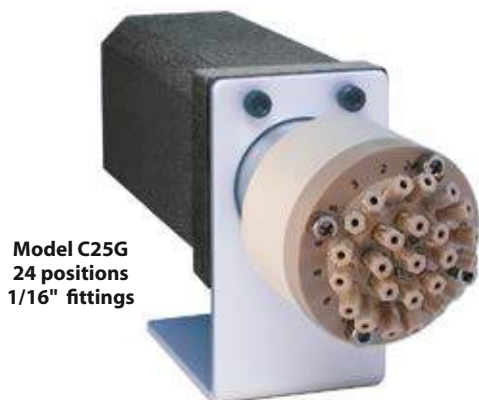


**Model C25G**  
 24 positions  
 1/16" fittings

**Fittings for C25G valves**

The C25G selector uses unique 6-40 fittings for flat-bottomed fitting details. As the fitting is tightened, the grooved area (supported by the stainless retainer) compresses enough to grip the tube for a low pressure connection.

- 6-40 one piece nut/bushing, natural PEEK, stainless retainer Prod No  
CNNF1PK
- Tightening tool CGFT




**OPTIONAL FLOWPATHS**

**Model C25G** valves select and isolate one of 20-28 streams, with the remainder dead-ended.

**Model C25GF**, the flow-through version, is similar to the C25G but its non-selected streams continue flowing through individual outlets. 10, 12, and 14 positions are available.

Call for pricing and information.

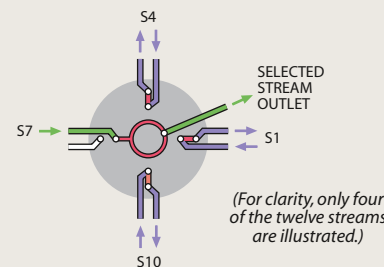

**Model C35ZF schematic**

**CHEMINERT VALVES**

**Stream selector, 1/2-20 fittings for 1/4" tubing, 4.6 mm ports (.180")**

Model C45


**SPECS**

100 psi liq  
50°C max  
PPS stator  
Valcon TF rotor

**OPTIONS**

- 2", 3", 4", and 6" standoffs
- Consult the factory for optional materials.
- 8 position selectors are available with 3 mm (.120") ports

Manual version not available.  
Includes Cheminert 1/2-20 flangeless fittings for 1/4" tubing, Delrin nuts, and CTFE ferrules.  
Microelectric actuator:  
24 VDC, with 110/230 VAC to 24 VDC power supply.



Low pressure
Stream selector
1/2-20 Internal
1/4" 4.6 mm


	4 Position Prod No	6 Position Prod No
With air actuator	C45-9784A	C45-9786A
With microelectric actuator	C45-9784EMT	C45-9786EMT
Replacement valve	C45-9784D	C45-9786D
Replacement rotor	C45-97R4	C45-97R6

**Fittings for C45 valves**

For additional 1/2-20 fittings and adapters, see page 72.



		Prod No
Nuts	CTFE	CFL-4KF
	Delrin	CFL-4D
	PPS	CFL-4PPS
Ferrules	CTFE	CFL-CB4KF-S
Plugs	CTFE	CP-4K
	Delrin	CP-4D

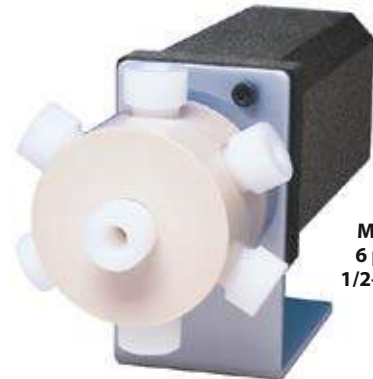

**Model C45  
6 positions  
1/2-20 fittings**

**MORE INFORMATION**

Actuators  
Air ..... page 196  
Microelectric ..... 192  
Universal ..... 193  
Materials  
Metals..... 254-255  
Polymers ..... 256  
Valve rotors..... 257  
Standoff  
assemblies ..... 205

**CHEMINERT VALVES ■ OEM**

**Integrated motor/valve,  
1/16" Valco fittings, 0.25 mm ports (.010")**

*Model C52*

**5,000 psi**

**Microbore**

**Integrated**

**1/16" 0.25 mm**

**CE ready\***

See page 151 for more information on Model C52 valves.  
**Also available in vertical port version.** Contact the factory.  
 Includes nuts and ferrules.

Valves with stainless stators have stainless fittings.  
 Valves with PEEK stators have PEEK fittings.



**4 Port**  
Prod No



**6 Port\***  
Prod No



**8 Port**  
Prod No



**10 Port**  
Prod No

**N60 stainless stator**

With integrated actuator	C52-1004I	C52-1006I	C52-1008I	C52-1000I
With motor/sensor only	C52-1004I-S	C52-1006I-S	C52-1008I-S	C52-1000I-S
With motor only	C52-1004IX	C52-1006IX	C52-1008IX	C52-1000IX
Replacement rotor	C2-10R4	C2-10R6	C2-10R8H	C2-10R0H
Replacement stator	C52-1C04	C52-1C06	C52-1C08	C52-1C00

**PEEK stator**

With integrated actuator	C52-1344I	C52-1346I	C52-1348I	C52-1340I
With motor/sensor only	C52-1344I-S	C52-1346I-S	C52-1348I-S	C52-1340I-S
With motor only	C52-1344IX	C52-1346IX	C52-1348IX	C52-1340IX
Replacement rotor	C2-13R4	C2-13R6	C2-13R8H	C2-13R0H
Replacement stator	C52-1C44	C52-1C46	C52-1C48	C52-1C40

**SPECS**

**5,000 psi liq**  
**40°C max**  
 N60 stainless stator  
 Valcon H rotor

**5,000 psi liq**  
**40°C max**  
 PEEK stator  
 Valcon E rotor

**OPTIONS**

- **Vertical port version.** (Model C52V)  
Contact the factory for more information.
- Optional 0.40 mm (.016") and 0.75 mm ports (.030") available
- Titanium and Hastelloy stators available
- Serial communication via RS-232 is available.

**\* CE READY**


Since these integrated VICI motor/valves are designed as components to be embedded into other systems, they do not include a power supply. They have been tested according to the following EMC Standards:  
 EN61326-1:2006  
 Conducted emissions  
 Radiated emissions  
 However, these results do not substitute for, preclude, or guarantee passage of any or all relevant compliance testing as required for a final product that includes these components.

**NOTE**

Cheminert high pressure valves with polymeric stators have a longer pilot depth.

**MORE INFORMATION**

Materials  
 Metals..... page 254-5  
 Polymers .....256  
 Valve rotors.....257

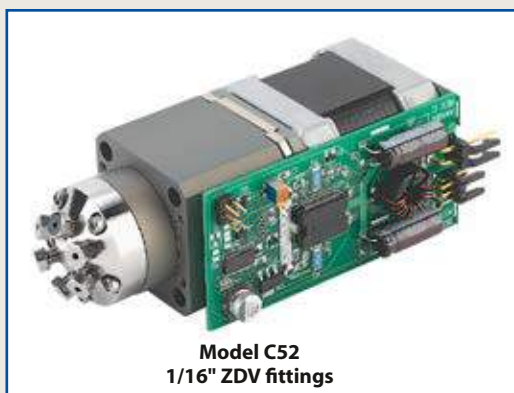

**Model C52**  
1/16" ZDV fittings



**Model C52V – vertical port version**  
(Contact the factory for info.)

**Sample loops** *for C52 injectors*

Each metal loop includes two stainless steel nuts and ferrules.  
 Each PEEK loop includes two PEEK nuts and ferrules.

Volume	Stainless Steel	PEEK (for PEEK stators)
	Prod No	Prod No
2 µl	CSL2	CZSL2PK
5 µl	CSL5	CZSL5PK
10 µl	CSL10	CZSL10PK
20 µl	CSL20	CZSL20PK
50 µl	CSL50	CZSL50PK
100 µl	CSL100	CZSL100PK
250 µl	CSL250	CZSL250PK
500 µl	CSL500	CZSL500PK
1 ml	CSL1K	CZSL1KPK
2 ml	CSL2K	CZSL2KPK
5 ml	CSL5K	CZSL5KPK
10 ml	CSL10K	—



**ABOUT LOOPS**

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, and PTFE (see pages 254-255).
- Metal loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.
- Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.

### Microbore centered port injector, 1/16" Valco fittings, 0.25 mm ports (.010")

Model C3

**SPECS**

**5000 psi liq**  
**75°C max**  
Metal stator  
Valcon H rotor

**5000 psi liq**  
**50°C max**  
PAEK stator  
Valcon E rotor

**OPTIONS**

- Titanium and Hastelloy stators available

Includes nuts and ferrules.  
Valves with stainless stators have stainless fittings.  
Valves with PAEK stators have PEEK fittings.  
Includes one 5 µl loop of the stator material.  
Includes syringe fill port for 22 gauge 3/4" and 2" needle.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.

**N60 stainless stator**

Prod No

**PAEK stator**

Prod No

Manual	C3-1006	C3-1346
With air actuator	C3-1006A	C3-1346A
With microelectric actuator	C3-1006EH	C3-1346EH
Replacement valve	C3-1006D	C3-1346D
Replacement rotor	C2-10R6	C2-13R6
Replacement stator	C3-1C06	C3-1C46



5,000 psi

Microbore

Centered port

1/16" 0.25 mm



**Model C3**  
1/16" ZDV fittings



Order loops  
from page 161.

**NOTE**

Cheminert high pressure valves with polymeric stators have a longer pilot depth.

### Microbore vertical port injector, 1/16" Valco fittings, 0.25 mm ports (.010")

Model C2V

**SPECS**

**5000 psi liq**  
**75°C max**  
Metal stator  
Valcon H rotor

**5000 psi liq**  
**50°C max**  
PAEK stator  
Valcon E rotor

**OPTIONS**

- Titanium and Hastelloy stators available

Includes nuts and ferrules.  
Valves with stainless stators have stainless fittings.  
Valves with PAEK stators have PEEK fittings.  
Includes one 5 µl loop of the stator material.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.

**N60 stainless stator**

Prod No

**PAEK stator**

Prod No

Manual	C2V-1006	C2V-1346
With air actuator	C2V-1006A	C2V-1346A
With microelectric actuator	C2V-1006EH	C2V-1346EH
Replacement valve	C2V-1006D	C2V-1346D
Replacement rotor	C2-10R6	C2-13R6
Replacement stator	C2V-1C06	C2V-1C46



5,000 psi

Microbore

Vertical port

1/16" 0.25 mm



**Model C2V**  
1/16" ZDV fittings



Order loops  
from page 161.

**CHEMINERT VALVES ■ OEM**

**Integrated motor/valve,  
1/16" Valco fittings, 0.40 mm ports (.016")**

Model C52

- 5,000 psi**
- Analytical**
- Integrated**
- 1/16" 0.40 mm**
- CE ready\***

See page 151 for more information on Model C52 valves.  
Includes nuts and ferrules.  
Valves with stainless stators have stainless fittings.  
Valves with PEEK stators have PEEK fittings, nuts and ferrules.



**4 Port**  
Prod No



**6 Port\***  
Prod No



**8 Port**  
Prod No



**10 Port**  
Prod No

**N60 stainless stator**

With integrated actuator	C52-2004I	C52-2006I	C52-2008I	C52-2000I
With motor/sensor only	C52-2004I-S	C52-2006I-S	C52-2008I-S	C52-2000I-S
With motor only	C52-2004IX	C52-2006IX	C52-2008IX	C52-2000IX
Replacement rotor	C2-20R4	C2-20R6	C2-20R8H	C2-20R0H
Replacement stator	C52-2C04	C52-2C06	C52-2C08	C52-2C00

**PEEK stator**

With integrated actuator	C52-2344I	C52-2346I	C52-2348I	C52-2340I
With motor/sensor only	C52-2344I-S	C52-2346I-S	C52-2348I-S	C52-2340I-S
With motor only	C52-2344IX	C52-2346IX	C52-2348IX	C52-2340IX
Replacement rotor	C2-23R4	C2-23R6	C2-23R8H	C2-23R0H
Replacement stator	C52-2C44	C52-2C46	C52-2C48	C52-2C40

**SPECS**

**5,000 psi liq**  
**40°C max**  
N60 stainless stator  
Valcon H rotor

**5,000 psi liq**  
**40°C max**  
PEAK stator  
Valcon E rotor

**OPTIONS**

- **Vertical port version.** (Model C52V)  
Contact the factory for more information.
- Optional 0.25 mm (.010") and 0.75 mm ports (.030") available
- Titanium and Hastelloy stators available
- Serial communication via RS-232 is available.

**\* CE READY**


Since these integrated VICI motor/valves are designed as components to be embedded into other systems, they do not include a power supply. They have been tested according to the following EMC Standards:  
EN61326-1:2006  
Conducted emissions  
Radiated emissions  
However, these results do not substitute for, preclude, or guarantee passage of any or all relevant compliance testing as required for a final product that includes these components.

**NOTE**

Cheminert high pressure valves with polymeric stators have a longer pilot depth.

**MORE INFORMATION**

Materials  
Metals..... page 254-5  
Polymers .....256  
Valve rotors.....257

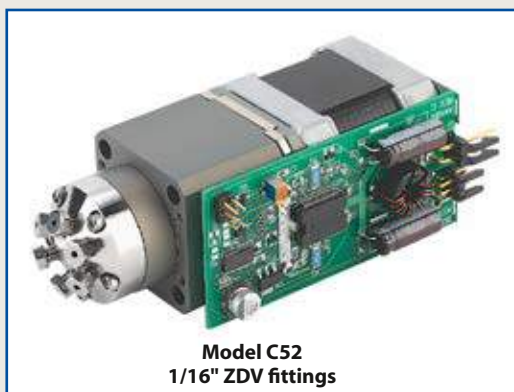

**Sample loops** *for C52 injectors*

Each metal loop includes two stainless steel nuts and ferrules.  
Each PEEK loop includes two PEEK nuts and ferrules.

Volume	Stainless Steel	PEEK (for PEEK stators)
	Prod No	Prod No
2 µl	CSL2	CZSL2PK
5 µl	CSL5	CZSL5PK
10 µl	CSL10	CZSL10PK
20 µl	CSL20	CZSL20PK
50 µl	CSL50	CZSL50PK
100 µl	CSL100	CZSL100PK
250 µl	CSL250	CZSL250PK
500 µl	CSL500	CZSL500PK
1 ml	CSL1K	CZSL1KPK
2 ml	CSL2K	CZSL2KPK
5 ml	CSL5K	CZSL5KPK
10 ml	CSL10K	—



**ABOUT LOOPS**

- Other materials available in many sizes: Electroformed Nickel, Hastelloy C, Nickel 200, and PTFE (see pages 254-255).
- Metal loops > 2 ml are made from 1/8" OD tubing with brazed or welded 1/16" tube ends or reducing unions.
- Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.



### Analytical centered port injector, 1/16" Valco fittings, 0.40 mm ports (.016")

Model C3

**SPECS**

**5000 psi liq**  
**75°C max**  
Metal stator  
Valcon H rotor

**5000 psi liq**  
**50°C max**  
PAEK stator  
Valcon E rotor

**OPTIONS**

- Titanium and Hastelloy stators available

Includes nuts and ferrules.  
Valves with stainless stators have stainless fittings.  
Valves with PAEK stators have PEEK fittings.  
Includes one 20 µl loop of the stator material.  
Includes syringe fill port for 22 gauge 3/4" and 2" needle.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.

**N60 stainless stator**

Prod No

**PAEK stator**

Prod No

Manual	C3-2006	C3-2346
With air actuator	C3-2006A	C3-2346A
With microelectric actuator	C3-2006EH	C3-2346EH
Replacement valve	C3-2006D	C3-2346D
Replacement rotor	C2-20R6	C2-23R6
Replacement stator	C3-2C06	C3-2C46



5,000 psi

Analytical

Centered port

1/16" 0.40 mm



**Model C3**  
1/16" ZDV fittings



Order loops  
from page 161.

**NOTE**

Cheminert high pressure valves with polymeric stators have a longer pilot depth.

### Analytical vertical port injector, 1/16" Valco fittings, 0.40 mm ports (.016")

Model C2V

**SPECS**

**5000 psi liq**  
**75°C max**  
Metal stator  
Valcon H rotor

**5000 psi liq**  
**50°C max**  
PAEK stator  
Valcon E rotor

**OPTIONS**

- Titanium and Hastelloy stators available

Includes nuts and ferrules.  
Valves with stainless stators have stainless fittings.  
Valves with PAEK stators have PEEK fittings.  
Includes one 20 µl loop of the stator material.  
Microelectric actuator: 24 VDC, with 110/230 VAC to 24 VDC power supply.

**N60 stainless stator**

Prod No

**PAEK stator**

Prod No

Manual	C2V-2006	C2V-2346
With air actuator	C2V-2006A	C2V-2346A
With microelectric actuator	C2V-2006EH	C2V-2346EH
Replacement valve	C2V-2006D	C2V-2346D
Replacement rotor	C2-20R6	C2-23R6
Replacement stator	C2V-2C06	C2V-2C46



5,000 psi

Analytical

Vertical port

1/16" 0.40 mm



**Model C2V**  
1/16" ZDV fittings



Order loops  
from page 161.

**CHEMINERT VALVES - OEM**

**Integrated motor/valve, 1/16" Valco ZDV fittings, 0.75 mm ports (.030")**

Model C62Z

- Low pressure
- Integrated
- 10-32 ZDV
- 1/16" 0.75 mm
- CE ready\*

Includes Valco ZDV PEEK nuts and ferrules.  
Sample loops are not included with valves. Order separately.



**4 Port**  
Prod No

With motor, sensor, & controller C62Z-3184I  
With motor and sensor only C62Z-3184I-S



**6 Port**  
Prod No

C62Z-3186I  
C62Z-3186I-S



**8 Port**  
Prod No

C62Z-3188I  
C62Z-3188I-S



**10 Port**  
Prod No

C62Z-3180I  
C62Z-3180I-S



**Model C62Z**  
1/16" ZDV fittings

**SPECS**

**100 psi gas/ 250 psi liq**  
**50°C max**  
PPS stator  
Valcon E2 rotor

**OPTIONS**

- Other polymeric rotors and stators are available
- Consult the factory for prices and information.
- Serial communication via RS-232 is available.

**\* CE READY**

Since these integrated VICI motor/valves are designed as components to be embedded into other systems, they do not include a power supply. They have been tested according to the following EMC Standards:  
EN61326-1: 2006  
Conducted emissions  
Radiated emissions  
However, these results do not substitute for, preclude, or guarantee passage of any or all relevant compliance testing as required for a final product that includes these components.

**Sample loops** *for Model C62Z*

Loops include PEEK nuts and ferrules. Loops less than 500 µl are made from 1/16" OD tubing; loops 500 µl or greater are made from 1/8" OD tubing with polymeric unions and 1/16" ends.

	FEP	PTFE	PEEK
Volume	Prod No	Prod No	Prod No
5 µl	CZSL5FEP	CZSL5TF	CZSL5PK
10 µl	CZSL10FEP	CZSL10TF	CZSL10PK
20 µl	CZSL20FEP	CZSL20TF	CZSL20PK
50 µl	CZSL50FEP	CZSL50TF	CZSL50PK
100 µl	CZSL100FEP	CZSL100TF	CZSL100PK
250 µl	CZSL250FEP	CZSL250TF	CZSL250PK
500 µl	CZSL500FEP	CZSL500TF	CZSL500PK
1 ml	CZSL1KFEP	CZSL1KTF	CZSL1KPK
2 ml	CZSL2KFEP	CZSL2KTF	CZSL2KPK



**ABOUT LOOPS**

- Sample loop shape and dimensions may vary from batch to batch due to fluctuations in tubing ID. Loop volume is controlled as closely as possible, but is not calibrated.

**MORE INFORMATION**

Materials  
Metals . . . page 254-255  
Polymers . . . . . 256  
Valve rotors. . . . . 257

**Integrated motor/valve, 1/4-28 fitting details for 1/16" tubing, 0.75 mm ports (.030")**

Model C62

**SPECS**

100 psi gas/ 250 psi liq  
75°C max  
PPS stator  
Valcon E2 rotor

**OPTIONS**

■ Serial communication via RS-232 is available.

**\* CE READY**

See note on facing page.

Includes multicolored Cheminert flangeless fittings for 1/16" tubing.  
Sample loops are not included with valves. Order separately.

Low pressure  
Integrated  
1/4-28 Internal  
1/16" 0.75 mm  
CE ready\*



**4 Port**  
Prod No



**6 Port**  
Prod No



**8 Port**  
Prod No



**10 Port**  
Prod No

With motor, sensor, & controller  
With motor and sensor only

C62-3184I  
C62-3184I-S

C62-3186I  
C62-3186I-S

C62-3188I  
C62-3188I-S

C62-3180I  
C62-3180I-S

**Integrated motor/valve, 1/4-28 fitting details for 1/8" tubing, 1.50 mm ports (.060")**

Model C62

**SPECS**

100 psi gas/ 250 psi liq  
75°C max  
PPS stator  
Valcon E2 rotor

**OPTIONS**

■ Serial communication via RS-232 is available.

**\* CE READY**

See note on facing page.

Includes multicolored Cheminert flangeless fittings for 1/8" tubing.  
Sample loops are not included with valves. Order separately.

Low pressure  
Integrated  
1/4-28 Internal  
1/8" 1.50 mm  
CE ready\*

4 Port		6 Port		8 Port	10 Port
Prod No	Prod No	Prod No	Prod No		
With motor, sensor, & controller	C62-6184I	C62-6186I	C62-6188I	C62-6180I	
With motor and sensor only	C62-6184I-S	C62-6186I-S	C62-6188I-S	C62-6180I-S	

**Sample loops**

for Model C62

Loops include flangeless fittings with natural color nuts.  
Loops less than 500 µl are made from 1/16" OD tubing;  
loops 500 µl or greater are made from 1/8" OD tubing.



Volume	FEP Prod No	PTFE Prod No	PEEK Prod No
20 µl	CFSL20FEP	CFSL20TF	CFSL20PK
50 µl	CFSL50FEP	CFSL50TF	CFSL50PK
100 µl	CFSL100FEP	CFSL100TF	CFSL100PK
250 µl	CFSL250FEP	CFSL250TF	CFSL250PK
500 µl	CFSL500FEP	CFSL500TF	CFSL500PK
1 ml	CFSL1KFEP	CFSL1KTF	CFSL1KPK
2 ml	CFSL2KFEP	CFSL2KTF	CFSL2KPK




**CHEMINERT VALVES ▪ OEM**

**Integrated motor/stream selector,  
1/16" Valco ZDV fittings, 0.40 mm ports (.016")**

*Model C55*

- 5,000 psi**
- Integrated**
- Stream selector**
- 10-32 ZDV**
- 1/16"**
**0.40 mm**
- CE ready\***

Includes nuts and ferrules.  
Valves with stainless stators have stainless fittings.  
Valves with PEEK stators have PEEK fittings.  
See Tech Tip, below.



**SPECS**

**5000 psi liq**  
**50°C max**  
Metal stator  
Valcon H rotor

**5000 psi liq**  
**50°C max**  
PEAK stator  
Valcon E rotor



**OPTIONS**

- Optional bore:  
0.25 mm (.010")  
0.75 mm (.030")
- 4 and 8 positions available

**\* CE READY**

Since these integrated VICI motor/valves are designed as components to be embedded into other systems, they do not include a power supply. They have been tested according to the following EMC Standards:  
EN61326-1:2006  
Conducted emissions  
Radiated emissions  
However, these results do not substitute for, preclude, or guarantee passage of any or all relevant compliance testing as required for a final product that includes these components.

	<b>4 Position</b> <i>Prod No</i>	<b>6 Position</b> <i>Prod No</i>	<b>8 Position</b> <i>Prod No</i>	<b>10 Position</b> <i>Prod No</i>
<b>N60 stainless stator</b>				
With integrated actuator Including RS-232 interface	C55-2004I C55-2004IA	C55-2006I C55-2006IA	C55-2008I C55-2008IA	C55-2000I C55-2000IA
With motor/sensor only	C55-2004I-S	C55-2006I-S	C55-2008I-S	C55-2000I-S
With motor only	C55-2004IX	C55-2006IX	C55-2008IX	C55-2000IX
Replacement rotor	C5-20R4	C5-20R6	C5-20R8H	C5-20R0H
Replacement stator	C55-2C04	C55-2C06	C55-2C08	C55-2C00
<b>PEAK stator</b>				
With integrated actuator Including RS-232 interface	C55-2344I C55-2344IA	C55-2346I C55-2346IA	C55-2348I C55-2348IA	C55-2340I C55-2340IA
With motor/sensor only	C55-2344I-S	C55-2346I-S	C55-2348I-S	C55-2340I-S
With motor only	C55-2344IX	C55-2346IX	C55-2348IX	C55-2340IX
Replacement rotor	C5-23R4	C5-23R6	C5-23R8H	C5-23R0H
Replacement stator	C55-2C44	C55-2C46	C55-2C48	C55-2C40

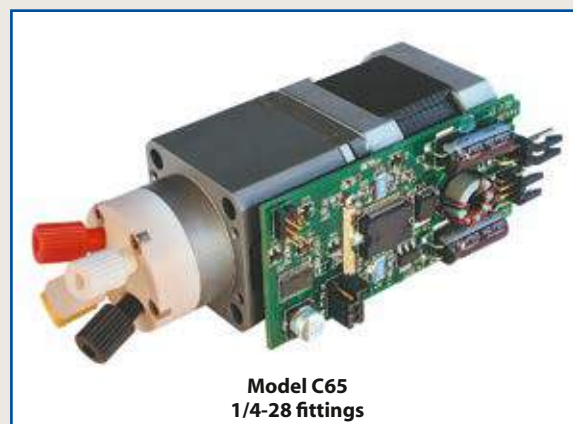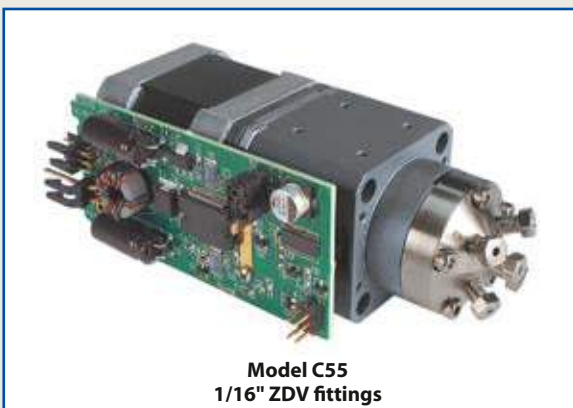

**TECH TIP**

For accurate port alignment, these integrated motor/stream selectors must be turned in one direction only. Factory setting is clockwise rotation, but it can be changed by a jumper setting. (See Technical Note TN-821 on vici.com)

**Integrated motor/stream selector,  
1/16" Valco ZDV fittings, 0.75 mm ports (.030")**

Model C65Z

**SPECS**


100 psi gas/ 250 psi liq  
50°C max  
PPS stator  
Valcon E2 rotor

**\* CE READY**

See note on facing page.

Includes Valco ZDV PEEK nuts and ferrules.

See Tech Tip on facing page.



Low pressure  
Integrated  
Stream selector  
10-32 ZDV  
1/16" 0.75 mm  
CE ready\*

	4 Position Prod No	6 Position Prod No	8 Position Prod No	10 Position Prod No
With integrated actuator	C65Z-3184I	C65Z-3186I	C65Z-3188I	C65Z-3180I
Including RS-232 interface	C65Z-3184IA	C65Z-3186IA	C65Z-3188IA	C65Z-3180IA
With motor and sensor only	C65Z-3184I-S	C65Z-3186I-S	C65Z-3188I-S	C65Z-3180I-S

**Integrated motor/stream stream selector,  
1/4-28 fittings for 1/16" tubing, 0.75 mm ports (.030")**

Model C65

**SPECS**


100 psi gas/ 250 psi liq  
50°C max  
PPS stator  
Valcon E2 rotor

**\* CE READY**

See note on facing page.

Includes multicolored Cheminert flangeless fittings for 1/16" tubing. See photo on facing page.

See Tech Tip on facing page.



Low pressure  
Integrated  
Stream selector  
1/4-28 Internal  
1/16" 0.75 mm  
CE ready\*

	4 Position Prod No	6 Position Prod No	8 Position Prod No	10 Position Prod No
With integrated actuator	C65-3184I	C65-3186I	C65-3188I	C65-3180I
Including RS-232 interface	C65-3184IA	C65-3186IA	C65-3188IA	C65-3180IA
With motor and sensor only	C65-3184I-S	C65-3186I-S	C65-3188I-S	C65-3180I-S

**Integrated motor/stream stream selector,  
1/4-28 fittings for 1/8" tubing, 1.50 mm ports (.060")**

Model C65

**SPECS**


100 psi gas/ 250 psi liq  
50°C max  
PPS stator  
Valcon E2 rotor

**\* CE READY**

See note on facing page.

Includes multicolored Cheminert flangeless fittings for 1/8" tubing. See photo on facing page.

See Tech Tip on facing page.



Low pressure  
Integrated  
Stream selector  
1/4-28 Internal  
1/8" 1.50 mm  
CE ready\*

	4 Position Prod No	6 Position Prod No	8 Position Prod No	10 Position Prod No
With integrated actuator	C65-6184I	C65-6186I	C65-6188I	C65-6180I
Including RS-232 interface	C65-6184IA	C65-6186IA	C65-6188IA	C65-6180IA
With motor and sensor only	C65-6184I-S	C65-6186I-S	C65-6188I-S	C65-6180I-S

# Actuators

## AND ACCESSORIES

Two position valves switch back and forth between Load and Inject, or Position A and Position B. Selectors operate in continuous revolutions by incremental steps. There are several ways to actuate each type of valve, along with a number of supporting controllers and devices to interface the actuators with computer-controlled systems.

With the exception of low pressure Cheminert selectors, we recommend that selectors be purchased with air or electric actuators. While a manual detent assembly is available, the higher turning torque of our other selector designs makes them more difficult to position accurately by hand.

### Manual Actuation

Simplicity and low cost are the main advantages of manual actuation. Some models can be ordered with position feedback, an option which sends a signal to start a data system when the valve is switched.

### Air Actuation

Air actuators are useful in situations where any spark could be disastrous or where there is no electricity available. They are small, relatively inexpensive, very rugged and dependable, and field serviceable. Low gas consumption and lightweight, compact construction make the air actuator suitable for aerospace flight hardware applications as well as laboratory or process applications.

With the addition of a DVI (digital valve interface) to translate the timed event signals into the necessary air pulses, air actuators can be automatically switched by a data system, integrator, or controller.



**Manual**  
page 204



**Air actuator**  
Two position, page 197  
Selector, page 196

### MORE INFORMATION

#### Actuators

Air . . . . . pages 196-197  
Microelectric . . . 190-192  
Modular universal . . 194  
Universal electric . . . 193

#### Mounting Hardware

Closemount  
assembly . . . . . 208  
Standoff  
assembly . . . . . 205

#### Controllers and Accessories

DVI . . . . . 199  
Digital valve interface  
HSSA . . . . . 198  
High speed switching  
accessory  
MSVA2 . . . . . 198  
Manifold 3-way  
solenoid valve  
assembly  
PFAF . . . . . 199  
Position feedback for  
air actuators  
RAD . . . . . 204  
Right angle drive  
Solenoid air valves . . . 198



## Electric Actuation



**Microelectric actuator**  
For two position valves, page 190

The **microelectric actuator** features automatic valve alignment, high-speed switching, compact size, 24 VDC power input, and reversible direction (in the selector model).

Microelectric actuators can be operated manually with a controller assembly that features position-indicating LEDs and a toggle switch, or can be easily connected to an external data system for fully automated control. Built-in multidrop RS-232 (RS-485 optional) facilitates bidirectional communications.

The new **universal actuator** operates virtually any Valco or Cheminert rotary valve – two position and selector alike – greatly simplifying the electronic aspect of instrument design. A manual controller is included; current interface options include RS232/485, USB, and BCD.

A **modular universal actuator**, also available, is fully backward-compatible with multiposition microelectric actuator models EMH and EMT. Like the universal actuator, it can also be used for two position valves.



**Microelectric actuator**  
For selectors, page 192



**Universal actuator**  
Two position and selectors, page 193



**Modular universal actuator**  
Two position and selectors, page 194



**Standoff assemblies**  
page 205

## Standoff Assemblies

All valves, no matter what their actuation mode, can be ordered with a standoff assembly. The standoff is an extension shaft mounted between the handle or actuator and the valve, allowing the valve to be installed within a heated zone while the actuator or handle remains outside at ambient temperature. The standoff extends through the oven wall, and is secured by a clamp ring supplied with the assembly. Standard standoff assembly lengths are 2", 3", 4", and 6". Other lengths can be special-ordered at additional cost.

## Right Angle Drive

Some installations don't allow the valve and actuator to be installed in a typical in-line configuration. The RAD (right angle drive) is a 90° gearbox which permits the actuator or handle to be installed at a right angle to the valve. The RAD fits all VICI electric and air actuators.



**Right angle drive**  
page 204

**ACTUATORS AND ACCESSORIES**

## Microelectric actuators for two position valves

- CE certified
- Automatic alignment via stall-sensing circuitry – no mechanical microswitches
- Manual remote control with position indication
- High speed switching – <100 ms in EQ model
- RS-232 bidirectional communication (switchable RS-485)
- Universal power supply, 110/230 VAC to 24 VDC



The two position microelectric actuator features exclusive stall-sensing circuitry which eliminates problems associated with valve/actuator misalignment. Power to the actuator motor is switched off when the driver pin goes against the stop of the valve cutout – no sooner, no later – and it’s all done without any mechanical microswitches. Not only does this mean that alignment problems are a thing of the past, it means that you can stock one actuator for valves that turn 30°, 36°, 45°, 60°, 90°, or anything in between.

During initialization, the valve rotates at moderate speed while the actuator waits to sense the stall. Once the rotation angle has been measured and confirmed by repetition, the angle is memorized and actuation takes place at maximum speed. Valve position memory is maintained even in the event of a power failure. There is nothing more to do unless you wish to install a valve with a different angle of rotation. In that event, cycling the actuator with no valve mounted sets up reinitialization.

Since different valve models have varying actuation torque requirements, there are five microelectric actuator models – EQ, EH, EP, ED, and ET. Consult the chart on the facing page to determine which model meets your requirements. When a valve and actuator are ordered at the same time, the proper actuator is supplied automatically.

An actuator can be specified with closemount hardware, with a standoff, or with just the standoff mounting hardware, if your valve already has a standoff. The microelectric actuator is designed for room temperature use, so valves which will be mounted in ovens require a standoff assembly to locate the actuator out of the heated zone.

The microelectric actuator consists of a control module, a stepper motor/gearbox assembly, a manual remote control, interconnecting cables, and a 110/230 VAC to 24 VDC power supply. The RS-232 interface cable, if required, must be ordered separately. (See facing page.)


### WHICH MODEL FOR WHICH TWO POSITION VALVE?

Fitting size	Valve type	Actuator model	Valve type	Actuator model
		<b>Valco GC</b>		<b>Valco HPLC</b>
1/32"	W	EH	W	EP
1/16"	W	EH	W	EP
1/16"	UW	ED	UW	ED
1/8"	UW	ED	UW	ED
1/4"	MW	ET	—	—

### Cheminert HPLC & Low Pressure

Model C72X	
8 and 10 ports	ED
All other valves	EH

### SPEED AND TORQUE: Inversely proportional

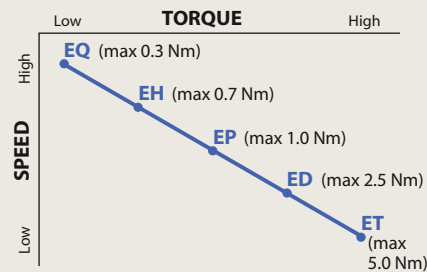

### Microelectric actuators

### for two position valves

Standard voltage 24 VDC. Includes autosensing 24 VDC power supply. Standoff version includes a 2" standoff. 3", 4", and 6" standoffs are also available. Consult the chart below left to determine which actuator model is best suited for your valve.

Description	With closemount assembly	With 2" standoff assembly	For use with existing standoff
	Prod No	Prod No	Prod No
Highest speed actuator	EQ	EQ2	EQS
High speed actuator	EH	EH2	EHS
Medium torque actuator	EP	EP2	EPS
High torque actuator	ED	ED2	EDS
Highest torque actuator	ET	ET2	ETS

### MORE INFORMATION

Closemount hardware...page 208  
 Microelectric actuators for selectors . . . . 192  
 Right angle drive . 204  
 Standoff assembly 205  
 Standoff mounting hardware . . . . . 205

### ORDER TIP

To purchase a **two position valve with a microelectric actuator installed**, see valve ordering information.  
 Valco injectors and valves . . . 98-117  
 Cheminert injectors and valves . 146-169, 181, 183




### RS-232 interface cable

Description	Prod No
RS-232 interface cable	I-22697

#### DAISY CHAIN CABLES

Daisy chain cables permit a single serial port (RS-232) to control multiple actuators – newer two position microelectric and universal.

See Technical Note 421 for further information..

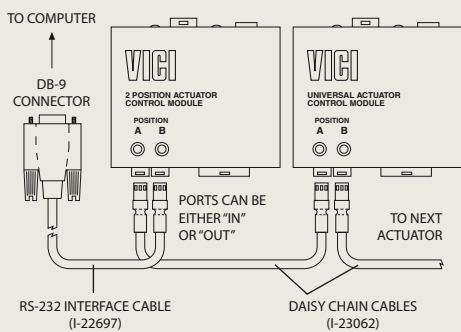

**NEW**

#### Daisy chain cables

for newer two position microelectric actuators and universal actuators

- More layout flexibility
- More economical than multi-drop configuration


The newly redesigned two position microelectric actuator controller on the facing page (differentiated by a plastic housing instead of a metal one) allows multiple units to be daisy-chained for control from a single serial port. Universal actuators with the RS232/485 option (page 193) can be included in the series, if desired. A chain of actuators requires only one RS-232 interface cable, plus a 3-pin daisy chain cable for each actuator – a more flexible and economical solution than the multi-drop cable application described below.

For lengths other than the 55 cm cable listed, please contact our technical support department. Note that cable lengths should be shorter than one meter for reliable RS-232 communication; longer lengths can affect the signal integrity.

Length	Prod No
55 cm	I-23062

#### MULTI-DROP CABLES

Multi-drop cables permit a single serial port (RS-232) to control multiple actuators – microelectric and universal.

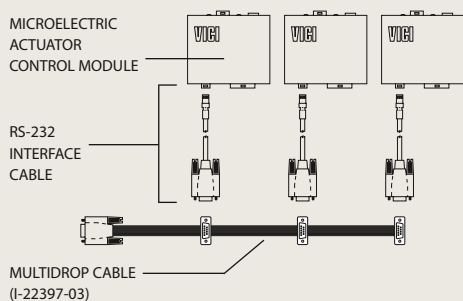

#### Multi-drop cables

for microelectric and universal actuators

- Work with all VICI microelectric and universal actuators (RS232/485 option)

Multi-drop cables permit a single serial port (RS-232) to control any combination of microelectric actuators (two position and multiposition, any vintage) and universal actuators with the RS232/485 option (page 193). These ribbon cables have one female DB9 and 2 to 8 male DB9 connectors, spaced at approximately 6".

Note: An RS-232 interface cable (I-22697), above, is required for **each** actuator.

No. of actuators to be controlled	Prod No
2	I-22897-02
3	I-22897-03
4	I-22897-04
5	I-22897-05
6	I-22897-06
8	I-22897-08

#### TECH TIP

Electric actuators can be directly controlled by signals from microprocessor-based instruments, data systems, or valve programmers, unlike air actuators, which require an interface to convert the signal to an air pulse.

#### MORE INFORMATION

Universal actuators . . . 193

#### Plug-and-play cables

for two position microelectric actuators

Plug-and-play cables will allow a direct connection and control between a specific instrument and the microelectric two position actuator. Contact technical support for other instruments.

Relay assembly	Prod No
Two position microelectric actuator to	
Agilent 6890 GC	V-RA-24VDC-HP6890
Agilent 7890 GC	V-RA-24VDC-HP6890
Varian 3800 GC	V-RA-24VDC-VA3800
Agilent 1100 LC	V-RA-5VDC-HP1100
Waters Alliance LC	V-RA-5VDC-WA2690

**ACTUATORS AND ACCESSORIES**

## Microelectric actuators for selectors

- CE certified
- Direction reversal
- Position indication
  - LED display
  - RS-232 output
  - BCD 5V negative true output
- Manual control
  - Step and home functions
  - Clockwise and counterclockwise functions
- Remote control
  - Step and home functions with contact closure
  - Direct position access with BCD 5V negative true input
  - Direct position access with RS-232 input (RS-485 optional)
- Automatic self-alignment with keyed valves and standoffs
- Universal power supply, 110/230 VAC to 24 VDC



One actuator can be used on any selector, from 2 to 96 positions – you tell the actuator how many stops to make through its 360° of rotation. So you can stock only one type of actuator even if you have 4, 6, 8, 10, 12, and 16 position valves. Valve position memory is maintained even in the event of a power failure. The direction reversal feature means that if a 6 position stream selection valve is on stream 1 and you select stream 6, you have the option of stepping “backwards” to stream 6 instead of passing through 2, 3, 4, and 5. The RS-232 input offers various commands like position

access, direction control, shortest route, etc. (The RS-232 cable must be ordered separately. *See below.*)

An actuator can be specified with closemount hardware, with a standoff, or with just the standoff mounting hardware, if your valve already has a standoff.

The microelectric actuator is designed for room temperature use. Valves which will be mounted in ovens require a standoff assembly, which locates the actuator out of the heated zone.

### Microelectric actuators

*for selectors*

Standard voltage 24 VDC. Includes autosensing 24 VDC power supply. Standoff version includes a 2" standoff. 3", 4", and 6" standoffs are also available. Consult the chart below to determine which actuator model is best suited for your valve.

Description	With keyed closemount assembly <i>Prod No</i>	With keyed 2" standoff assembly <i>Prod No</i>	For use with existing standoff <i>Prod No</i>
High speed actuator	EMH	EMH2	EMHS
High torque actuator	EMT	EMT2	EMTS

### RS-232 interface cable

Description	<i>Prod No</i>
RS-232 interface cable	I-22697

**TECH TIP**

Multi-drop cables permit a single serial port to control multiple actuators. In addition, we offer plug-and-play cables for direct connection of the actuator to a specific instrument.

- Multi-drop cables... 191
- Plug-and-play cables ..... 195

**ORDER TIP**

To purchase a **selector (multiposition valve) with a microelectric actuator installed**, see valve ordering information.

- Valco selectors ... pp 124-135
- Chemintert selectors ..... 172-179

**MORE INFORMATION**

- Closemount hardware ..... page 208
- Microelectric actuators for two position .... 190
- Right angle drive ..... 204
- Standoff assembly ..... 205
- Standoff mounting hardware ..... 205

**WHICH MODEL FOR WHICH INJECTOR / TWO POSITION VALVE?**

**Valco**

Fitting size	Valve type	Actuator model	Actuator model
		<b>GC</b>	<b>HPLC</b>
1/32"	W	EUH	EUH
1/16"	W	EUH	EUH
1/16"	UW	EUD	EUD
1/8"	UW	EUD	EUD
1/4"	MW	EUT	—

**Cheminert**

	Actuator model	Actuator model
	<b>HPLC</b>	<b>UHPLC</b>
4 and 6 ports *	EUH	EUH
8 and 10 ports	EUH	EUD
<b>Low pressure</b>		
All valves	EUH	

\*20,000 psi versions use EUD.

**WHICH MODEL FOR WHICH SELECTOR?**

**Valco**

	Actuator model
All valves	EUT

**Cheminert**

	Actuator model	Actuator model
	<b>HPLC</b>	<b>UHPLC</b>
4 and 6 position *	EUH	EUH
8 and 10 position	EUD	EUD
<b>Low pressure</b>		
Model C25 and C25Z	EUH	
Model C25G	EUD	
Model C45	EUT	

\* 20,000 psi versions use EUD.

**ABOUT STANDOFFS**

Keyed standoff assemblies are used with selectors on universal actuators, to key the valve body to the actuator and standoff so that the actuators can self-align and operate valves with any number of positions.

Valco selectors are not keyed unless ordered with a universal actuator. To install a universal actuator on an existing Valco selector, the key (pin) must be removed from the actuator clamp ring assembly. This can be done easily with a pair of pliers.

See page 207, top and bottom illustrations, for drawings of keyed standoff assemblies with modular universal actuators.

**MORE INFORMATION**

Cables . . . . .pages 191, 195  
 Closemount hardware . . . . .208  
 Right angle drive . . . . .204  
 Standoff assembly . . . . .205  
 Standoff mounting hardware . . . . .205

**NOTE**

Modular universal actuators, with the motor separated from the controller, offer the same features and functionality as the universal actuator. The modular configuration is often easier to incorporate into an instrument design.

Modular universal actuators for OEMs . . . . .194-5



**Universal actuators**

- CE certified
- One actuator works with two position valves *and* selectors
- Simplified, universal communication protocol
- Variety of interfaces
- Three versions for various valve torque requirements



Our universal actuators are truly universal – a single actuator can be used to operate a selector and later to operate a two position valve and back again, simply by changing simple settings.

Three universal actuator models – high speed, medium speed/medium torque, and high torque – cover our entire line of Valco and Cheminert valves and selectors, with their wide range of turning torques.

Actuators include a universal 24 VDC power supply and a manual controller. An OEM version that excludes these items is also available. The standard interface allows simple positioning commands – Step and Home for selectors, A and B for two position – via direct input signals from switch closures, relay contacts, or TTL-compatible interfaces. A more extensive command set is available with the optional RS232/485, USB, or BCD interfaces.

Note: while the actuators listed

below are universal, the valve mounting hardware is not. The product numbers shown do not include the hardware required for mounting a valve, since the necessary hardware depends on the valve type. If you are ordering the actuator for use with an *existing* valve, call our sales or technical staff to determine the correct hardware needed. If you want to order the universal actuator with a *new* valve, simply substitute the actuator product number in place of a different actuator and we'll provide the correct hardware.

**Universal actuators**

Standard voltage 24 VDC. Includes autosensing 24 VDC power supply. Does not include mounting hardware. Order separately.

	High speed (EUH)	Medium torque (EUD)	High torque (EUT)
Interface	Prod no	Prod no	Prod no
Standard	EUH	EUD	EUT
RS-232/485	EUHA	EUDA	EUTA
USB	EUHB	EUSB	EUTB
BCD	EUHC	EUDC	EUTC

**ACTUATORS AND ACCESSORIES**

**Modular universal actuators**

- CE certified
- Bidirectional
- Optional position indication
  - LCD display    BCD
  - RS-232/485    USB
- Compact stepper motor design
- Automatic self-alignment with keyed selector valves
- Variety of control modes with optional interfaces
  - Step and home functions with contact closure (*standard*)
  - Direct position access via BCD interface
  - Position access/confirmation via serial interface



The modular universal actuator allows instrument manufacturers to use a single motor and control software to operate virtually any Valco or Cheminert rotary valve. This actuator is a drop-in replacement for the previous microelectric multiposition actuator (part numbers EMH, EMT, etc.); the motor is identical, and the controller is the same size, with the same cable connections. And while the modular universal actuator perfectly mimics the microelectric's functionality, it packs even more features into the same small package.

This new version of the popular universal actuator makes it easier for the instrument manufacturer to work in the limited space frequently encountered in today's modern instruments. Plus, the modular design makes it possible to mount the more sensitive electronics module away from the liquid end of the valve.

Like the microelectric actuator, the modular universal actuator is bidirectional, and can be easily programmed to take the shortest

path during actuation. Position feedback is available via RS232/485 (switchable) or USB interfaces.

All Valco and Cheminert valves and selectors can be actuated by one of the three available versions: high speed, medium speed/torque, or high torque. The actuator includes a universal input 24 volt DC power supply and a manual controller with LCD display. An OEM version that excludes these and the motor mounting bracket is available at additional savings.

While the actuators listed here are universal, the valve mounting hardware is not. The product numbers shown do *not* include the hardware required to mount a valve, since the parts required depend on the valve type. If you are ordering a universal actuator with a *new* valve, the proper hardware is, of course, included. If you are ordering an actuator for use with an *existing* valve, call our technical support staff for help in acquiring the correct mounting hardware.

**NEW Modular universal actuators**    *for selectors and two position valves*

Standard voltage 24 VDC. Includes autosensing 24 VDC power supply. Consult the charts at left to determine which actuator model is best suited for your valve.

	<b>High speed</b>	<b>Medium torque</b>	<b>High torque</b>
<i>Interface</i>	<i>Prod no</i>	<i>Prod no</i>	<i>Prod no</i>
Standard	UMH	UMD	UMT
RS-232/485	UMHA	UMDA	UMTA
USB	UMHB	UMDB	UMTB
BCD	UMHC	UMDC	UMTC

**WHICH MODEL FOR WHICH INJECTOR / TWO POSITION VALVE?**

**Valco**

<i>Fitting size</i>	<i>Valve type</i>	<i>Actuator model</i>	<i>Actuator model</i>
		<b>GC</b>	<b>HPLC</b>
1/32"	W	UMH	UMH
1/16"	W	UMH	UMH
1/16"	UW	UMD	UMD
1/8"	UW	UMD	UMD
1/4"	MW	UMT	—

**Cheminert**

	<i>Actuator model</i>	<i>Actuator model</i>
	<b>HPLC</b>	<b>UHPLC</b>
4 and 6 ports *	UMH	UMH
8 and 10 ports	UMH	UMD
	<b>Low pressure</b>	
All valves	UMH	

\*20,000 psi versions use UMD.

**WHICH MODEL FOR WHICH SELECTOR?**

**Valco**

	<i>Actuator model</i>
All valves	UMT

**Cheminert**

	<i>Actuator model</i>	<i>Actuator model</i>
	<b>HPLC</b>	<b>UHPLC</b>
4 and 6 position *	UMH	UMH
8 and 10 position	UMD	UMD
	<b>Low pressure</b>	
Model C25 and C25Z	UMH	
Model C25G	UMD	
Model C45	UMT	

\* 20,000 psi versions use UMD.

**MOUNTING HARDWARE**

Closemount hardware.....	page 208
Right angle drive.....	204
Standoff assembly.....	205
Standoff mounting hardware.....	205


**RS-232 interface cable**

Description	Prod No
RS-232 interface cable	I-22697

**DAISY CHAIN CABLES**

Daisy chain cables permit a single serial port (RS-232) to control multiple actuators – newer two position microelectric and universal.

See Technical Note 421 for further information..

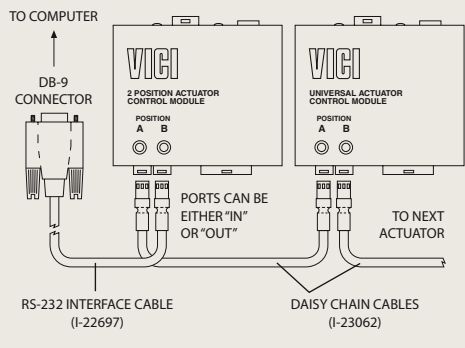

**NEW**

**Daisy chain cables** for universal actuators and newer two position microelectric actuators

- More layout flexibility
- Economical

Universal actuators with the RS232/485 interface option can be daisy-chained for control from a single serial port. The series can also include the redesigned two position microelectric actuator (page 191) if desired. A chain of actuators requires only one RS-232 interface cable, plus a 3-pin daisy chain cable for each actuator – a more flexible and economical solution than the multi-drop cable application described in the shaded box below.

For lengths other than the 55 cm cable listed, please contact our technical support department. Note that cable lengths should be shorter than one meter for reliable RS-232 communication; longer lengths can affect the signal integrity.

Length	Prod No
55 cm	I-23062

**Plug-and-play cables** for microelectric selector and universal actuators

Plug-and-play cables will allow a direct connection and control between a specific instrument and a microelectric or universal actuator. Contact technical support for other instruments.

BCD cable	Prod No
Modular universal actuator to	
Agilent 6890 GC	V-EMPMCR-HP6890
Agilent 6890 Network GC	V-EMPMCR-HP6890N
Agilent 7890 GC	V-EMPMCR-HP6890N

**For 4 and 6 column selector** \* (page 175)

Remote cable	Prod No
Modular universal actuator to	
Agilent 1100 LC	V-EMPMCR-HP1100
Waters Alliance LC	V-EMPMCR-WA2690

**For 8 and 10 column selector** \* (page 175)


Remote cable	Prod No
Modular universal actuator to	
Agilent 1100 LC	V-EMPMCR-HP1100-10
Waters Alliance LC	V-EMPMCR-WA2690-10

\* Requires a specific software setting in the actuator control module

**MULTI-DROP CABLES**

Multi-drop cables permit a single serial port (RS-232) to control multiple actuators. These ribbon cables work with all VICI microelectric and universal (RS232 option) actuators. Requires one RS-232 interface cable per actuator.

See page 191.

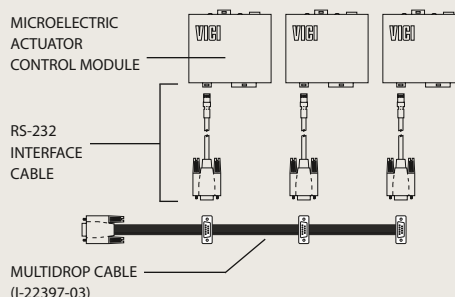

**MORE INFORMATION**

Microelectric actuators  
for two position . . . . 190  
for selectors . . . . . 192  
Universal actuators . . . 193

**ACTUATORS AND ACCESSORIES**

Air actuators offer reliable performance under the most stringent conditions. Low gas consumption and lightweight, compact construction make the air actuator suitable for aerospace flight hardware applications as well as laboratory or process applications.

The standard air actuator is rated for up to 80 psig at temperatures up to 70°C. Generally speaking, valves which will be heated require a standoff assembly, which locates the air actuator out of the heated zone and supports both the valve and actuator. A high temperature model permits both valve and actuator to be mounted within an oven (175°C maximum), but it is not recommended for use below 50°C.

**Air actuators for selectors**

The recommended method for implementing a selector (multi-position) air actuator requires only a single 4-way solenoid. Up to 80 psig may be used without damaging the valve or actuator. Bottled instrument air or nitrogen is recommended.

If plant air from compressors must be used, an oil separator and water dryer are required.

Multiposition air actuators include a rotary switch which may be connected to a digital readout of your own design.



**Standard air actuators**

*for selectors*

Temperature range 0-70°C

Standoff version includes a 2" standoff. 3", 4", and 6" standoffs are also available.

Description	With closemount assembly	With 2" standoff assembly	With standoff mounting hardware
	Prod No	Prod No	Prod No
4 position	A4	A42	A4S
6 position	A6	A62	A6S
8 position	A8	A82	A8S
10 position	A10	A102	A10S
12 position	A12	A122	A12S
16 position	A16	A162	A16S

**High temperature air actuators**

*for selectors*

Temperature range 50-175°C

Standoff version includes a 4" standoff. 2", 3", and 6" standoffs are also available.

Description	With closemount assembly	With 4" standoff assembly	With standoff mounting hardware
	Prod No	Prod No	Prod No
4 position	AT4	AT44	AT4S
6 position	AT6	AT64	AT6S
8 position	AT8	AT84	AT8S
10 position	AT10	AT104	AT10S
12 position	AT12	AT124	AT12S
16 position	AT16	AT164	AT16S

**Replacement O-rings**

Includes a complete set of O-rings for a multiposition air actuator.

Description	Prod No
Standard	ORMP
High temp	ORTMP



**TECH TIP**

The actuator's rotation must be properly matched to the valve's. If you are converting a manual valve to air actuation and have any doubts about which actuator and hardware you need, call our sales or technical staff for assistance.

**ORDER TIP**

To purchase a **valve with an air actuator installed**, go directly to valve ordering information.

**MORE INFORMATION**

PFAF ..... page 199  
Position feedback

**Mounting Hardware**

Closemount hardware ..... 208  
Right angle drive .... 204  
Standoff assembly .... 205  
Standoff mounting hardware ..... 205

## Air actuators for two position valves

The recommended method for implementing a two position air actuator is a manifold solenoid valve assembly (5-way three position solenoid air valve, *page 198*) that pulses air to the actuator to switch it from position to position. If air is applied continuously, the continuous rotational force applied to the valve can cause sideloading, leaking, and additional wear.

Typical actuation pressure is 40 to 50 psig, but up to 80 psig may be used. Ideally, only enough air

pressure should be used to switch the valve in 1/3 to 1/2 second. Bottled instrument air or nitrogen is recommended. If plant air from compressors must be used, an oil separator and water dryer are required.

A high speed switching accessory (HSSA) can upgrade valve switching times to less than 30 ms with air or 8 ms with helium. A position feedback (PFAF) with contact closures in both positions is also available as an option.

### TECH TIP

Here's what you'll get when you order:



Air actuator with a closemount assembly



Air actuator with a 4" standoff assembly



Air actuator for use with an existing standoff

### MORE INFORMATION

HSSA ..... page 199  
 High speed switching accessory  
 5-way three position solenoid air valve ... 198  
 PFAF ..... 199  
 Position feedback

### Standard air actuators

*for two position valves*

Temperature range 0-70°C

Standoff version includes a 4" standoff. 2", 3", and 6" standoffs are also available.

No. of ports in valve	Description	With closemount assembly	With 4" standoff assembly	For use with existing standoff
		Prod No	Prod No	Prod No
3,4	90° rotation	A90	A904	A90S
6	60° rotation	A60	A604	A60S
8	45° rotation	A45	A454	A45S
10	36° rotation	A36	A364	A36S
12	30° rotation	A30	A304	A30S

### High temperature air actuators

*for two position valves*

Temperature range 50-175°C

Standoff version includes a 2" standoff. 3", 4", and 6" standoffs are also available.

No. of ports in valve	Description	With closemount assembly	With 2" standoff assembly	For use with existing standoff
		Prod No	Prod No	Prod No
3,4	90° rotation	AT90	AT902	AT90S
6	60° rotation	AT60	AT602	AT60S
8	45° rotation	AT45	AT452	AT45S
10	36° rotation	AT36	AT362	AT36S
12	30° rotation	AT30	AT302	AT30S

### Replacement O-rings

Includes a complete set of O-rings for a two position air actuator.

Description	Prod No
Standard	OR
High temp	ORT



### Actuator compression fittings

Includes 1/8" compression to 10-32 male thread, plus 1/8" brass ferrule and hex nut.

	Prod No
3 piece fitting assembly	F-TCF



## ACTUATORS AND ACCESSORIES

### 4-Way solenoid air valve CE *for selector air actuators*

This 4-way solenoid air valve with 1/8" tube fittings is the simplest method of stepping a selector air actuator. Energizing the solenoid steps the valve to its next position, and de-energizing the solenoid resets the mechanical ratchet in the actuator. This implementation, not recommended for two position actuators, can be useful when only a limited number of external events is available on the data system.

	<i>Prod No</i>
110 VAC	V-SV-S52-110VAC
240 VAC	V-SV-S52-220VAC
24 VAC	V-SV-S52-24VAC
24 VDC	V-SV-S52-24VDC



### 3-Way solenoid air valve CE *for diaphragm valves*

This 3-way solenoid with 1/8" tube connections is perfect for switching spring-return valves such as our on/off or prime/purge valves (pages 212-213) or the DV22 diaphragm valves on pages 142-144. Energizing the solenoid provides air to the actuator, while removing power from the solenoid allows the valve to return to its original state. Use of this solenoid is not recommended for rotary valves.

	<i>Prod No</i>
110 VAC	V-SV-S32-110VAC
240 VAC	V-SV-S32-220VAC
24 VAC	V-SV-S32-24VAC
24 VDC	V-SV-S32-24VDC



### 5-Way three position solenoid air valve CE *for two position air actuators*

This 5-way solenoid air valves with 1/8" tube connections is recommended to switch two position air actuators. It applies air to the actuator only during switching and alleviates problems associated with continuous air pressure.

	<i>Prod No</i>
110 VAC	V-SV-S53-110VAC
240 VAC	V-SV-S53-220VAC
24 VAC	V-SV-S53-24VAC
24 VDC	V-SV-S53-24VDC



#### MORE INFORMATION Actuators

Air . . . . . pages 196-197  
 Microelectric . . . . . 190-192  
 Universal electric . . . . . 193

#### Mounting Hardware

Closemount  
 hardware . . . . . page 208  
 Right angle drive . . . . . 204  
 Standoff assembly . . . . . 205  
 Standoff mounting  
 hardware . . . . . 205





**DVI** Digital valve interface (Non-CE) *for two position air actuators*

We highly recommend the DVI for use with two position air actuators. It sends a two second pulse of air to switch the valve and then vents the air, simulating switching by hand and eliminating the potential for damaging the valve or actuator with continuously-applied pressure. It also features LED position indication, manual and remote operation, and a contact closure output on arrival to the INJECT position, a feature which can be used to start a run or integration. The DVI is available for 110 or 230 VAC.

*Prod No*

110 VAC	DVI
230 VAC	DVI-220



**HSSA** High speed switching accessory *for two position air actuators*

The HSSA is an add-on for our standard air actuators, providing increased air or helium flow for the fast actuation required in microbore chromatography or partial loop injections. Normal switching time for a C6W with 100 psi air is 180 ms. With the HSSA that drops to 20 ms; substitute 100 psi helium and the valve switches in 8 ms. Usually the HSSA is used in conjunction with the DVI above.

*Prod No*

HSSA



**PFAF** Position feedback *for two position air actuators*

The optional position feedback (PFAF) can be field installed on any two position standard air actuator. Each position provides a contact closure for TTL logic level signals.

*Prod No*

PFAF



**Position feedback** *for manual valves*

An optional position feedback is available for manual Valco W type and Cheminert C2 and C4 series valves (standard on Cheminert C1 valves). The continuous contact closure, provided only while the valve is in the inject position, can be used to start a chromatograph or data system.

*Description* *Prod No*

For Valco W type valves	
4 port	PFW90
6 port	PFW60
8 and 10 port	PFW36
For Cheminert valves	
C2 series except 4 port	PFC2
C2 series, 4 port	PFC4
C4 series	PFC4

## Purge housings

### ACTUATORS AND ACCESSORIES

Purge housings for Valco valves eliminate any possible diffusion from the atmosphere *into* the valve, or safely vent fugitive emissions *from* the valve. They are typically used in trace level analyses to isolate the valve from ambient air, but can also be used as a safety measure to isolate a valve against leaks into the atmosphere, such as when pyrophoric, toxic, or carcinogenic materials are present in the sample stream.

Two screws secure each half of the purge housing to the valve, so that the rear chamber of the housing (the preload assembly/spring side of the valve) can be removed for rotor inspection or replacement without affecting the actuator side of the housing.

Ideally, the purge housing should be ordered when a new valve is ordered, so that it can be factory-installed. Field installation of purge housings is generally not recommended. To order a new valve with a purge housing, add the suffix "PH" to the product number for the valve/actuator assembly. The purge housing requires a standoff assembly, which can be 2", 3", 4", or 6" long.

All Valco two position valves with two threaded mounting holes will accommodate a purge housing without modification. Some two position valves must be modified at the factory to accept the housing. The charge for modifying an existing valve includes the new purge housing. Call our service department to make arrangements for this service.



### Purge housings

*for two position valves and selectors*


Description	Prod No	Notes
On a new valve	Add suffix PH to valve prod no	Requires standoff assembly. Multiposition valve requires an actuator.
On existing valve, factory installation	Contact factory	
On existing valve, for field installation	Not recommended	

#### SPECS

**Maximum temperature:**  
175°C


Note: The purge housing limits the maximum temperature of the purged valve to 175°C, regardless of the valve specifications.

### PURGE HOUSING WITH VALVE

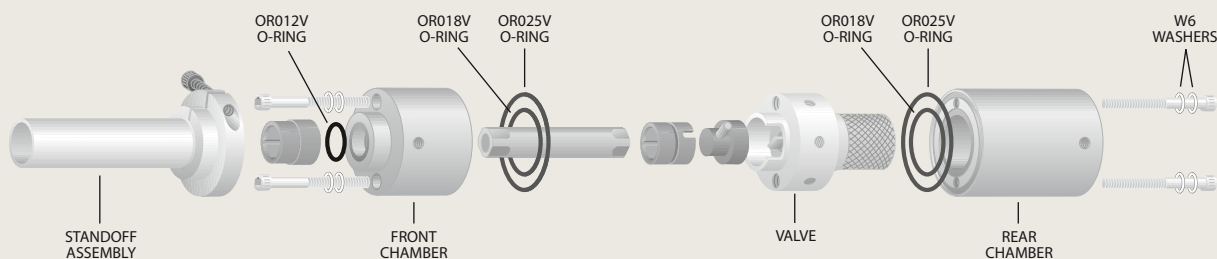

**HEATED VALVE ENCLOSURE**

For one valve (HVEA)

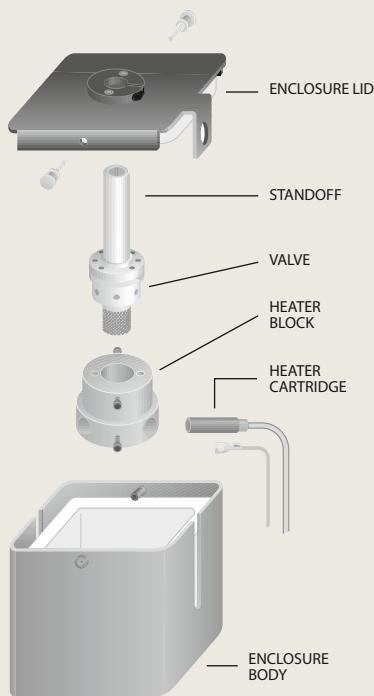

These insulated enclosures allow valves to be operated at temperatures independent of other controlled zones of analytical instruments. The compact construction and minimum power dissipation enable mounting within larger, lower temperature zones without significantly raising the larger oven's minimum temperature or impairing its programmability.

An insulated enclosure and a standard heater block are included. The product number chart lists the heater cartridge size typically required to heat the valve(s) to the indicated temperature. Holes are provided in the heater block for Perkin Elmer, Agilent, and other temperature sensors, with an additional thermocouple hole permitting temperature readout.

Since 1/32" W type valves are smaller, they require a special heater block; enclosures for 1/32" valves are denoted by asterisk (\*) in the price chart below.

**Note:** Heated valve enclosures provide a way to heat valves. A GC's auxiliary temperature zone controller or a device such as our ITC (instrumentation temperature controller) is required to maintain the valves at a set temperature.

Standard voltage: 110 VAC. For a 230 VAC model, add -220 to the product number. Insulation is 1/2" thick, so internal dimensions are 1" smaller than the exterior size given below.

**Heated valve enclosures (Non-CE) for two position valves and selectors**

Capacity	Exterior dimensions (Interior approx 1" smaller)	Rating	With heater cartridge Prod No	Without heater cartridge Prod No
1 valve	4" x 4-1/4" x 3-5/8"d	65W/350°C	HVEA	HVEAX
		* 65W/350°C	HVEAN	HVEANX
	4-1/4" x 5-1/8" x 3-5/8"d	65W/350°C	HVEB	HVEBX
		* 65W/350°C	HVEBN	HVEBNX
	8" x 8" x 6"d	100W/350°C	HVEC	HVECX
2 valves	8" x 5-1/4" x 4"d	125W/350°C	HVE2	HVE2X
3 valves	13-1/2" x 5-3/4" x 4"d	150W/350°C	HVE3	HVE3X
6 valves	13-3/4" x 8" x 6"d	300W/350°C	HVE6	HVE6X

\* for use with 1/32" valves



**MORE INFORMATION**

ITC ..... page 203  
Instrumentation temperature controller

Heated column enclosures .....203  
Heater assemblies .....202  
Heater blocks.....202

**ACTUATORS AND ACCESSORIES**

**Heater assemblies** (Non-CE)

A heater assembly includes a standard heater block, heater cartridge, and line cord. Heater cartridges are also available individually. Consult the factory for price and availability.

Standard voltage is 110 VAC. For a 230 VAC model, add -220 to the product number.

<i>Description</i>	<i>Rating</i>	<i>Prod No</i>
<b>Heater assembly</b>		
For use with HVEA or HVEB	65W/350°C	HA1
For use with HVEC	100W/350°C	HA1T
For use with HVE2	125W/350°C	HA2
For use with HVE3	150W/350°C	HA3
For use with HVE6	300W/350°C	HA6



**Heater blocks** *for single valves*

There are two single valve heater block designs: standard and low mass. The low mass heater block, which has a .075" diameter hole for sensor or thermocouple, works well for two position valves. The standard heater block is a high mass, multipurpose design which can be used with any Valco valve. It is designed so that sample loops or short columns can be wound directly on it.

Heater blocks do not include a heater cartridge.

<i>Description</i>	<i>Prod No</i>
Low mass heater block, 1 valve	HBS
Standard heater block, 1 valve	HB
Standard heater block, 1 NW Type valve (1/32" fittings)	HB1N



**Heater cartridges** *for single valve heater blocks*

The cartridge size is 1.5" long by 3/8" diameter. Consult the factory to purchase cartridges for larger heater blocks.

<i>Rating</i>	<i>Prod No</i>
65W 110 VAC	I-21208-32
65W 220 VAC	I-21208-33
100W 110 VAC	I-21208-05
100W 220 VAC	I-21208-06

**MORE INFORMATION**  
Heated valve enclosures . . . . . page 201



**Heated column enclosures**

(Non-CE)

Heated column enclosures allow a column to be operated at temperatures independent of other controlled zones in the instrument. They are similar in construction to our heated valve enclosures (page 201), except instead of a valve heater block they contain a column mandrel which will accept 1/8" columns up to 10' long. The HCE2 can have a heated valve installed adjacent to the heated column, with a valve heater block ordered separately.

Includes a column mandrel, an insulated enclosure, and a standard heater block, with or without the heater cartridge and line cord. Standard voltage: 110 VAC. For a 230 VAC model, add -220 to the product number. Insulation is 1/2" thick, so internal dimensions are 1" smaller than the exterior size given below.

Capacity	Exterior dimensions (Interior approx 1" smaller)	Rating	With heater cartridge Prod No	Without heater cartridge Prod No
<b>Heated column enclosure</b>				
1 column	4" x 4-1/4" x 3-5/8"d	65W/350°C	HCE1	HCE1X
	4-1/4" x 5-1/8" x 3-5/8"d	65W/350°C	HCEB	HCEBX
	8" x 8" x 6"d	65W/350°C	HCEC	HCECX
2 columns	8" x 5-1/4" x 4"d	65W/350°C	HCE2	HCE2X
<b>Column mandrel</b> (heater assembly not included with column mandrel)			Prod No	CM



**ITC Instrumentation temperature controller**

(Non-CE)

The ITC is an isothermal proportional controller for use in the thermal systems common to analytical instrumentation, and is often used with heated valve enclosures. The desired temperature is set in 1°C increments on the front panel. A thermocouple sensor provides quick recognition of temperature changes. The power to the heater can be attenuated from 0-90% in 10% increments, an easy-to-use feature which improves temperature stability at the set point to 0.5°C. Maximum output current is 10 amps.

The ITC is available with a range of 0°C to 399°C, in 110 VAC or 230 VAC.


		Prod No
0°C to 399°C	110 VAC	ITC10399
	230 VAC	ITC10399-220
Replacement thermocouple		I-21014-01

**ACTUATORS AND ACCESSORIES**

**Knobs and handles** *for use with a standoff*

Choose from theselection below if you already have a spare standoff assembly (see facing page) but lack the knob or retainer, or have an actuated valve on a standoff which you'd like to convert to manual use. Includes parts shown.

<i>Description</i>	<i>Prod No</i>
Knob for a W type valve	WMMASO
Knob for W/UW type valve	SOMAW
T-handle for a UW type valve	SOUTH
Handle for UW type valve	SOMAP
Handle with position feedback for W/UW type valve	SOMAPPF

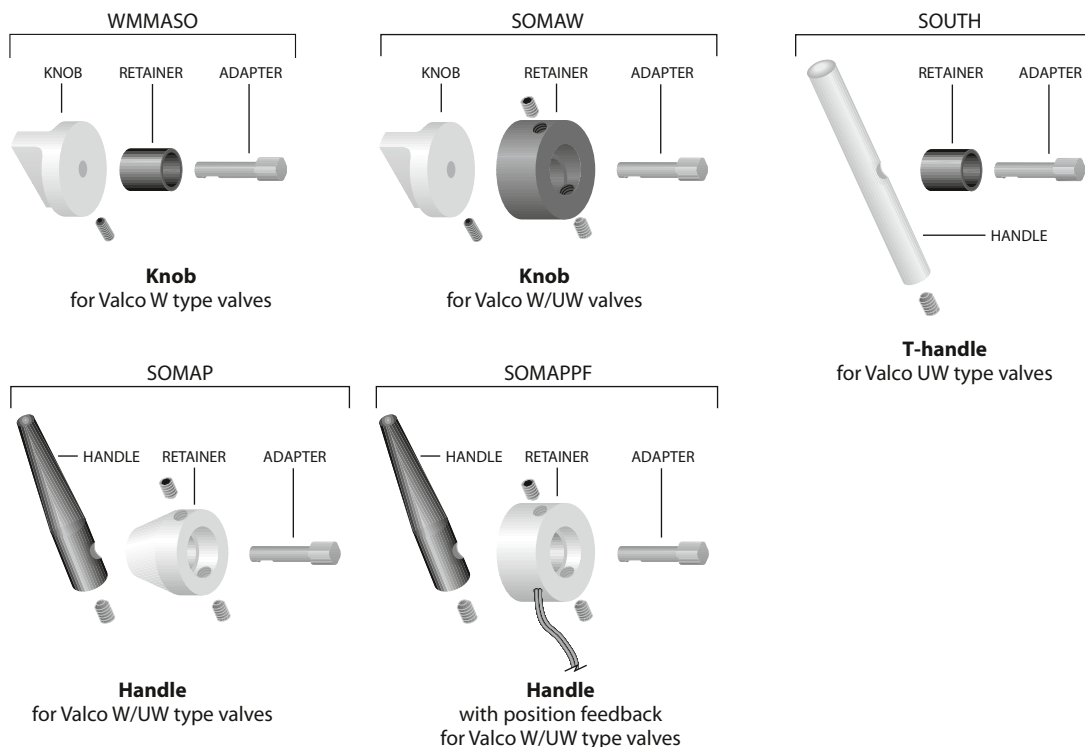

**RAD Right angle drive** *for two position actuators*

Some installations don't allow the valve and actuator to be installed in a typical in-line configuration. The RAD is a 90° gearbox which permits the actuator or handle to be installed at a right angle to the valve. The RAD fits all VICI two position electric and air actuators. Not for use with 1/4" valves. RAD with standoff includes a 2" standoff; 3", 4", and 6" standoffs are also available.

<b>With closemount hardware</b>	<b>With 2" standoff assembly</b>
<i>Prod No</i>	<i>Prod No</i>
RAD	2RAD



**TECH TIP**  
RADs add a slight amount of backlash and load. The backlash is not an issue with two position valves on microelectric or universal actuators, since the actuators locate and remember the stopping point. However, for two position valves on other actuators and for all selectors, we recommend that the valves have ports no smaller than .016".

The additional load may mean that a valve that ordinarily requires an ED actuator might require an ET when used with a right angle drive.

If you have any questions, please consult our technical support.



Valves which will be installed in ovens or heated zones require a standoff assembly, which locates the actuator out of the heated zone and supports both the valve and the handle or actuator. The 5/8" outside diameter standoff tube extends through the oven wall and is secured by means of a clamp ring supplied with the assembly.

If you are converting an actuated valve from a closemount to a standoff application, order the appropriate clamp ring and two screws in addition to the standoff assembly. Consult the factory for availability of non-standard lengths.

The microelectric actuator for selectors uses a special standoff assembly (SOMMP) which is keyed to both valve and actuator. The key guarantees proper alignment and positioning of the valve.

Product numbers show the most common length of standoffs: 4" for air actuators and manual knobs, 2" for microelectric and standard electric actuators. Standoff assemblies are available in lengths of 2", 3", and 6". To order a 6" standoff instead of a 4" one, change the 4 at the beginning of the product number to a 6.

### Standoff assemblies and mounting hardware

*for actuators*

	Standoff assembly <i>Prod No</i>	Clamp ring <i>Prod No</i>	Screws <i>Prod No</i>
<b>Air actuators</b>			
For Valco two position valves with 1 or 2 mounting holes	4SOA	CR3	HWSC-SC8-6
with no mounting holes	4SOAMP	CR3	HWSC-SC8-6
For Valco selectors	4SOAMP	CR3	HWSC-SC8-6
For Cheminert valves	4SOAMP	CR3	HWSC-SC8-6
<b>Microelectric actuators</b>			
For Valco two position valves with 1 or 2 mounting holes	2SOA	CR8	HWSC-SC8-8B
with no mounting holes	2SOAMP	CR8	HWSC-SC8-8B
For Valco multiposition valves (UW and MW Types only)	2SOAMMP	CR10	HWSC-SC8-8TDH
For Cheminert two position valves	2SOAMP	CR8	HWSC-SC8-8B
For Cheminert selectors	2SOAMMP	CR10	HWSC-SC8-8TDH
<b>Standard electric actuators</b>			
For Valco two position valves with 1 or 2 mounting holes	2SOA	CR3	HWSC-SC8-8B
with no mounting holes	2SOAMP	CR3	HWSC-SC8-8B
For Valco selectors	2SOAMP	CR3	HWSC-SC8-8B
For Cheminert valves	2SOAMP	CR3	HWSC-SC8-8B

#### TECH TIP

If you need the **actuator as well as the hardware**, you can order it complete with the appropriate hardware or with the required standoff already installed.

#### Actuators

Air ..... pages 196-7  
Microelectric .... 190-192  
Universal elec ..... 193

#### CONVERTING FROM CLOSEMOUNT TO A STANDOFF

If you are converting an actuated valve from a closemount to a standoff application, the clamp ring and screws which secure the standoff to the actuator are **not included** in the standoff assembly. Order clamp ring and screws in addition to the standoff assembly.

#### MORE INFORMATION

For illustrations of standoffs on valves and actuators, see pages 206 and 207.

### Standoff assemblies

*for manual valves*

Includes knob, standoff assembly, retainer, and adapter. For illustration, see page 206, top.


	<i>Prod No</i>
For Valco W and UW Type two position valves rated less than 5,000 psi	
with 1 or 2 mounting holes	4SOWK
with no mounting holes	4SOWKMP
For Valco UW Type two position valves rated 5,000 psi and higher	
with 1 or 2 mounting holes	4SOUTH
with no mounting holes	4SOUTHMP
For Cheminert valves	4SOWKMP



**ACTUATORS AND ACCESSORIES**


**Standoff with**

**VALCO TWO POSITION VALVE – MANUAL**

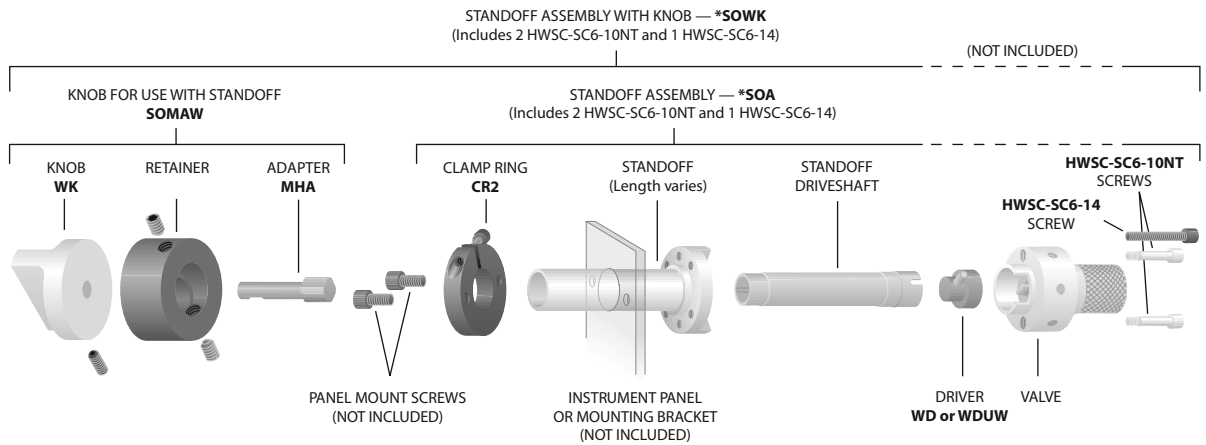


**Standoff with**

**VALCO TWO POSITION VALVE – AIR ACTUATOR**

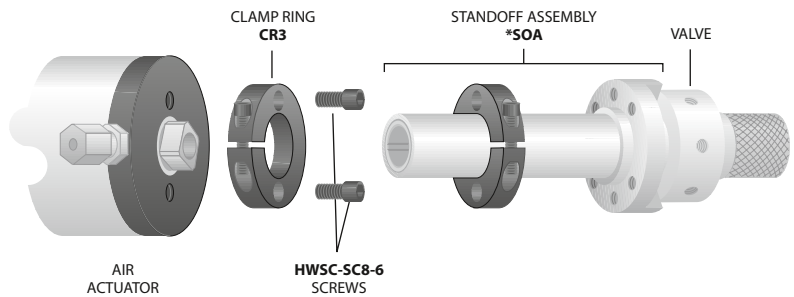


**Standoff with**

**VALCO SELECTOR – AIR ACTUATOR**

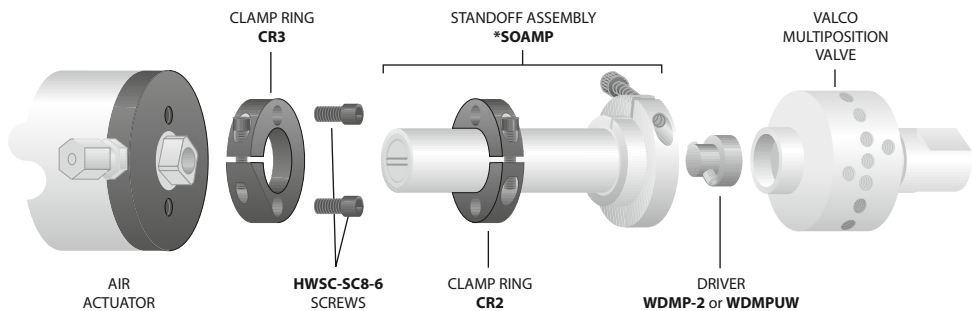





**Keyed standoff with  
VALCO SELECTOR – MICROELECTRIC, UNIVERSAL, OR MODULAR UNIVERSAL ACTUATOR**

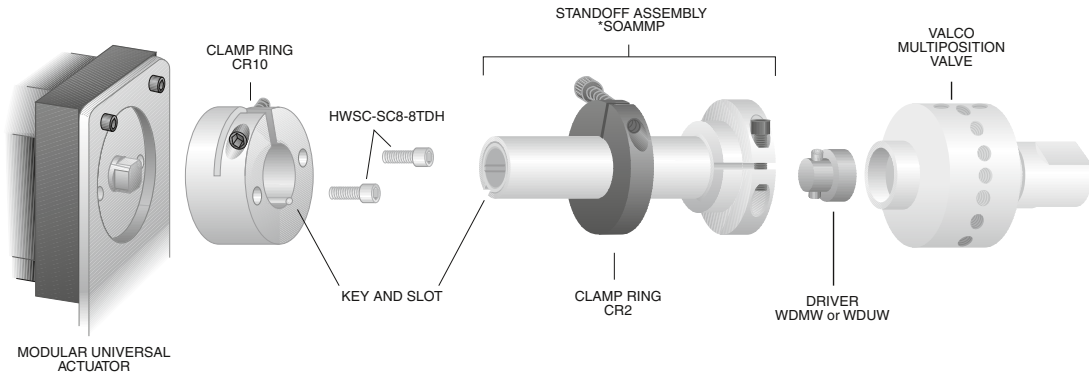

**Standoff with  
CHEMINERT TWO POSITION VALVE – MANUAL**

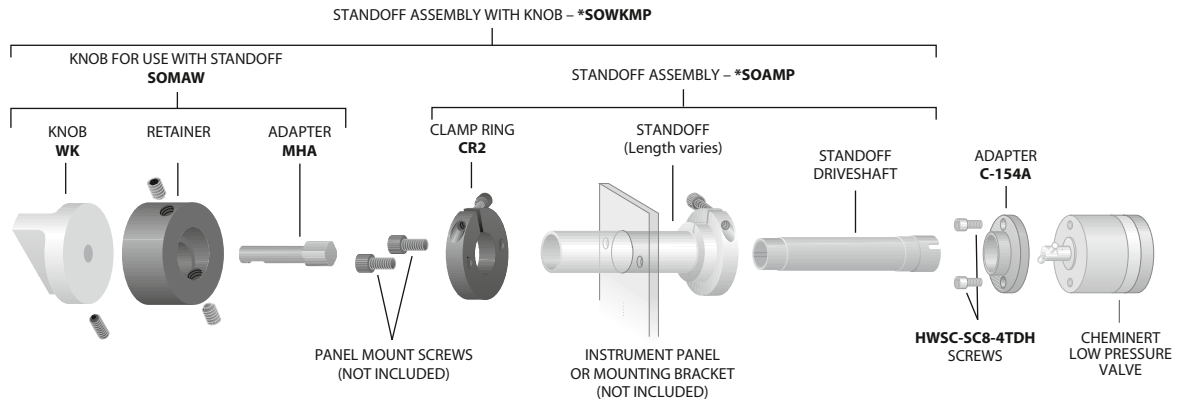

**Keyed standoff with  
CHEMINERT SELECTOR – MICROELECTRIC, UNIVERSAL, OR MODULAR UNIVERSAL ACTUATOR**

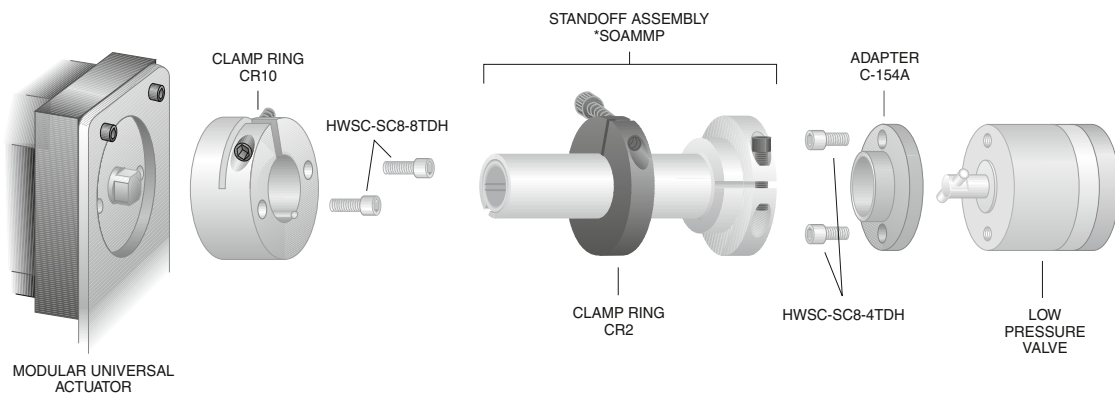

## Closemount hardware

### ACTUATORS AND ACCESSORIES

If a valve is not going to be heated beyond the temperature range of the actuator, closemount hardware often makes the cleanest installation.

#### Closemount hardware *for manual valves*

If you have a Valco W Type valve with no hardware and want a knob on it, or if you are converting an air or electrically actuated two position valve to manual use, this is what you need. There are two versions: one for valves with threaded mounting holes and one for valves with unthreaded mounting holes. (If your valve has no mounting holes, you will have to use it with a standoff.)

Description	Prod No
For valves with threaded mounting holes	WMMA
For valves with unthreaded mounting holes	WMMA10



#### Closemount hardware *for actuators*

Order the appropriate closemount hardware if you want to change your valve and actuator from a standoff to a closemount connection. Two mounting screws are included. If air and standard electric actuators require different mounting screws, two of each screw are included with the closemount hardware.

Description	Prod No
<b>Air or standard electric actuators</b>	
For Valco two position valves with 1 or 2 mounting holes	CMH
For Valco two position valves with no mounting holes	CMHMP
For Valco multiposition valves	CMHMP
For Cheminert valves high pressure design	CMH11H
For Cheminert valves low pressure design	CMH11L
(low pressure design includes required adapter)	



<b>Two position microelectric actuators</b>	
For Valco two position valves with 1 or 2 mounting holes	CMH12H
For Valco two position valves with no mounting holes	CMH12H
For Cheminert two position valves high pressure design	CMH12H
For Cheminert two position valves low pressure design	CMH12L
(low pressure design includes required adapter)	

<b>Universal and modular universal actuators</b>	
For Valco multiposition valves (UW and MW Types only)	CMH13
For Cheminert multiposition valves high pressure design	CMH13H
For Cheminert multiposition valves low pressure design	CMH13L
(low pressure design includes required adapter)	


#### TECH TIP

If you need the **actuator as well as the hardware**, you can order it complete with the appropriate hardware or with the required standoff already installed.


#### Actuators

Air . . . . . pages 196-197  
 Microelectric . . . . . 190-192  
 Modular universal . . . . . 194  
 Universal . . . . . 193


Closemount with  
VALCO VALVE – MANUAL

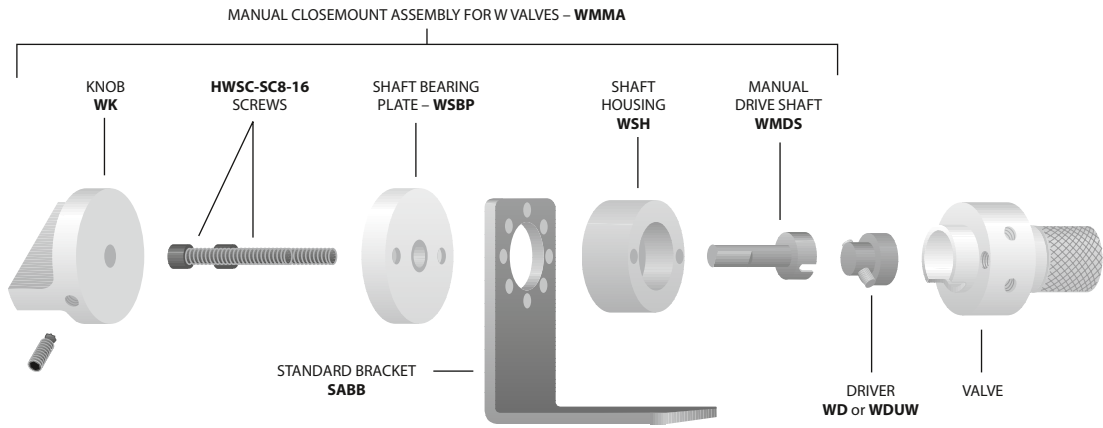

Closemount with  
CHEMINERT VALVE (Low pressure two position) – MICROELECTRIC

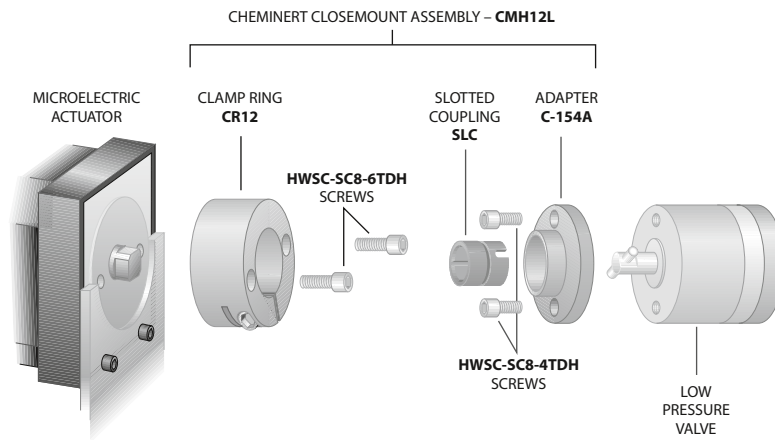

Closemount with  
VALCO VALVE (1 or 2 mounting holes) – AIR ACTUATOR

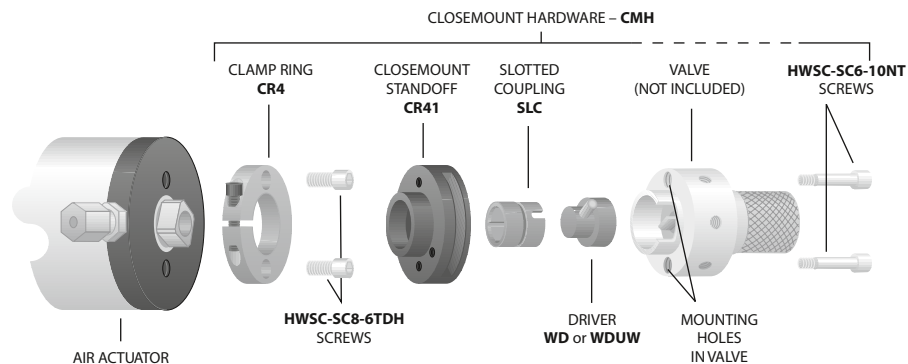

## ACTUATORS AND ACCESSORIES

As a convenience to our customers, we stock several standard tools that are useful for working with valves, fittings, and other products from VICI. In addition, we offer custom tools which are designed and machined in our factory to facilitate use of specific VICI products.

### Custom socket wrench

These socket wrenches with a slot to slip over the tubing are the perfect tool for installing fittings when proximity of the ports makes it difficult to get a normal open end wrench in position. The SWH3 fits the 3/16" hex head on our 1/32" ZDV fittings; the SWH4 works with the 1/4" hex nuts for 1/16" fittings.

Size	Prod No
3/16"	SWH3
1/4"	SWH4



### Hex key set

The hex key set has a wrench to fit any socket head screw on any VICI valve or actuator. Includes .050", 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", and 5/32" sizes.

Prod No
HKS



### Open end wrenches

Size	For use with	Prod No
3/16" x 1/4"	1/32" and 1/16" nuts	OEW
3/8" x 7/16"	1/8" nuts	OEW-2
1/2" x 9/16"	1/4" nuts	OEW-3



### Pencil magnet

A pencil-type magnet is useful for removing the rotor from Valco valves when the rotor must be replaced or rotated. The process of disassembly and assembly is described in Technical Note 201, which may be found in the support section at [www.vici.com](http://www.vici.com).

Prod No
PM



**MORE INFORMATION**  
 Ferrule removal kit... p 54

### Pin vise and drill index

The drill index has drills sized from 0.0135" to 0.039" (0.34 to 1 mm). These are useful tools when a fused silica tube breaks in a union, or for enlarging the inner diameter of fused silica adapters.

*Prod No*

PV



### Template

This tool is just what you need when you're working out plumbing and valve switching schematics. It features templates for two position valves with 4, 6, 8, and 10 ports with indications of both positions, as well as various flow symbols. For added convenience, the sides are edged with metric and inch rulers.

*Prod No*

TEMPLATE1



### Valve spanner handle

A special tool for gripping a multiposition valve body. It is especially useful during valve alignment procedures.

*Prod No*

VSH



### Mirror

Helpful to get access to valve serial numbers and to check discharge on pulsed discharge detectors (PDD).

*Prod No*

MR



# Control devices

## FLOW, PRESSURE, AND ON/OFF

This section includes stainless needle valves, our combination on/off needle valves, high pressure prime/purge and on/off valves, and VICI pressure regulators and flow controllers.

Because cast parts can introduce porosity and contamination, every VICI control device is assembled from components which are precision-machined from bar stock. This assures that every item has the same high quality workmanship, with careful assembly and testing to rigid standards.

### On/off and prime/purge valves

Valco high pressure on/off or prime/purge valves feature quality engineering, precision machining, and extremely low internal volume (< 2 µl), making them the ideal choice in the most demanding liquid or supercritical fluid chromatography or extraction systems.\* The on/off function is self-explanatory; in prime/purge models, mobile phase flows around the needle when the valve is closed, relieving the back pressure from the column. When the valve opens, mobile phase vents to waste to prime the pump. Standard models provide leak-tight operation up to 10,000 psi (690 bar) at 100°C, with high temperature versions rated up to 6,000 psi/300°C. A 1/16" fitting model with a larger bore and a 1/8" fitting model are available for high flow applications.

The valve needle is made from a special high strength alloy which is resistant even to the buffer salts which might accidentally precipitate inside the valve. Seals are fluorocarbon, with valve bodies machined from HPLC grade stainless steel, ensuring long lifetime in even the most demanding situations.

The on/off and prime/purge valves are available in manual or air/CO<sub>2</sub> actuated versions. The automated valves require a single three-way solenoid: application of 50 psi opens the valve; venting the air allows the spring to return the valve to the closed position.

*\*Not suitable for use with gases.*



#### ULTRA-HIGH PRESSURE 40K ON/OFF AND PRIME/PURGE VALVES

40,000 psi valves . . . . p 85



#### MORE INFORMATION

3-way solenoid . . . . p 198



On/off valves

for liquids

SPECS

Temp Pressure

Standard temperature / high pressure

1/16" 100°C 10,000 psi liq

High temperature / medium pressure

1/16" 300°C 6,000 psi liq  
1/8" 300°C 2,000 psi liq

Standard temperature/ high pressure

Manual Air actuated  
with 1" knob with 1" standoff

Fitting size	Bore	Prod No	Prod No
1/16"	0.50 mm	SFVO	ASFVO
	0.75 mm	SFVOL	ASFVOL

High temperature/ medium pressure

Manual Manual Air actuated Air actuated  
with 2" knob with 4" knob with 2" standoff with 4" standoff

Fitting size	Bore	Prod No	Prod No	Prod No	Prod No
1/16"	0.50 mm	SFVOHT	SFVOHT4	ASFVOHT	ASFVOHT4
	0.75 mm	SFVOLHT	SFVOLHT4	ASFVOLHT	ASFVOLHT4
1/8"	1.50 mm	-	-	ASFVO2HT	ASFVO2HT4

Prime/purge valves

for liquids

SPECS

Temp Pressure

Standard temperature / high pressure

1/16" 100°C 10,000 psi liq

High temperature / medium pressure

1/16" 300°C 6,000 psi liq  
1/8" 300°C 2,000 psi liq

Standard temperature/ high pressure

Manual Air actuated  
with 1" knob with 1" standoff


Fitting size	Bore	Prod No	Prod No
1/16"	0.50 mm	SFV	ASFV
	0.75 mm	SFVL	ASFVL

High temperature/ medium pressure

Manual Manual Air actuated Air actuated  
with 2" knob with 4" knob with 2" standoff with 4" standoff



Fitting size	Bore	Prod No	Prod No	Prod No	Prod No
1/16"	0.50 mm	SFVHT	SFVHT4	ASFVHT	ASFVHT4
	0.75 mm	SFVLHT	SFVLHT4	ASFVLHT	ASFVLHT4
1/8"	1.50 mm	-	-	ASFV2HT	ASFV2HT4

Air actuator option


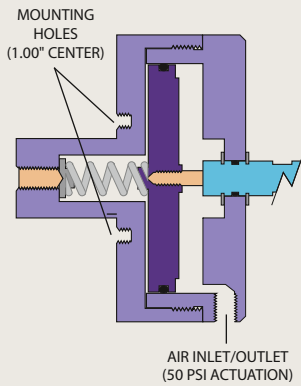


AN EAOR21 FITTING FOR 1/8" AIR SUPPLY TUBING IS INCLUDED. (SEE PAGE 216)

On/off valve



Prime/purge valve

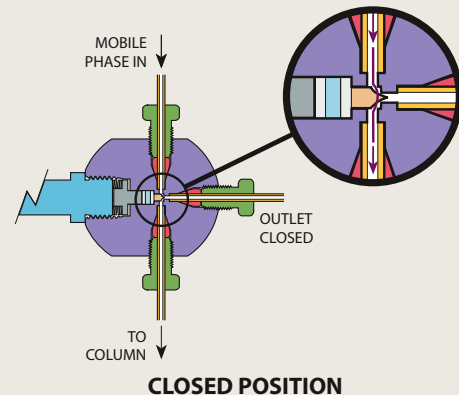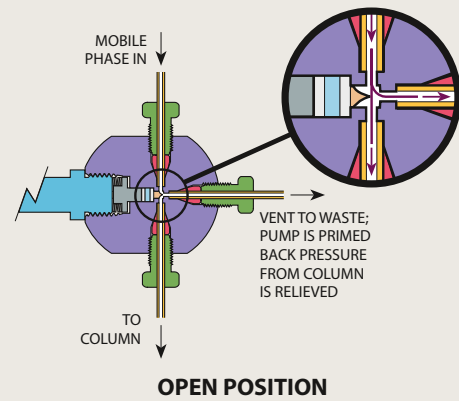

## Combo valves

### CONTROL DEVICES

A new generation needle and shut-off valve combines flow control and positive shut-off without damage to the needle. Since the flow setting is not changed by turning the valve on and off, the valve is ideal for providing hydrogen and air to an FID. It can also be used to supply make-up or combustion gas in a wide variety of applications.

Flow is set using the screwdriver adjustment in the center of the on/off knob.

The valve body materials are

anodized aluminum or stainless steel, with Viton® O-ring seals. Maximum temperature is 100°C, and maximum inlet pressure is 100 psig. The valve can be panel-mounted in an 11/16" or 3/4" hole, using hardware supplied, and all are supplied with Valco 1/16" ZDV fittings. Other configurations are available in OEM quantity upon request.

The standard knob is silver-colored and .62" long. Colored knobs for gas identification are available separately, in two lengths.

### Combo valves

**Maximum flow  
@ 40 psi He or N<sub>2</sub>**

10 ml/min  
50 ml/min  
150 ml/min  
  
250 ml/min  
500 ml/min

**Aluminum  
body**  
*Prod No*

CNV1A10S1  
CNV1A50S1  
CNV1A150S1  
  
CNV1A250S1  
CNV1A500S1

**Stainless  
body**  
*Prod No*

CNV1S10S1  
CNV1S50S1  
CNV1S150S1  
  
CNV1S250S1  
CNV1S500S1

#### SPECS

Inlet pressure:  
100 psi  
Maximum  
temperature:  
100°C


**Optional colored knobs Standard  
(.62")**  
*Prod No*

Green  
Red  
Blue  
  
Silver  
Black

CNVEKG  
CNVEKR  
CNVEKU  
  
CNVEKS  
CNVEKB

**Long  
(1.25")**  
*Prod No*

CNVEKLG  
CNVEKLR  
CNVEKLU  
  
CNVEKLS  
CNVEKLB

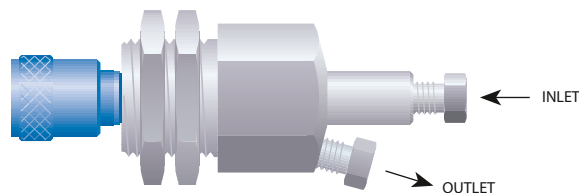



Very similar in function to the more recent design on the opposite page, these are the original, hex-bodied combo valves made by the Condyne division of VICI Metronics for nearly 30 years. Condyne products have been transferred to the Valco Houston location, where a number of improvements have been made.

Standard construction features an anodized aluminum body with Viton® O-ring seals. Maximum inlet pressure is 100 psi, with a maximum

temperature of 100°C. The valve can be panel mounted through an 11/16" or 3/4" diameter hole. Valco 1/16" fittings are standard, but 1/8" fittings are also available. Nuts and ferrules are included.

Typically, the knob color is used as an indicator of the rated flow, but the standard knob can be changed if desired. A longer version of the knob is also available, as is a nickel-plated all brass valve (in OEM quantities). Consult the factory regarding these options.

**Condyne combo valves**

SPECS	Maximum flow @ 40psi He or N2	Knob color	1/16"	1/8"
			Valco fittings Prod No	Valco fittings Prod No
Maximum inlet pressure: 100 psi	10 ml/min	Green	CVA10GS1	CVA10GS2
Maximum temperature: 100°C	50 ml/min	Red	CVA50RS1	CVA50RS2
	150 ml/min	Blue	CVA150US1	CVA150US2
	500 ml/min	Black	CVA500BS1	CVA500BS2
	1 liter/min	Yellow	CVA1KYS1	CVA1KYS2



# Gas flow controllers

## CONTROL DEVICES

Flow controllers provide a stable flow rate under varying pressure. VICI flow controllers are precision machined from aluminum or stainless bar stock to eliminate the contamination often found in die cast parts. Positive flow

shut-off is provided by an integral Viton-sealed adjustment valve.

With all our flow controllers, the inlet pressure must exceed the outlet pressure by a minimum of 10 psi.

### WHICH KIND OF CONTROLLER?

An **upstream-referenced** controller maintains the flow rate as long as the upstream (inlet) pressure is held constant.

A **downstream-referenced** controller maintains a constant flow under constant downstream (outlet) pressure.

### Model 100 gas flow controller

### Fixed span upstream-referenced flow controller

The Model 100 is available in a variety of preset maximum flow rates, from 150 mL/min to 10 liters/min (N<sub>2</sub> at 40 psi). Any flow controller in this series can be ordered with a 10-turn Spectrol digital dial (3 or 4 digits), to permit a visual indication of the flow setting.

All flow rates listed below are based on N<sub>2</sub> at 40 psi inlet pressure. Maximum inlet pressure is 200 psi.



### SPECS

#### Preset max flow rates:

150 mL/min to 10 liters/min (N<sub>2</sub> at 40 psi).

#### Maximum inlet pressure:

200 psi

#### Maximum temperature:

100°C

#### Standard fittings:

■ 1/8" external tube fittings (EAOR22)

Other fittings are available. (See below.) Contact the factory for further information.

Flow rate /min	Aluminum body Viton diaphragm Prod No	Aluminum body SS diaphragm Prod No	SS body Viton diaphragm Prod No	SS body SS diaphragm Prod No
<b>With standard control knob</b>				
0 - 150 mL	FC10AV1K	FC10AS1K	FC10SV1K	FC10SS1K
0 - 250 mL	FC10AV2K	FC10AS2K	FC10SV2K	FC10SS2K
0 - 850 mL	FC10AV3K	FC10AS3K	FC10SV3K	FC10SS3K
0 - 1.2 L	FC10AV4K	FC10AS4K	FC10SV4K	FC10SS4K
0 - 4.5 L	FC10AV5K	FC10AS5K	FC10SV5K	FC10SS5K
0 - 10.0 L	FC10AV6K	FC10AS6K	FC10SV6K	FC10SS6K
<b>With Spectrol 3-digit dial</b>				
0 - 150 mL	FC10AV1S3	FC10AS1S3	FC10SV1S3	FC10SS1S3
0 - 250 mL	FC10AV2S3	FC10AS2S3	FC10SV2S3	FC10SS2S3
0 - 850 mL	FC10AV3S3	FC10AS3S3	FC10SV3S3	FC10SS3S3
0 - 1.2 L	FC10AV4S3	FC10AS4S3	FC10SV4S3	FC10SS4S3
0 - 4.5 L	FC10AV5S3	FC10AS5S3	FC10SV5S3	FC10SS5S3
0 - 10.0 L	FC10AV6S3	FC10AS6S3	FC10SV6S3	FC10SS6S3
<b>With Spectrol 4-digit dial</b>				
0 - 150 mL	FC10AV1S4	FC10AS1S4	FC10SV1S4	FC10SS1S4
0 - 250 mL	FC10AV2S4	FC10AS2S4	FC10SV2S4	FC10SS2S4
0 - 850 mL	FC10AV3S4	FC10AS3S4	FC10SV3S4	FC10SS3S4
0 - 1.2 L	FC10AV4S4	FC10AS4S4	FC10SV4S4	FC10SS4S4
0 - 4.5 L	FC10AV5S4	FC10AS5S4	FC10SV5S4	FC10SS5S4
0 - 10.0 L	FC10AV6S4	FC10AS6S4	FC10SV6S4	FC10SS6S4

### ADAPTERS USED FOR VALCO AND CONDYNE CONTROL DEVICES

Description		Prod No	Used for
Valco 1/16" internal to	10-32 O-ring seal	ZAOR11	Diaphragm valve On/off valves (optional)
	5/16-24 O-ring seal	ZAOR12	Model 100 controller (optional) Model 300 controller (optional)
Valco 1/8" internal to	5/16-24 O-ring seal	ZAOR22	Model 100 controller (optional) Model 300 controller (optional)
External 1/8" to	10-32 O-ring seal	EAOR21	Air actuated prime/purge and on/off valves
	5/16-24 O-ring seal	EAOR22	Model 100 controller (standard) Model 300 controller (standard)

### ALTERNATE FITTING TYPES

#### Models 100 and 300

The standard is the EAOR22 1/8" external tube fitting. Alternative fitting types are ZAOR22 and ZAOR12, listed at left. Order separately.

#### Model 202

The standard 1/8" NPT female pipe thread with pipe adapters to 1/16" OD tubing included. To use 1/8" OD tubing, order PZA22 on page 35.

**Model 202 gas flow controller**

*Adjustable span upstream-referenced flow controller*

**SPECS**

**Flow range:**

infinitely adjustable

Min: 5 mL/min

Max: 1.6 L/min  
(N<sub>2</sub> at 40 psi)

**Maximum inlet pressure:**

200 psi

**Maximum temperature:**

100°C

**Standard fittings:**

■ 1/8" NPT female pipe threads

■ Pipe adapters to 1/16" OD tubing are included.

Other fittings are available. (See facing page.)

The Model 202 provides a user-variable span adjustment permitting it to be used for a variety of flow ranges. After the span is adjusted, the flow controller has a full 10 turns of resolution between the minimum and maximum flow rates. When equipped with a Spectrol digital dial, settings are reproducible to better than 1%.



	<b>Aluminum body Viton diaphragm</b> <i>Prod No</i>	<b>Aluminum body SS diaphragm</b> <i>Prod No</i>	<b>SS body Viton diaphragm</b> <i>Prod No</i>	<b>SS body SS diaphragm</b> <i>Prod No</i>
<b>With standard control knob</b>	FC22AV1K	FC22AS1K	FC22SV1K	FC22SS1K
<b>With Spectrol 3-digit dial</b>	FC22AV1S3	FC22AS1S3	FC22SV1S3	FC22SS1S3
<b>With Spectrol 4-digit dial</b>	FC22AV1S4	FC22AS1S4	FC22SV1S4	FC22SS1S4

**Model 300 gas flow controller**

*Fixed span downstream-referenced flow controller*

**SPECS**

**Maximum flow rate:**

1.6 L/min  
with ambient  
downstream pressure

**Maximum inlet pressure:**

200 psi

**Maximum temperature:**

100°C

**Standard fittings:**

■ 1/8" external tube fittings (EAOR22)

Other fittings are available. (See facing page.) Contact the factory for further information.

The Model 300 flow controller provides a stable flow rate when upstream pressure conditions vary, providing the downstream pressure remains constant.

All flow rates listed below are based on N<sub>2</sub> at 40 psi inlet pressure. Maximum inlet pressure is 200 psi.



	<b>Aluminum body Viton diaphragm</b> <i>Prod No</i>	<b>Aluminum body SS diaphragm</b> <i>Prod No</i>	<b>SS body Viton diaphragm</b> <i>Prod No</i>	<b>SS body SS diaphragm</b> <i>Prod No</i>
<i>Flow rate /min</i>				
<b>With standard control knob</b>				
0 - 200 mL	FC30AV1K	FC30AS1K	FC30SV1K	FC30SS1K
0 - 300 mL	FC30AV2K	FC30AS2K	FC30SV2K	FC30SS2K
0 - 800 mL	FC30AV3K	FC30AS3K	FC30SV3K	FC30SS3K
0 - 1.6 L	FC30AV4K	FC30AS4K	FC30SV4K	FC30SS4K
<b>With Spectrol 3-digit dial</b>				
0 - 200 mL	FC30AV1S3	FC30AS1S3	FC30SV1S3	FC30SS1S3
0 - 300 mL	FC30AV2S3	FC30AS2S3	FC30SV2S3	FC30SS2S3
0 - 800 mL	FC30AV3S3	FC30AS3S3	FC30SV3S3	FC30SS3S3
0 - 1.6 L	FC30AV4S3	FC30AS4S3	FC30SV4S3	FC30SS4S3
<b>With Spectrol 4-digit dial</b>				
0 - 200 mL	FC30AV1S4	FC30AS1S4	FC30SV1S4	FC30SS1S4
0 - 300 mL	FC30AV2S4	FC30AS2S4	FC30SV2S4	FC30SS2S4
0 - 800 mL	FC30AV3S4	FC30AS3S4	FC30SV3S4	FC30SS3S4
0 - 1.6 L	FC30AV4S4	FC30AS4S4	FC30SV4S4	FC30SS4S4
<b>With screwdriver adjustable operator</b>				
0 - 750 mL	FC31AV1			

**MORE INFORMATION**

Male pipe adapters  
Internal . . . . . page 35  
External . . . . . 36

# Micrometering valves

## CONTROL DEVICES

Micrometering (needle) valves combine the ease of connection associated with Valco zero dead volume fittings with convenient bulkhead mounting. Very low internal volume and precision design make this valve ideal for use as a gas control valve in chromatographic systems.

The Viton® model is rated at 225°C, while a version with Kalrez™ seals is capable of continuous operation at 315°C. This allows a needle valve to be mounted directly within a heated oven, facilitating control of

flow switching in multidimensional systems while keeping the gases at oven temperature.


Valves are rated for maximum of 1000 psi gas. They are individually tested on a mass spectrometer leak detector to a helium leak rate specification of  $< 1 \times 10^{-8}$  atm cc/sec.

An unlubricated version with a specially polished seat was designed to be used with our pulsed discharge detectors, and should be used upstream of any ultrapure gas system. There is also a 1/16" tube version.

### 1/16" micrometering valves

*with Valco fittings*

Seal	Lubrication	Prod No
<b>Standard:</b> 2–225 ml/min@ 15 psig N <sub>2</sub> inlet		
Viton	Lubricated	ZBNV1
Viton	Non-lubricated	ZBNV1-D
Kalrez	Non-lubricated	ZBNV1-KZ
<b>Fine control:</b> 2–175 ml/min@ 15 psig N <sub>2</sub> inlet		
Viton	Lubricated	ZBNV1F
Viton	Non-lubricated	ZBNV1F-D
Kalrez	Non-lubricated	ZBNV1F-KZ
<b>Low flow:</b> 2–90 ml/min@ 40 psig N <sub>2</sub> inlet		
Viton	Lubricated	ZBNV1LF
Viton	Non-lubricated	ZBNV1LF-D
Kalrez	Non-lubricated	ZBNV1LF-KZ

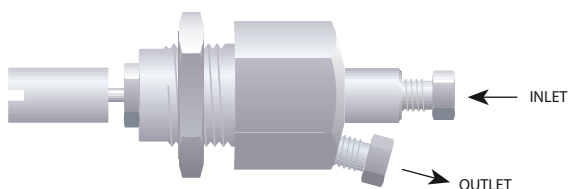

### 1/16" micrometering valves

*with 18" tubes*

Seal	Lubrication	Prod No
<b>Fine control:</b> 2–175 ml/min@ 15 psig N <sub>2</sub> inlet		
Viton	Lubricated	BNV1
Viton	Non-lubricated	BNV1-D
Kalrez	Non-lubricated	BNV1-KZ
<b>Low flow:</b> 2–90 ml/min@ 40 psig N <sub>2</sub> inlet		
Viton	Lubricated	BNV1LF
Viton	Non-lubricated	BNV1LF-D
Kalrez	Non-lubricated	BNV1LF-KZ



VICI regulators are machined from aluminum bar stock and then hard-anodized to provide contamination-free service. They feature a stainless steel diaphragm and Viton®-sealed stainless poppet. The compact size (1.125" diameter by 2" long for regulator, 3" long for combo version) saves panel space and permits installation anywhere that an 11/16" hole can be located. Mounting hardware is supplied.

While the outward appearance is unchanged, a recent redesign has enhanced thermal stability, linearity, and shock resistance.

The VICI combo regulator is a combination regulator and shut-off valve. The pressure is set using the screwdriver adjustment in the center

of the on/off knob. Turning the knob counterclockwise provides positive shutoff, while clockwise rotation restores gas pressure to within 0.05 psi of the setpoint.

Available with outlet pressure ranges of 0-15 psi, 0-30 psi, or 0-60 psi, VICI regulators can be ordered with 1/16" or 1/8" Valco internal fittings or 1/8" external fittings. Other configurations are available in OEM quantities.

Maximum operating temperature is 100°C, and maximum supply pressure is 250 psig. The influence of supply pressure on outlet pressure is less than 0.1 psi per 10 psi change in supply pressure.

**Pressure regulators**

**NEW**

*No knob and shut-off feature*



**SPECS**

**Maximum inlet pressure:**  
250 psi

**Maximum temperature:**  
100°C

- Wetted materials:**
- Anodized aluminum
  - Stainless steel
  - Viton

**Valco internal fittings 1/16"**

*Pressure range:*

0-15 psi  
0-30 psi  
0-60 psi

*Prod No*  
PR51A15Z1  
PR51A30Z1  
PR51A60Z1

**Valco internal fittings 1/8"**

*Prod No*

PR51A15Z2  
PR51A30Z2  
PR51A60Z2

**External fittings 1/8"**

*Prod No*

PR51A15E2  
PR51A30E2  
PR51A60E2

**Combo pressure regulators**



**SPECS**

**Maximum inlet pressure:**  
250 psi

**Maximum temperature:**  
100°C

- Wetted materials:**
- Anodized aluminum
  - Stainless steel
  - Viton

**Valco internal fittings 1/16"**

*Pressure range:*

0-15 psi  
0-30 psi  
0-60 psi

*Prod No*  
PR50A15Z1  
PR50A30Z1  
PR50A60Z1

**Valco internal fittings 1/8"**

*Prod No*

PR50A15Z2  
PR50A30Z2  
PR50A60Z2

**External fittings 1/8"**

*Prod No*

PR50A15E2  
PR50A30E2  
PR50A60E2

# Instrumentation

## DETECTORS, ANALYZERS, AND PURIFIERS

Most of the components we supply to the instrumentation industry are from our valve and fitting lines. The rest, from our R&D 100 Award-winning pulsed discharge detectors to our application-dedicated trace gas analyzers, are primarily for gas detection and purification.

### Pulsed discharge detectors

#### Non-radioactive, multiple mode electron capture / helium photoionization

VICI PDDs (pulsed discharge detectors) utilize a stable, low powered, pulsed DC discharge in helium as an ionization source. Eluants from the column, flowing counter to the flow of helium from the discharge zone, are ionized by photons from the helium discharge. The bias electrode(s) focus the resulting electrons toward the collector electrode, where they cause changes in the standing current which are quantified as the detector output. Performance is equal to or better than detectors with conventional radioactive sources.

In the electron capture mode, the PDD is a selective detector for monitoring high electron affinity compounds such as freons, chlorinated pesticides, and other halogen compounds. For this type of compound, the minimum detectable quantity (MDQ) is at the femtogram ( $10^{-15}$ ) or picogram ( $10^{-12}$ ) level.

In the helium photoionization mode, the PDD is a universal, non-destructive, high sensitivity detector. The response to both inorganic and organic compounds is linear over a wide range. Response to fixed gases is positive (increase in standing current), with an MDQ in the low ppb range.

The PDD in helium photoionization mode is an ideal replacement for FIDs in petrochemical or refinery environments, where the hydrogen and flame can be problematic. In addition, when the discharge gas is doped with argon, krypton, or xenon (depending on the desired cutoff point), the PDD functions as a specific photoionization detector for selective determination of aliphatics, aromatics, amines, and other species.



**R&D 100  
AWARD WINNER**

#### TRACE GAS ANALYZERS AT VICI.COM

For more information about trace gas analyzers, go to:

[www.vici.com/instr/itga.php](http://www.vici.com/instr/itga.php)



#### MORE INFORMATION

Pulsed discharge detectors

Model D-2 . . . . . page 221  
Model D2-IM . . . . . 222  
Model D-3 . . . . . 223  
Model D-4 . . . . . 223

Plug-and-play detectors  
for Agilent 6890 . . . . . 223  
for Agilent 7890 . . . . . 223  
for other GCs . . . . . 223



### Model D-2

The D-2 is a dual mode, universal detector system which can be retro-fitted to your older GC. The D-2-I is optimized for trace level work in the helium photoionization mode. The stand-alone systems include detector, controller, electrometer, HP2 helium purifier (see page 226), and power supply.




#### PDD Model D-2



Stand-alone system

Detector system includes detector cell, pulser, controller, electrometer, and helium purifier.

Description	110 VAC	230 VAC
	Prod No	Prod No
Mode-selectable universal electron capture / photoionization detector system	D-2	D-2-220
Detectors optimized for trace level work in helium photoionization mode		
Optimized for packed column use	D-2-I	D-2-I-220

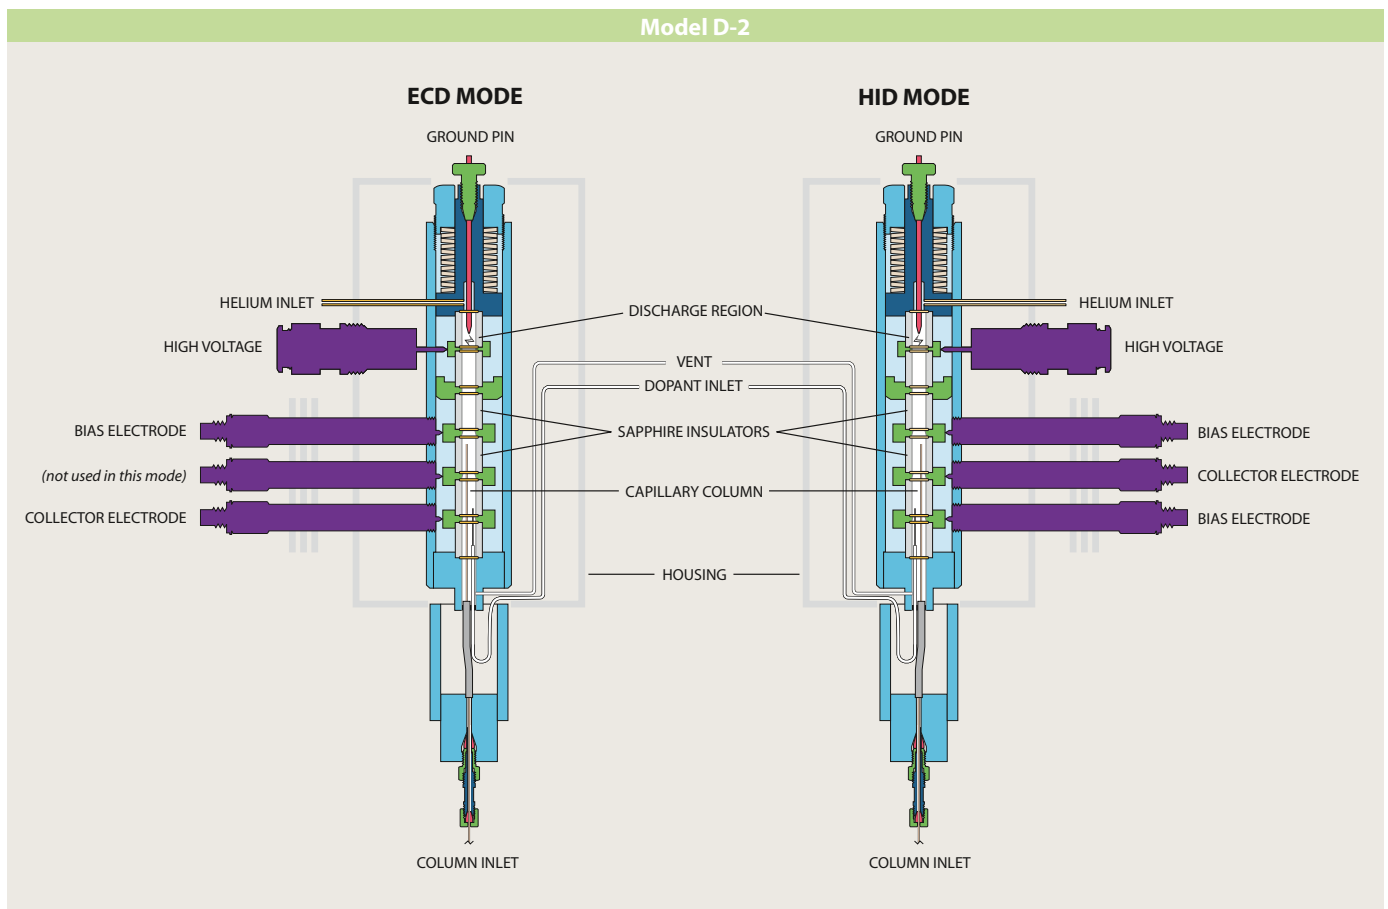

**INSTRUMENTATION**

**miniPDD helium ionization detectors**

The newest member of the PDD family is also the smallest and thriftiest. The miniPDD uses about one fifth (20%) the amount of helium as the D-3 and D-4 versions, giving up only a bit of sensitivity and dynamic range in return. It is approximately one half the size of the D-4, but has nearly the same sensitivity – about 100 ppb for fixed gases. With its reduced size, weight, and helium consumption, it is particularly well suited to portable applications, or to any situation in which the high cost of helium becomes a consideration.

It can be paired with other Valco components (controller, pulse module, helium purifiers, etc.) or can be purchased alone for use with existing components. Call today to discuss the endless possibilities.




Shown actual size.


**NEW PDD Model D2-IM** Helium photoionization

Detector cell only optimized for helium photoionization mode

Description	Prod No
miniPDD cell only	PD-D2-IM
miniPDD system Includes controller and purifier	D-2-IM

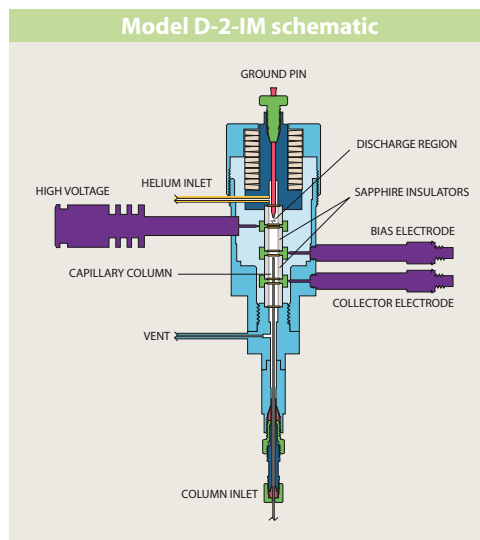

**miniPDD Model D-2-IM**

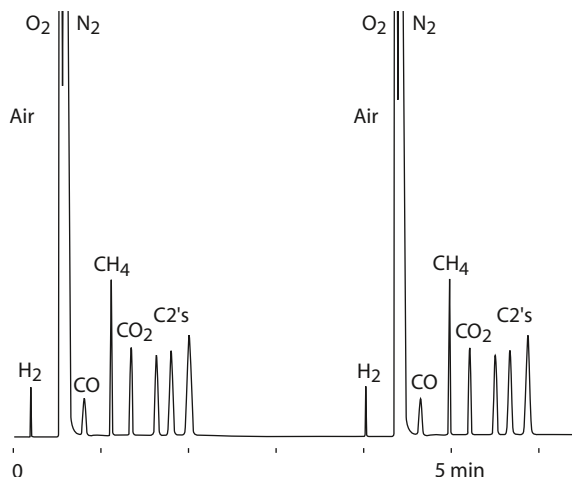


**TWO CONSECUTIVE RUNS OF LIGHT HYDROCARBONS IN AIR**

Detector: miniPDD Model PD-2-IM  
 Detector temp: 150°C  
 Column: 100/120 ShinCarbon  
 1.4 m x 0.53 mm Silcosteel  
 Resistive heat: 30°C (0.9 min) to 230°C  
 at 100°C/min (hold 1 min)  
 Sample: 2000 ppm in air, 2 µL size  
 Carrier: Helium  
 Discharge gas: Helium



Model D-3 schematic

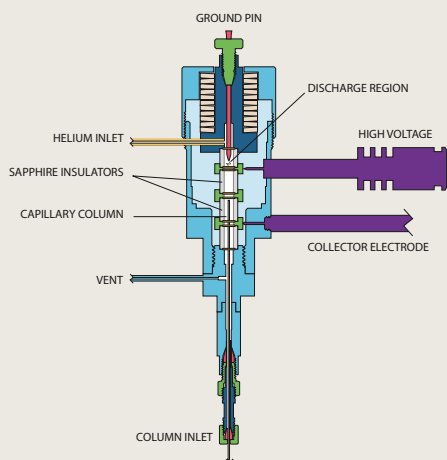

Plug-and-play detectors for Agilent 7890 and 6890

Model D-3 is designed for plug-and-play installation on the popular Agilent 6890 and 7890, and is optimized for trace level work in the helium photoionization mode.

Both versions utilize the electronics and power supply of the host GC.

PDD Model D-3

Helium photoionization


Detector optimized for trace level work in helium photoionization mode

Description	110 VAC	230 VAC
	Prod No	Prod No
Plug-in system for Agilent 7890	D-3-I-7890	D-3-I-7890-220
Plug-in system for Agilent 6890	D-3-I-HP	D-3-I-HP-220



D-3-I-HP plug-in system for Agilent 6890 GC

Model D-4 schematic

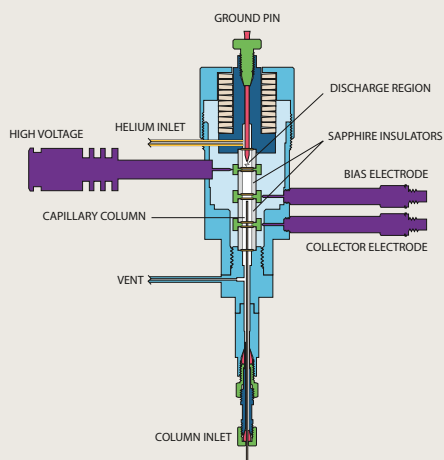

Plug-and-play detectors for other GCs


Pulsed Discharge Detector Model D-4 is available in versions for easy installation on most of the GCs in current use, including the Varian 3800; Shimadzu 14, 17, 2010, and

2014; ThermoFinnigan Trace, Mega, and Top; and Hewlett Packard 5890. The D-4 is single mode, optimized for trace level work in the helium photoionization mode.

PDD Model D-4

Helium photoionization

Detectors optimized for trace level work in helium photoionization mode

Description	110 VAC	230 VAC
	Prod No	Prod No
Specialized detector for		
HP 5890	D-4-I-HP58	D-4-I-HP58-220
Shimadzu GC 14 *	D-4-I-SH14-R	D-4-I-SH14-R-220
Shimadzu GC 17, 2010, 2014 *	D-4-I-SH17-R	D-4-I-SH17-R-220
Thermo Trace GC *	D-4-I-TQ-R	D-4-I-TQ-R-220
Varian 3800 *	D-4-I-VA38-R	D-4-I-VA38-R-220
* Uses existing GC FID electrometer.		
For all other GCs	D-4-I	D-4-I-220 

NOTE

PDD Model D-4-I-220 has been designed to meet CE regulations.


INSTRUMENTATION

Model D-2

**HERBICIDES IN SOIL SAMPLES  
USING EPA METHOD 8151**

Detector: PDD Model D-2  
 Mode: Electron capture  
 Sample: Environmental soil (1 g)  
 Detector temp: 320°C  
 Column: ValcoBond VB-5  
 30 m x 0.25 mm x 0.25 µm  
 Column temp: 60°C (2 min),  
 20°C/min to 180°C,  
 4°C/min to 220°C,  
 40°C/min to 300°C (5 min)  
 Injector temp: 200°C  
 Sample volume: 2 µL (solvent microex-  
 traction), 1:15 split  
 Discharge gas: Helium  
 Dopant gas: Helium/argon  
 Attenuation: 1

- 1 Dicamba
- 2 2,4,5-TP
- 3 2,4,5-T
- 4 Dinoseb

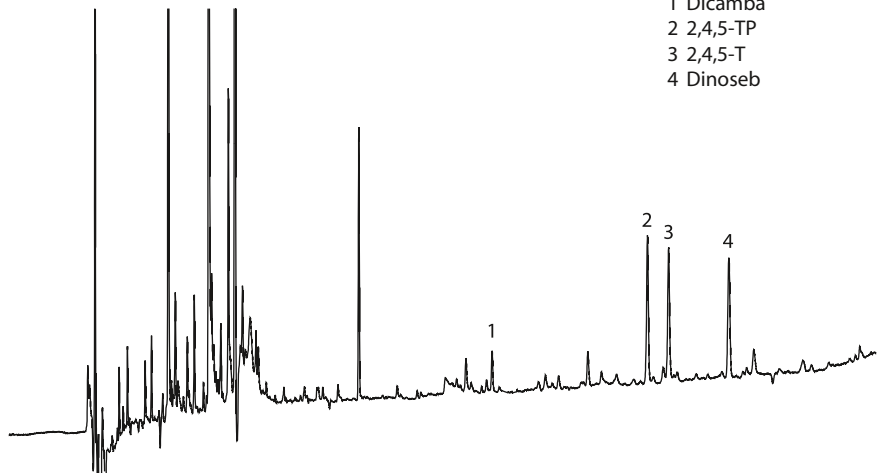


PDD Model D-2

**PAH RESIDUES IN AN  
ENVIRONMENTAL SOIL SAMPLE SPIKE**

Detector: PDD Model D-2  
 Mode: Helium photoionization  
 Sample: Environmental soil (1 g)  
 Detector temp: 300°C  
 Column: ValcoBond VB-35  
 30 m x 0.25 mm x 0.25 µm  
 Column temp: 120°C for 3 min, 15°C/min  
 to 310°C for 15 min  
 Injector temp: 275°C  
 Sample volume: 2 µL (solvent microex-  
 traction), 1:15 split  
 Discharge gas: Helium  
 Dopant gas: none  
 Attenuation: 1


- 1 Naphthalene
- 2 Acenaphthalene
- 3 Acenaphthene
- 4 Fluorene
- 5 Phenanthrene
- 6 Anthracene
- 7 Fluoranthene
- 8 Pyrene
- 9 1,2 Benzantracene
- 10 Chrysene
- 11 Benzo(b)fluoranthene
- 12 Benzo(k)fluoranthene
- 13 Benzo(a)pyrene
- 14 Indeno (1,2,3-C,d)pyrene
- 15 1,2:5,6-Dibenzanthracene
- 16 1,12-Benzoperylene

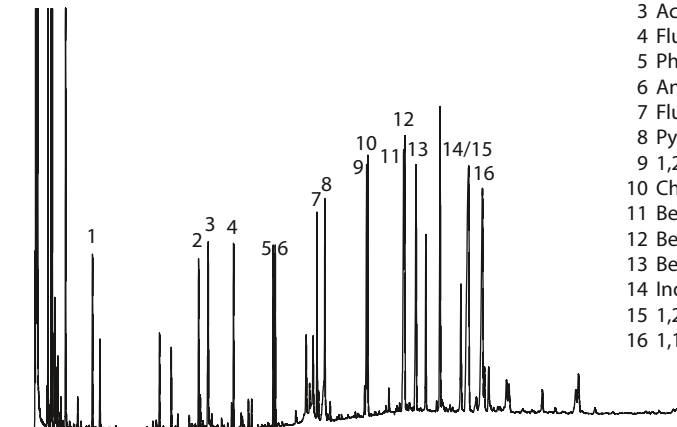

miniPDD Model D-2-IM


**SIMULATED DISTILLATION  
IN TWO MINUTES**

Detector: miniPDD  
 Detector temp: 320°C  
 Column: ValcoBond® VB-1  
 5 m x 0.25 mm x 0.20 µm  
 Column temp: 40°C initial for 0.1 min  
 to 320°C at 150°C/min  
 Injector temp: Cold on-column injection  
 Carrier gas: Helium  
 Reference gas: Helium  
 Sample: Reference Gas Oil (RGO)  
 provided by  
 Separation Systems, Inc.

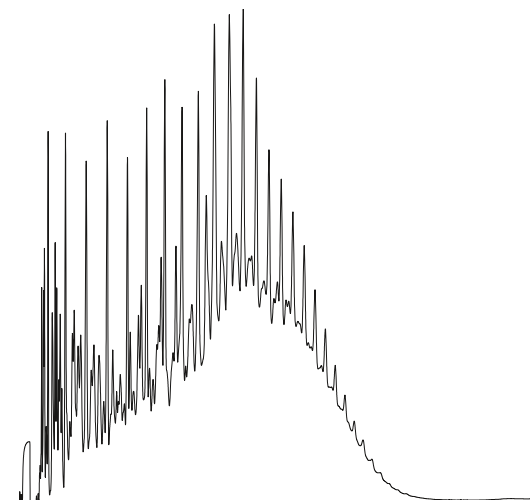

PDD Model D-3

- 1 1,3-Dichlorobenzene
- 2 1,4-Dichlorobenzene
- 3 1,2-Dichlorobenzene
- 4 Hexachlorethane
- 5 1,2,4-trichlorobenzene
- 6 Hexachlorobutadiene
- 7 Hexachlorocyclopentadiene
- 8 2-Chloronaphthalene
- 9 Hexachlorobenzene

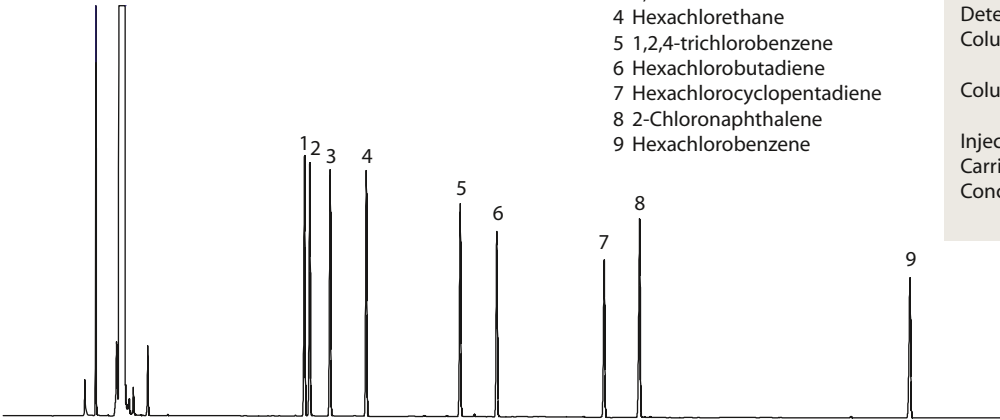


**CHLORINATED HYDROCARBONS**

Detector: PDD Model D-3  
Helium photoionization  
Detector temp: 280°C  
Column: ValcoBond VB-5  
30 m x 0.25 mm x .25 µm  
Column temp: 60°C initial to  
320°C at 10°C/min  
Injector temp: 280°C  
Carrier gas: Helium  
Concentration: 5 mg/ml

PDD Model D-3

**NITROGEN- AND PHOSPHOROUS-CONTAINING PESTICIDES**


Detector: PDD Model D-3  
Helium photoionization  
Detector temp: 280°C  
Column: ValcoBond VB-5  
30 m x 0.25 mm x .25 µm  
Column temp: 60°C initial to  
320°C at 10°C/min  
Head pressure: 15 psi  
Injector temp: 280°C  
Injector: Split 1:10  
Carrier gas: Helium  
Concentration: 2.5 mg/ml

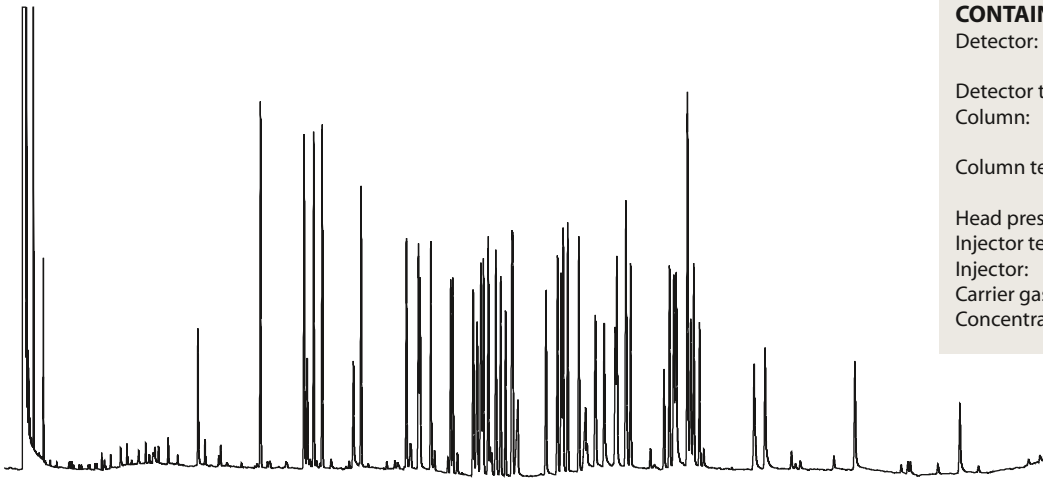

PDD Model D-3

**AIR**

Detector: PDD Model D-3  
Helium photoionization  
Detector temp: 300°C  
Column: ValcoPLOT VP-Molesieve  
30 m x 0.53 mm x 0.50 µm  
Column temp: Ambient  
Injector temp: 250°C  
Discharge gas: Helium  
Carrier gas: Helium

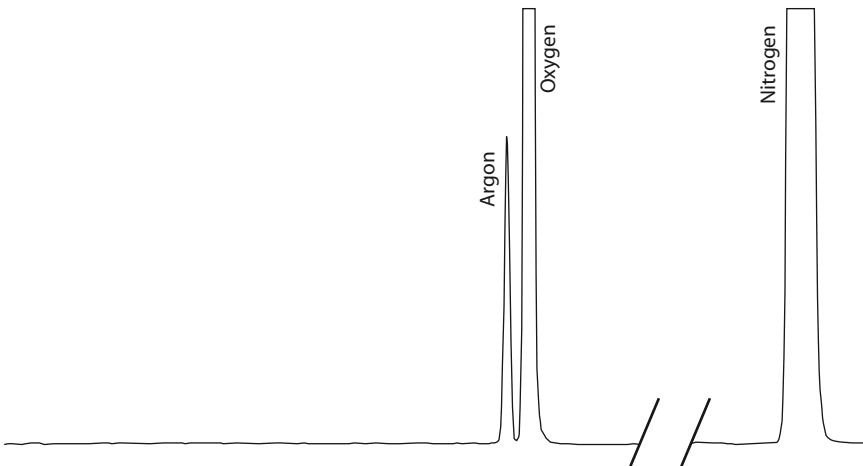

## Helium and nitrogen purifiers

Carrier gas purity is essential in any application requiring extreme sensitivity. Impurities limit detector sensitivity and can even destroy capillary columns. The Valco HP2 provides “point-of-use” purification of helium or other noble gases, such as Ar, Ne, Kr, and Xe, to sub-ppm levels of reactive gaseous impurities. The NP2 is similar, purifying nitrogen to sub-ppm levels of gaseous impurities.

The purification substrate in Valco gas purifiers is a non-evaporable gettering alloy. This stable alloy is contained in a welded assembly, so the purifiers can be used safely in industrial applications with minimal precautions. The getter is activated by heating, which eliminates the oxide film on the particle surface and allows helium to diffuse into the bulk of the getter particles. The HP2 and NP2 feature a self-regulating design which eliminates the possibility of thermal runaway and maintains the getter material at the optimum temperature.



### Standard helium and nitrogen purifiers



Includes universal power supply.

Description	Helium purifier	Nitrogen purifier
	Prod No	Prod No
110 VAC	HP2-110	NP2-110
230 VAC	HP2-220	NP2-220

#### Replacement getter assembly

Helium	I-23572HP2
Nitrogen	I-23572NP2

#### HELIUM PURIFIER

- CE certified
- Gases purified He, Ne, Ar, Kr, Xe, Rn
- Maximum operating pressure 1000 psig
- Impurities removed Outlet impurities less than 10ppb H<sub>2</sub>O, H<sub>2</sub>, O<sub>2</sub>, N<sub>2</sub>, NO, NH<sub>3</sub>, CO, CO<sub>2</sub>, and CH<sub>4</sub>, based on 10ppm total inlet impurities. Other impurities removed include CF<sub>4</sub>, CCl<sub>4</sub>, SiH<sub>4</sub> and light hydrocarbons.
- Impurities **not** removed He, Ne, Ar, Kr, Xe, Rn

#### NITROGEN PURIFIER

- CE certified
- Gases purified N<sub>2</sub> only
- Impurities removed Outlet impurities less than 10ppb H<sub>2</sub>O, H<sub>2</sub>, O<sub>2</sub>, NO, NH<sub>3</sub>, CO, CO<sub>2</sub>, and CH<sub>4</sub>, based on 10ppm total inlet impurities. Other impurities removed include CF<sub>4</sub>, CCl<sub>4</sub>, SiH<sub>4</sub> and light hydrocarbons.
- Impurities **not** removed He, Ne, Ar, Kr, Xe, Rn, N<sub>2</sub>



## Miniature gas purifiers

The Valco Miniature Helium Purifier (HPM) and Miniature Nitrogen Purifier (NPM) are designed to be installed in a gas chromatograph's flow path immediately upstream of the injector. The HPM/NPM will

remove any contaminants introduced by flow controllers, elastomeric tube seals, pressure regulators, crude traps, or other system components that are not completely clean and leak-tight.

### Mini helium and nitrogen purifiers

CE

Includes universal power supply.

<i>Description</i>	<b>Helium purifier</b> <i>Prod No</i>	<b>Nitrogen purifier</b> <i>Prod No</i>
110 VAC	HPM-110	NPM-110
230 VAC	HPM-220	NPM-220



## Microvolume thermal conductivity detector

Our dual filament TCD is a stand-alone unit consisting of the detector housing and a controller with electrometer and temperature controls. The detector cell includes two separate nickel/iron filaments, capable of independent or referenced (differential) operation. Cell volume and geometry are optimized for capillary chromatography and

enhanced sensitivity at low flow rates. (Recommended total flow rate: 2-10 mL/min.) Thermal stability is maintained to  $\pm 0.02^{\circ}\text{C}$ , resulting in a stable, noise-free signal. A single 0-1 millivolt attenuated output for a strip chart recorder is provided through the signal cable at the rear of the controller, with 0-1 volt and 0-10 volt unattenuated signals available through the remote signal cable.

### TCD Thermal conductivity detectors

CE

<i>Description</i>	<b>110 VAC</b> <i>Prod No</i>	<b>230 VAC</b> <i>Prod No</i>
Entire unit (cell and electronics)	TCD2-NIFE-110	TCD2-NIFE-220
Cell/oven assembly only, dual filament	TCD2-NIFED-110	TCD2-NIFED-220
TCD controller only	TCD2-C-110	TCD2-C-220

# Calibration gas standards

PERMEATION DEVICES AND CALIBRATION GAS GENERATORS

from VICI Metronics

VICI Metronics, Inc. in Poulsbo, Washington is the leading manufacturer of devices and instruments that are used in the generation of calibration gas standards, including Dynacal® and G-Cal permeation tubes and Dynacalibrator® and G-Cal calibration gas generators. In addition, Metronics is the leading provider of explosives, narcotics, and chemical warfare dopants for TSA airport security (ammonia, DCM, and BHT), law enforcement, border patrol, military, and other trace detection industry professionals. The product line also includes gas purifiers, contaminant traps, and GC Industries oxygen and toxic gas monitors.

## Calibration gas standards

The purpose of a calibration gas standard is to establish a reference point for the verification of an analysis. Permeation tube rates can be certified using standards traceable to NIST by the most basic and accurate laboratory procedure – measuring the gravimetric weight loss over a known period of time at a known temperature. Permeation rate data is already established for hundreds of different compounds, and rates for new compounds can be easily certified using NIST-traceable standards.

### Advantages

Calibration devices from VICI Metronics offer several advantages over cylinder-supplied gas calibration standards. Multi-component gas mixtures can be easily generated with NIST traceability employing

established EPA and ASTM protocols by using the appropriate combination of permeation devices. This technique also allows the removal of a single component from a gas mixture by simply removing the appropriate permeation device. A wide range of concentrations can easily be generated by simply varying the dilution flow rate.

By contrast, bottled trace level (ppb and ppm) standards can be very expensive, and calibrations requiring multiple components over a wide range of concentrations require a large number of gas cylinders, consuming valuable lab space. Problems can also arise from degradation of the standard within the cylinder, from changes in cylinder pressure, and from interaction of calibration components and surfaces.


### TO ORDER

For prices or more information about specific compounds available in permeation devices, contact VICI Metronics:

Toll-free 877-737-1887  
Tel . . . . .360-697-9199  
Fax . . . . .360-697-6682

[vicimetronics.com](http://vicimetronics.com)



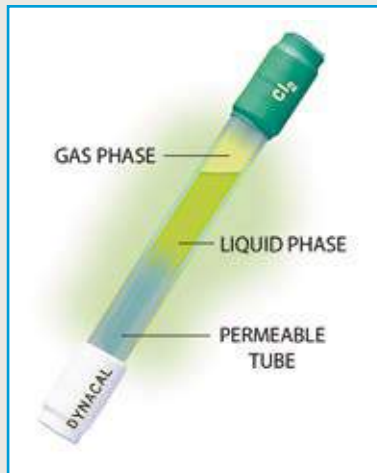

- Ideal for lab environments
- Smaller than G-Cal devices
- More accurate than G-Cal devices
- Require a temperature-controlled environment
- Inexpensive calibration solution

Dynacal permeation devices are small, inert capsules containing a pure chemical compound in a two phase equilibrium between its gas phase and its liquid or solid phase. At a constant temperature, the device emits the compound through its permeable portion at a constant rate. Devices are typically inserted

into a carrier flow to generate test atmospheres for calibrating gas analyzer systems, testing hazardous gas alarms, or conducting long-term studies of effects on materials or biological systems – in short, any situation requiring a stable concentration of a specific trace chemical.

**COMPOUNDS AVAILABLE IN DYNACAL PERM DEVICES**

Literally hundreds of compounds are available in our permeation devices. This list is merely representative of the range we offer. Contact us if you don't see what you're looking for.

- Ammonia
- Benzene
- Carbon disulfides
- Carbon tetrachloride
- Chlorine
- Dichloromethane
- Dimethyl sulfide
- Ethanol
- Ethylene oxide
- Freon
- Formaldehyde
- Hydrogen cyanide
- Hydrogen fluoride
- Hydrogen sulfide
- Iodine
- Isopropyl alcohol
- Mercury
- Methanol
- Methyl bromide
- MTBE
- Nitrogen dioxide
- Octane
- Sulfur dioxide
- Sulfur hexafluoride
- Thiophene
- Toluene
- Vinyl acetate
- Water
- Xylenes

**Tubular device**

The tubular device, or "perm tube", is a sealed permeable cylinder containing the desired permeant reference material.



Release of the chemical occurs by permeation through the walls of the PTFE tube for the entire length between the impermeable plugs. A wide range of rates – typically from 5 ng/min to 50,000 ng/min – can be achieved by varying the length and thickness of the tube. These are the most widely used of the various permeation devices.

**Extended life tubular device**

Our unique extended life tubular (XLT) device is essentially a standard perm tube coupled to an impermeable stainless steel reservoir. This design offers a range of permeation rates corresponding to a tubular device, but has a significantly enhanced lifetime – by a factor of 3 for a 5 cm (active length) device or a factor of 12 for a 1 cm device.



**Wafer device**

Wafer devices have only a small permeable window, or wafer, so permeation rates are typically lower than



rates for tubular devices. Since permeation occurs only through the polymeric wafer, the permeation rate is controlled by varying the wafer material, the thickness of the wafer, and the diameter of the permeation opening. Gases whose high vapor pressure at normal permeation temperatures prevent their containment in a tubular device can be contained in a wafer device. Wafer devices are available in different styles to allow use in calibrators made by various manufacturers.

**MORE INFORMATION**

G-Cal perm tubes. . .p.232

## CALIBRATION GAS STANDARDS

- Deliver precise concentrations from ppb to high ppm
- Use Dynacal® permeation devices as the trace gas source, with front panel access to the permeation chamber
- Proprietary constant temperature system controls chamber temperature at a set point with  $\pm 0.01^\circ\text{C}$  accuracy
- Choice of plumbing and flow configurations

VICI Metronics Dynacalibrators allow you to verify the accuracy of analytical data from air pollution monitoring, industrial hygiene surveys, odor surveys, and other instruments measuring gas concentration. All models enable calibrations traceable to NIST standards for almost any gas analyzer, in the lab or in the field.

The design takes full advantage of all the conveniences inherent in our Dynacal® permeation devices to generate and deliver precise concentrations ranging from ppb to high ppm for hundreds of different compounds. Standard features on all our models, from the most basic Model 150 to the most fully-equipped Model 500, facilitate accurate, reproducible, trouble-free calibrations time after time.

### Model 120 (Non-CE) Portable Dynacalibrators®

- Completely portable
- Pump powered by rechargeable battery or a 12 VDC source (inverter with cigarette lighter plug provided)
- Available temperature control from  $5^\circ\text{C}$  above ambient to  $100^\circ\text{C}$
- Utilizes permeation devices – no bulky cylinders

Standard features on Model 120 include a glass or PTFE permeation chamber with screw cap access, solid state proportional temperature controller with digital readout of set point and chamber temperature, heater switch with LED indicator, flowmeter and flow control valve, span and overflow outlets, 12 VDC internal pump, activated charcoal scrubber, and molded fiberglass case.

Non-CE, use restricted within the EU.



Model 120

### Model 150 Dynacalibrators®

- Temperature control with an accuracy of  $\pm 0.01^\circ\text{C}$  from  $5^\circ\text{C}$  above ambient to  $110^\circ\text{C}$
- Ultra compact
- PPB to high PPM range

At only 6" wide x 15" deep x 7" high and 10.5 pounds, the Dynacalibrator Model 150 is a compact calibrator capable of delivering the precise concentrations you require. A passivated glass-coated stainless steel permeation chamber houses the permeation device(s). (Carrier and dilution flow rates must be supplied and measured externally.) The digital temperature controller maintains the chamber temperature at a set point with an accuracy of  $\pm 0.01^\circ\text{C}$ , traceable to NIST standards. The wide range of temperature



Model 150

settings ( $5^\circ\text{C}$  above ambient to  $110^\circ\text{C}$ ) means the end user can generate a wide range of volumetric concentrations for both low and high vapor pressure chemical compounds, establishing or changing the desired volumetric concentration by simply varying the carrier flow.



**CALIBRATION GAS STANDARDS**

**Model 230  
Dynacalibrators®**

With a flexible flow metering system to maintain a constant carrier flow through the permeation chamber, the Model 230 allows the dilution flow to be varied over a wide range, generating the spectrum of concentrations required for checking analyzer linearity. Like all Dynacalibrators, its permeation chamber is big enough to accommodate several permeation devices for higher output concentrations or multi-component mixtures.



**Model 340  
Dynacalibrators®**

The Model 340 adds a front panel mode control switch to select between zero or span calibration modes. In the zero mode, scrubbed air is delivered to the span outlet, allowing the end user to establish zero before sampling.



**Model 450  
Dynacalibrators®**

Ordinarily, the plumbing connections between the sample manifold, analyzer, and calibrator must be changed for each calibration. The Model 450's unique "through-port" feature eliminates this chore. The mode control switch selects among standby, zero, span 1 (low concentration), and span 2 (high concentration) modes.



**Model 500  
Dynacalibrators®**

This innovative design features two separate permeation chambers with independent temperature control systems. The chambers can be used independently, or together to combine concentrations of trace components. Separate solenoid valves allow the carrier flows to be switched from the dilution stream to a vent port.



**TO ORDER**

For prices or more information about specific compounds available in permeation devices, contact VICI Metronics:

Toll-free 877-737-1887  
Tel .....360-697-9199  
Fax.....360-697-6682

**vicimetronics.com**

## G-Cal permeation devices

### CALIBRATION GAS STANDARDS


- Excellent for use in the field
- Can be operated at room temperature
- Can handle Arsine and Phosphine
- Longer lifetime than Dynacal® devices

G-Cal permeation tubes offer a proven and repeatable means of generating desired gas or vapor concentrations. The permeant gas escapes through the proprietary membrane system and mixes with a carrier gas (nitrogen is the most common) at a controlled flow rate to obtain a known mixture in ppm or ppb. Applications include calibration of gas monitoring systems and chromatographs, accuracy check of gas detectors, and generation of known test atmospheres for a specific application.

G-Cal devices exhibit the lowest temperature sensitivity among available similar products. The permeation rate through the polymeric membrane used in G-Cal devices changes only 1-3% per degree C, eliminating the need for a temperature-controlled chamber. Most G-Cal devices are guaranteed for 12 months operating life.



Over 100 different substances are available, including Arsine, Phosphine, and gas phase devices such as CO, NO, and Methane. Available permeation rates range from less than 100 ng/min to 50,000 ng/min. Each G-Cal device is individually calibrated and verified to generate a given mass output per unit time (ng/min) at a set point temperature. A graph which shows an estimated permeation rate vs. temperature from 0 to 50°C is included with each device.

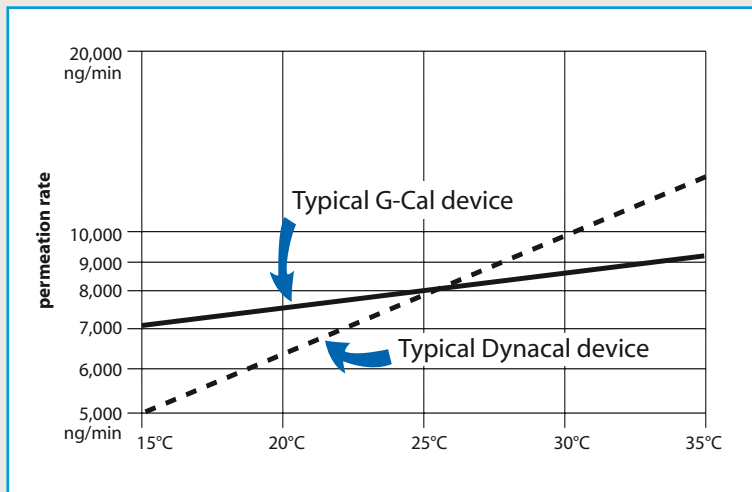

Comparison of G-Cal permeation devices and Dynacal PTFE permeation devices

### COMPOUNDS AVAILABLE IN G-CAL PERM TUBES

Literally hundreds of compounds are available in our permeation devices. This list is merely representative of the range we offer. Contact us if you don't see what you're looking for.

Ammonia  
 Arsine \*  
 Benzene  
 Carbon Dioxide \*  
 Carbon Monoxide \*  
 Carbonyl Sulfide  
 Chloroform  
 DMMP  
 Dichloromethane  
 Dimethyl Sulfide  
 Dimethyl Formamide  
 Ethyl Chloride  
 Ethyl Mercaptan  
 Ethylene Oxide  
 Freons  
 Hydrogen Fluoride  
 Hydrogen Sulfide  
 Methane \*  
 Methanol  
 Methyl Mercaptan  
 Nitric Oxide \*  
 Nitrogen Dioxide  
 Nitrous Oxide \*  
 Phosphine \*  
 Propylene Oxide  
 Sulfur Dioxide  
 Sulfur Hexafluoride  
 Thiophene  
 Toluene  
 Vinyl Chloride  
 Water  
 Xylenes

\* Available only in G-Cal permeation devices.

### MORE INFORMATION

Dynacal perm tubes . . . . .p.229



- Portable and rugged – ideal for field use
- Ambient temperature from 15°C to 45°C
- Built-in pump
- Carrier gas flow rates from 100-1000 or 200-4000 cc/min
- Models with oven for constant temperature control at cold field sites

G-Calibrators are rugged portable units specifically designed to be used with our patented Series 23 G-Cal permeation devices to generate known concentrations (ppb to ppm) of various gases and liquid vapors. This combination offers the easiest method of calibrating toxic gas detection equipment, gas analyzers, and chromatographs commonly used in chemical, petrochemical, paper, power, and related industries.

Due to its unique permeation technology, the permeation rate of a G-Cal device remains fairly stable when exposed to changing temperatures. For most applications, this feature eliminates the need for the temperature-controlled oven.

Models with an oven have a single fixed temperature point (35° - 50°C). Models powered by a 12 VDC NiCad rechargeable battery also include a 110 VAC external charger. All G-Calibrators have stainless steel fittings and FEP tubing throughout.

### G-Calibrators

*Non CE. Use restricted in EU*

Non-CE, use restricted within the EU.

Flow range	Oven	Battery	Prod No.
100-1000 cc/min	no	1.5 VDC	2301
	no	12 VDC NiCad	2310-10
	yes	12 VDC NiCad	2330-10
200-4000 cc/min	no	12 VDC NiCad	2310-20
	yes	12 VDC NiCad	2330-20

#### TO ORDER

For prices or more information about specific compounds available in permeation devices, contact VICI Metronics:

Toll-free 877-737-1887

Tel .....360-697-9199

Fax.....360-697-6682

**vicimetronics.com**

# GC capillary columns

VALCOBOND® AND VALCO PLOT®

from VICI Metronics

ValcoBond® and ValcoPLOT® capillary columns meet the highest quality standards for resolution, retention characteristics, inertness, bleed, and reproducibility.

## ValcoBond® capillary columns

- Individually tested
- High temperature range
- Competitive pricing

We use proprietary liquid phase processing to produce low bleed characteristics while maintaining retention characteristics identical to the phases you are used to.

## ValcoPLOT® capillary columns

- Widest polarity range
- Faster than micropacked
- Water tolerant

Reduce run time by replacing your packed columns with ValcoPLOT HayeSep capillary PLOT columns, with phases available only from VICI. Our proprietary phase processing produces the first capillary PLOT columns with characteristics identical to HayeSep packed columns.

### VALCOBOND PHASES

pages 236-238

<b>VB-FLUORO</b>	Bonded fluorosilicone phase
<b>VB-1</b>	100% dimethylpolysiloxane
<b>VB-5</b>	(5%-Phenyl)-methylpolysiloxane
<b>VB-35</b>	(35%-Phenyl)-methylpolysiloxane
<b>VB-50/608</b>	(50%-Phenyl)-methylpolysiloxane
<b>VB-624</b>	(6% Cyanopropyl-phenyl)-methylpolysiloxane
<b>VB-1701</b>	(14% Cyanopropyl-phenyl)-methylpolysiloxane
<b>VB-Wax</b>	Polyethylene glycol (PEG)



### VALCO PLOT PHASES

pages 240-244

<b>ValcoPLOT Molesieve 5Å</b>	<b>ValcoPLOT A</b>	High purity Divinylbenzene/ethyleneglycoldimethacrylate
<b>ValcoPLOT Metal Molesieve 5Å</b>	<b>ValcoPLOT B</b>	Divinylbenzene/polyethyleneimine
<b>ValcoPLOT Alumina KCl</b>	<b>ValcoPLOT C</b>	Divinylbenzene/acrylonitrile
<b>ValcoPLOT Alumina Na<sub>2</sub>So<sub>4</sub></b>	<b>ValcoPLOT D</b>	High purity Divinylbenzene
	<b>ValcoPLOT N</b>	Divinylbenzene/ethyleneglycoldimethacrylate
	<b>ValcoPLOT P</b>	Divinylbenzene/styrene
	<b>ValcoPLOT Q</b>	Divinylbenzene
	<b>ValcoPLOT R</b>	Divinylbenzene/N-vinyl-2-pyrrolidinone
	<b>ValcoPLOT S</b>	Divinylbenzene/4-vinyl-pyridine

### PRODUCTS FOR GC

Other useful products for gas chromatography include:

1/32" ultra low mass external unions . . .	p 19
FS adapter ferrules . . .	16-17
GC Detectors . . .	221-223, 227
Injection valves . . . . .	104-113
Stream selectors . . . . .	124-135
Gas purifiers . . . . .	246-247
Helium and nitrogen purifiers . . . . .	226-227
Inlet discs (injector nuts for HP 6890 and 5890 . . .	18
Reduced breakdown injection port liners . . . . .	245

### TO ORDER

For prices or more information about your specific application, contact VICI Metronics:

Toll-free 877-737-1887  
Tel . . . . . 360-697-9199  
Fax . . . . . 360-697-6682

[columns@vici.com](mailto:columns@vici.com)



**PRIMARY APPLICATIONS**

Aldehydes  
CFCs  
Explosives  
Ketones  
PAHs  
Silanes  
Unsaturated compounds

**VB-Fluoro Capillary Columns**

- 100% bonded Fluorosilicone
- High thermal stability
- Unique selectivity

VB-Fluoro capillary columns feature unique selectivity created by high fluorine affinity to analyte lone pair electrons. This is coupled with thermal stability similar to low polarity phases such VB-1 and VB-5.


Low bleed characteristics make VB-Fluoro columns well suited for MS and ECD applications, and the high thermal stability allows their use as a complementary column for most high temperature applications which commonly utilize low polarity stationary phases.

Primary applications include ketones, aldehydes, explosives, PAHs, silanes, CFCs, and unsaturated compounds.


VB-Fluoro columns are a good replacement for Rtx-200, DB-200, DB-210, and VF-200 columns.

**VB-Fluoro**

0.25 mm ID	df	Prod No
30 meters	0.25	CFS-N03025-025
0.53 mm ID		
30 meters	1.00	CFS-N03053-100

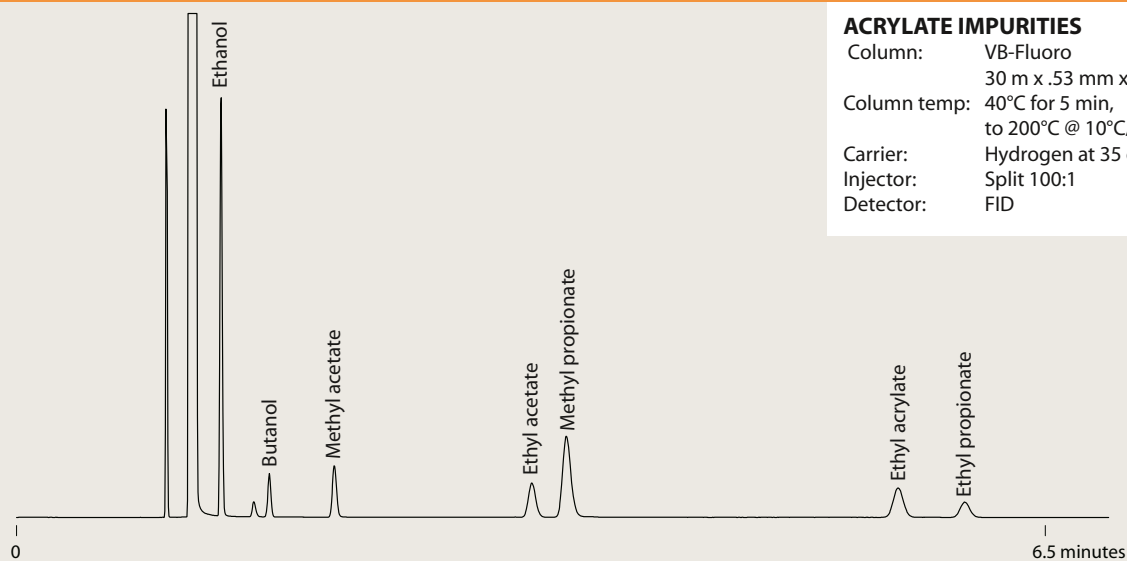**VB-Fluoro****ACRYLATE IMPURITIES**

Column: VB-Fluoro  
30 m x .53 mm x 1.00  $\mu$ m  
Column temp: 40°C for 5 min,  
to 200°C @ 10°C/min  
Carrier: Hydrogen at 35 cm/sec  
Injector: Split 100:1  
Detector: FID

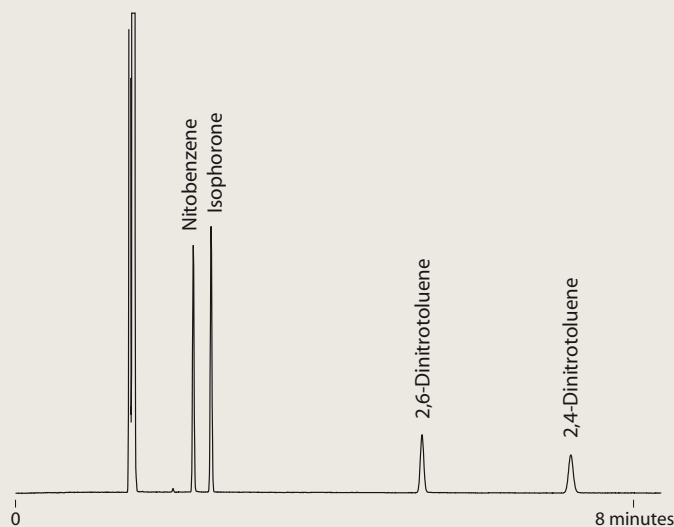**VB-Fluoro****EXPLOSIVES**

Column: VB-Fluoro  
30 m x .53 mm x 1.00  $\mu$ m  
Column temp: Isothermal 200°C  
Carrier: Hydrogen at 35 cm/sec  
Injector: Split 100:1  
Detector: FID

GC CAPILLARY COLUMNS

**VB-1**

100% dimethylpolysiloxane

**REPLACES**

DB-1, DB-1ms, HP-1, HP-1MS, Ultra-1, Rtx-1, Rtx-1MS, SPB-1, MDN-1, BP-1, CP-Sil 5 CB, GB-1, 007-1, OV-1, SE-30, AT-1 and ZB-1

0.10 mm ID	df	Prod No
10 meters	0.10	CFS-A01010-010B
10 meters	0.20	CFS-A01010-020B
10 meters	0.40	CFS-A01010-040B
20 meters	0.10	CFS-A02010-010B
20 meters	0.20	CFS-A02010-020B
20 meters	0.40	CFS-A02010-040B
0.18 mm ID	df	Prod No
10 meters	0.10	CFS-A01018-010B
10 meters	0.18	CFS-A01018-018B
10 meters	0.40	CFS-A01018-040B
30 meters	0.10	CFS-A03018-010B
30 meters	0.18	CFS-A03018-018B
30 meters	0.40	CFS-A03018-040B
30 meters	1.00	CFS-A03018-100B
40 meters	0.18	CFS-A04018-018B
40 meters	0.40	CFS-A04018-040B
0.25 mm ID	df	Prod No
15 meters	0.10	CFS-A01525-010B
15 meters	0.25	CFS-A01525-025B
15 meters	0.50	CFS-A01525-050B
15 meters	1.00	CFS-A01525-100B
15 meters	1.50	CFS-A01525-150B
30 meters	0.10	CFS-A03025-010B
30 meters	0.25	CFS-A03025-025B
30 meters	0.50	CFS-A03025-050B
30 meters	1.00	CFS-A03025-100B
30 meters	1.50	CFS-A03025-150B
60 meters	0.10	CFS-A06025-010B
60 meters	0.25	CFS-A06025-025B
60 meters	0.50	CFS-A06025-050B
60 meters	1.00	CFS-A06025-100B
60 meters	1.50	CFS-A06025-150B
0.32 mm ID	df	Prod No
15 meters	0.10	CFS-A01532-010B
15 meters	0.25	CFS-A01532-025B
15 meters	0.32	CFS-A01532-032B
15 meters	0.50	CFS-A01532-050B
15 meters	1.00	CFS-A01532-100B

0.32 mm ID, cont'd	Prod No	
15 meters	2.00	CFS-A01532-200B
15 meters	3.00	CFS-A01532-300B
15 meters	4.00	CFS-A01532-400B
15 meters	5.00	CFS-A01532-500B
30 meters	0.10	CFS-A03032-010B
30 meters	0.25	CFS-A03032-025B
30 meters	0.32	CFS-A03032-032B
30 meters	0.50	CFS-A03032-050B
30 meters	1.00	CFS-A03032-100B
30 meters	2.00	CFS-A03032-200B
30 meters	3.00	CFS-A03032-300B
30 meters	4.00	CFS-A03032-400B
30 meters	5.00	CFS-A03032-500B
60 meters	0.10	CFS-A06032-010B
60 meters	0.25	CFS-A06032-025B
60 meters	0.32	CFS-A06032-032B
60 meters	0.50	CFS-A06032-050B
60 meters	1.00	CFS-A06032-100B
60 meters	2.00	CFS-A06032-200B
60 meters	3.00	CFS-A06032-300B
60 meters	4.00	CFS-A06032-400B
60 meters	5.00	CFS-A06032-500B
0.53 mm ID	df	Prod No
15 meters	0.15	CFS-A01553-015B
15 meters	0.50	CFS-A01553-050B
15 meters	1.00	CFS-A01553-100B
15 meters	1.50	CFS-A01553-150B
15 meters	3.00	CFS-A01553-300B
15 meters	5.00	CFS-A01553-500B
30 meters	0.15	CFS-A03053-015B
30 meters	0.50	CFS-A03053-050B
30 meters	1.00	CFS-A03053-100B
30 meters	1.50	CFS-A03053-150B
30 meters	3.00	CFS-A03053-300B
30 meters	5.00	CFS-A03053-500B
60 meters	1.00	CFS-A06053-100B
60 meters	1.50	CFS-A06053-150B
60 meters	3.00	CFS-A06053-300B
60 meters	5.00	CFS-A06053-500B

**PRIMARY APPLICATIONS**

Amines  
Flavors  
Fragrances  
Hydrocarbons  
Pesticides  
PCBs  
Phenols  
Sulfur compounds  
EPA Methods  
504, 551, 1618  
NIOSH Methods  
1300-1301,  
1400-1403,  
1450, 1501, 2005

**VB-35**

(35%Phenyl)-methylpolysiloxane

**REPLACES**

DB-35, AT-35, MDN-35, DB-35ms, Rtx-35, BP-35, HP-35, Rtx-35MS, 007-11, HP-35MS, Sup-Herb, ZB-35

0.25 mm ID	df	Prod No
15 meters	0.25	CFS-C01525-025B
15 meters	0.50	CFS-C01525-050B
30 meters	0.25	CFS-C03025-025B
30 meters	0.50	CFS-C03025-050B
60 meters	0.25	CFS-C06025-025B
60 meters	0.50	CFS-C06025-050B
0.32 mm ID	df	Prod No
15 meters	0.25	CFS-C01532-025B
15 meters	0.50	CFS-C01532-050B
30 meters	0.25	CFS-C03032-025B
30 meters	0.50	CFS-C03032-050B

0.32 mm ID, cont'd	Prod No	
60 meters	0.25	CFS-C06032-025B
60 meters	0.50	CFS-C06032-050B
0.53 mm ID	df	Prod No
15 meters	0.50	CFS-C01553-050B
15 meters	1.00	CFS-C01553-100B
30 meters	0.50	CFS-C03053-050B
30 meters	1.00	CFS-C03053-100B
60 meters	0.50	CFS-C06053-050B
60 meters	1.00	CFS-C06053-100B

**PRIMARY APPLICATIONS**

Drugs  
Pesticides  
Herbicides  
PAHs  
Pharmaceuticals  
PCBs  
EPA Method 8081A  
(organochlorine pesticides)

**TO ORDER**

Toll-free 877-737-1887  
Tel . . . . .360-697-9199  
Fax . . . . .360-697-6682

columns@vici.com

## VB-5

(5% Phenyl)-methylpolysiloxane

## PRIMARY APPLICATIONS

Drugs  
Herbicides  
Hydrocarbons  
PCBs  
Pesticides  
Phenols  
Semi-volatiles  
Sulfur compounds

0.10 mm ID	df	Prod No
10 meters	0.10	CFS-B01010-010B
10 meters	0.20	CFS-B01010-020B
20 meters	0.10	CFS-B02010-010B
20 meters	0.20	CFS-B02010-020B
0.18 mm ID	df	Prod No
10 meters	0.18	CFS-B01018-018B
10 meters	0.40	CFS-B01018-040B
20 meters	0.18	CFS-B02018-018B
20 meters	0.40	CFS-B02018-040B
30 meters	0.18	CFS-B03018-018B
30 meters	0.40	CFS-B03018-040B
40 meters	0.18	CFS-B04018-018B
40 meters	0.40	CFS-B04018-040B
0.25 mm ID	df	Prod No
15 meters	0.10	CFS-B01525-010B
15 meters	0.25	CFS-B01525-025B
15 meters	0.50	CFS-B01525-050B
15 meters	1.00	CFS-B01525-100B
30 meters	0.10	CFS-B03025-010B
30 meters	0.25	CFS-B03025-025B
30 meters	0.50	CFS-B03025-050B
30 meters	1.00	CFS-B03025-100B
60 meters	0.10	CFS-B06025-010B
60 meters	0.25	CFS-B06025-025B
60 meters	0.50	CFS-B06025-050B
60 meters	1.00	CFS-B06025-100B
0.32 mm ID	df	Prod No
15 meters	0.10	CFS-B01532-010B
15 meters	0.25	CFS-B01532-025B
15 meters	0.50	CFS-B01532-050B
15 meters	1.00	CFS-B01532-100B
15 meters	2.00	CFS-B01532-200B
15 meters	3.00	CFS-B01532-300B
15 meters	5.00	CFS-B01532-500B

0.32 mm ID, cont'd	Prod No	
30 meters	0.10	CFS-B03032-010B
30 meters	0.25	CFS-B03032-025B
30 meters	0.50	CFS-B03032-050B
30 meters	1.00	CFS-B03032-100B
30 meters	2.00	CFS-B03032-200B
30 meters	3.00	CFS-B03032-300B
30 meters	5.00	CFS-B03032-500B
0.53 mm ID	df	Prod No
15 meters	0.50	CFS-B01553-050B
15 meters	1.00	CFS-B01553-100B
15 meters	1.50	CFS-B01553-150B
15 meters	2.00	CFS-B01553-200B
15 meters	2.65	CFS-B01553-265B
15 meters	3.00	CFS-B01553-300B
15 meters	5.00	CFS-B01553-500B
30 meters	0.50	CFS-B03053-050B
30 meters	1.00	CFS-B03053-100B
30 meters	1.50	CFS-B03053-150B
30 meters	2.65	CFS-B03053-265B
30 meters	3.00	CFS-B03053-300B
30 meters	5.00	CFS-B03053-500B
60 meters	1.00	CFS-B06053-100B
60 meters	1.50	CFS-B06053-150B
60 meters	2.00	CFS-B06053-200B
60 meters	2.65	CFS-B06053-265B
60 meters	3.00	CFS-B06053-300B
60 meters	5.00	CFS-B06053-500B

## REPLACES

DB-5, DB-5ms,  
HP-5, HP-5MS,  
Ultra-5, Rtx-5, Rtx-  
5MS, Rtx-5sil MS,  
SPB-5, MDN-5,  
BP-5, CP-Sil 8 CB,  
GB-5, 007-5, OV-5,  
SE-54, AT-5, and  
ZB-5

## VB-50/608

(50%Phenyl)-methylpolysiloxane

## PRIMARY APPLICATIONS

Drugs  
Pharmaceuticals  
Herbicides  
Steroids  
PAHs  
Tocopherols  
PCBs  
EPA Methods  
Pesticides  
508, 608 and 8080

0.25 mm ID	df	Prod No
15 meters	0.25	CFS-D01525-025B
15 meters	0.50	CFS-D01525-050B
30 meters	0.15	CFS-D03025-015B
30 meters	0.25	CFS-D03025-025B
30 meters	0.50	CFS-D03025-050B
60 meters	0.25	CFS-D06025-025B
60 meters	0.50	CFS-D06025-050B
0.32 mm ID	df	Prod No
15 meters	0.25	CFS-D01532-025B
15 meters	0.50	CFS-D01532-050B
15 meters	1.00	CFS-D01532-100B
30 meters	0.25	CFS-D03032-025B
30 meters	0.50	CFS-D03032-050B
30 meters	1.00	CFS-D03032-100B

0.32 mm ID, cont'd	Prod No	
60 meters	0.25	CFS-D06032-025B
60 meters	0.50	CFS-D06032-050B
60 meters	1.00	CFS-D06032-100B
0.53 mm ID	df	Prod No
15 meters	0.50	CFS-D01553-050B
15 meters	0.83	CFS-D01553-083B
15 meters	1.00	CFS-D01553-100B
30 meters	0.50	CFS-D03053-050B
30 meters	0.83	CFS-D03053-083B
30 meters	1.00	CFS-D03053-100B
60 meters	0.50	CFS-D06053-050B
60 meters	0.83	CFS-D06053-083B
60 meters	1.00	CFS-D06053-100B

## REPLACES

DB-17, AT-50,  
SP-2250, DB-17ms,  
BPX-50, SP-17,  
DB-608, 007-17,  
SPB-608, HP-50+,  
SPB-50, ZB-50,  
Rtx-50

## GC CAPILLARY COLUMNS

## VB-Wax

## 100% bonded polyethylene glycol

## REPLACES

DB-WAX, DB-WAXetr, HP-WAX, HP-InnoWAX, HP-20M, CB-WAX, Stabilwax, RtxWAX, SUPEROX II, SUPELCOWAX-10, BP-20, CP-WAX, 52 CB, GB-WAX, 007-CW, OV-WAX, AT-WAX, and ZB-WAX

0.10 mm ID	df	Prod No	0.32 mm ID	df	Prod No
10 meters	0.10	CFS-G01010-010A	15 meters	0.25	CFS-G01532-025A
20 meters	0.10	CFS-G02010-010A	15 meters	0.50	CFS-G01532-050A
			15 meters	1.00	CFS-G01532-100A
0.18 mm ID	df	Prod No	30 meters	0.25	CFS-G03032-025A
10 meters	0.18	CFS-G01018-018A	30 meters	0.50	CFS-G03032-050A
20 meters	0.18	CFS-G02018-018A	30 meters	1.00	CFS-G03032-100A
0.25 mm ID	df	Prod No	60 meters	0.25	CFS-G06032-025A
15 meters	0.25	CFS-G01525-025A	60 meters	0.50	CFS-G06032-050A
30 meters	0.25	CFS-G03025-025A	0.53 mm ID	df	Prod No
60 meters	0.25	CFS-G06025-025A	15 meters	0.50	CFS-G01553-050A
			15 meters	1.00	CFS-G01553-100A
			30 meters	0.50	CFS-G03053-050A
			30 meters	1.00	CFS-G03053-100A
			60 meters	1.00	CFS-G06053-100A

## PRIMARY APPLICATIONS

Alcohols  
Aldehydes  
Aromatics  
Flavors  
Fragrances  
Organic Acids  
Solvents

## VB-624/1301

## (6% Cyanopropyl-phenyl)-methylpolysiloxane

## REPLACES

DB-624, HP-624, HP-VOC, Rtx-624, Rtx-Volatiles, BP-624, Vocol, 007-624, 007-502, NON-PAKD, 624, ZB-624

0.18 mm ID	df	Prod No	0.32 mm ID	df	Prod No
10 meters	1.00	CFS-E01018-100A	15 meters	1.80	CFS-E01532-180A
20 meters	1.00	CFS-E02018-100A	30 meters	1.80	CFS-E03032-180A
30 meters	1.00	CFS-E03018-100A	60 meters	1.80	CFS-E06032-180A
40 meters	1.00	CFS-E04018-100A	0.53 mm ID	df	Prod No
0.20 mm ID	df	Prod No	15 meters	3.00	CFS-E01553-300A
25 meters	1.12	CFS-E02520-112A	30 meters	3.00	CFS-E03053-300A
			60 meters	3.00	CFS-E06053-300A
0.25 mm ID	df	Prod No	75 meters	3.00	CFS-E07553-300A
15 meters	1.40	CFS-E01525-140A			
30 meters	1.40	CFS-E03025-140A			
60 meters	1.40	CFS-E06025-140A			

## PRIMARY APPLICATIONS

EPA Methods  
501.3  
502.2  
503.1  
524.2  
601  
602  
8010  
8015  
8020  
8240

## VB-1701

## (14% Cyanopropyl-phenyl)-methylpolysiloxane

## REPLACES

DB-1701, 007-1701, HP-1701, CP-Sil 19 CB, Rtx-1701, SPB-1701, BP-10, ZB-1701

0.25 mm ID	df	Prod No	0.32 mm ID, cont'd	Prod No	
15 meters	0.25	CFS-F01525-025A	60 meters	0.25	CFS-F06032-025A
15 meters	0.50	CFS-F01525-050A	60 meters	0.50	CFS-F06032-050A
30 meters	0.25	CFS-F03025-025A	60 meters	1.00	CFS-F06032-100A
30 meters	0.50	CFS-F03025-050A	0.53 mm ID	df	Prod No
60 meters	0.25	CFS-F06025-025A	15 meters	0.50	CFS-F01553-050A
60 meters	0.50	CFS-F06025-050A	15 meters	1.00	CFS-F01553-100A
0.32 mm ID	df	Prod No	30 meters	0.50	CFS-F03053-050A
15 meters	0.25	CFS-F01532-025A	30 meters	1.00	CFS-F03053-100A
15 meters	0.50	CFS-F01532-050A	60 meters	0.50	CFS-F06053-050A
15 meters	1.00	CFS-F01532-100A	60 meters	1.00	CFS-F06053-100A
30 meters	0.25	CFS-F03032-025A			
30 meters	0.50	CFS-F03032-050A			
30 meters	1.00	CFS-F03032-100A			

## PRIMARY APPLICATIONS

Drugs  
PAHs  
PCBs  
Pesticides  
Phenols  
Solvents  
Tranquilizers


## TO ORDER

Toll-free 877-737-1887  
Tel . . . . . 360-697-9199  
Fax . . . . . 360-697-6682

columns@vici.com




## VB-Wax

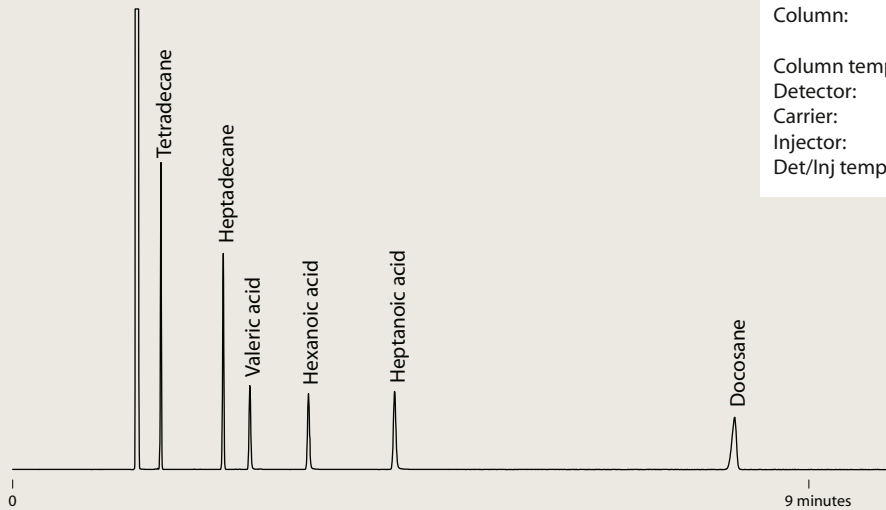**FREE FATTY ACIDS**


Column: VB-Wax  
 30m x .25mm x .25 $\mu$ m  
 Column temp: 170°C isothermal  
 Detector: FID  
 Carrier: Hydrogen at 40 cm/sec  
 Injector: Split 100:1  
 Det/Inj temp: 220°C

## VB-Wax

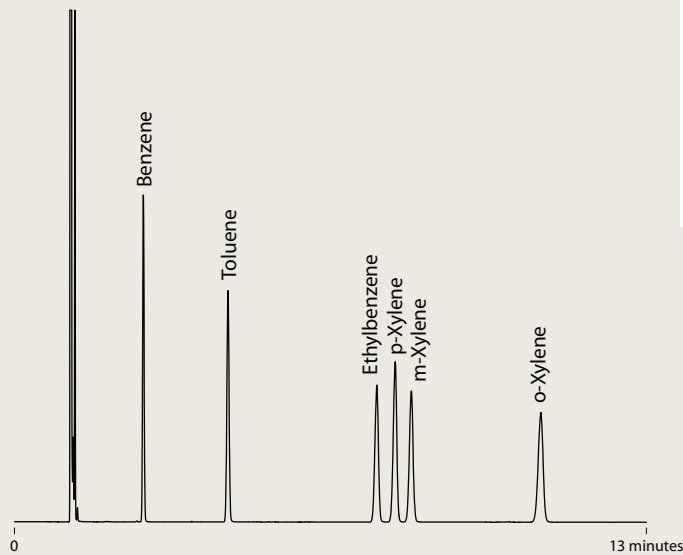**BTEX**

Column: VB-Wax  
 30m x .25mm x .25 $\mu$ m  
 Column temp: 40°C isothermal  
 Detector: FID  
 Carrier: Hydrogen  
 Injector: .5  $\mu$ l 100:1 split  
 Det/Inj temp: 220°C

## VB-Wax

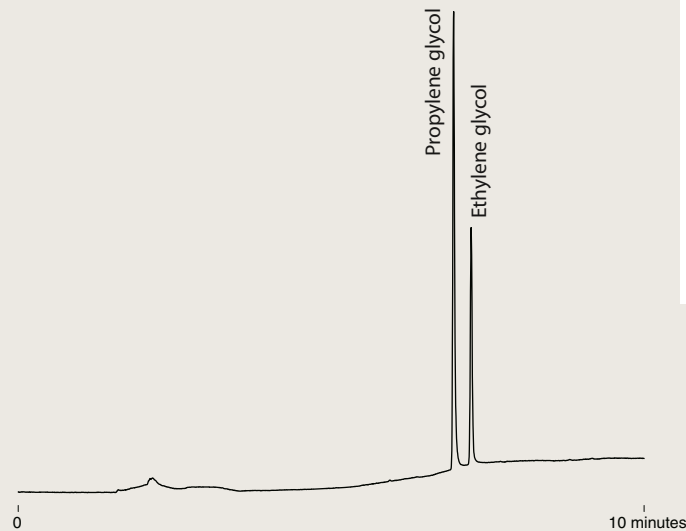**GLYCOLS**

Sample: 50 ppm EG, PG  
 Column: VB-Wax  
 30m x .53mm x 1.00 $\mu$ m  
 Column temp: 80°C for 1 min,  
 to 200°C @ 20°C/min,  
 hold 5 min  
 Detector: FID  
 Carrier: Helium at 5 psi  
 Injector: 1  $\mu$ l splitless, .5 min  
 Det/Inj temp: 220°C

GC CAPILLARY COLUMNS

Molesieve 5Å

Molesieve 5Å

REPLACES

- GS-Molesieve 5A
- HP-PLOT Molesieve
- CP-Molesieve 5A
- Rt-Msieve-5A
- MXT-Msieve-51
- PLT-5A

ValcoPLOT Molesieve 5Å PLOT columns offer greatly enhanced analytical efficiency at economical prices. Our proprietary bonding technology ensures that the particles stay put even when columns are used with valves. Our thick film columns separate Ar/O<sub>2</sub> without the need for cryogenic equipment. The thin film columns offer fast elution of carbon monoxide with near perfect peak symmetry.

**PRIMARY APPLICATIONS**  
Gases

**TO ORDER**

For prices or more information about your specific application, contact VICI Metronics:

Toll-free 877-737-1887  
Tel .....360-697-9199  
Fax .....360-697-6682

[columns@vici.com](mailto:columns@vici.com)

**Fused silica**

0.53 mm ID	df	Prod No
15 meters	20	CFS-X1553-200
15 meters	50	CFS-X1553-500
30 meters	20	CFS-X3053-200
30 meters	50	CFS-X3053-500

**Stainless steel**

0.53 mm ID	df (µm)	Prod No
15 meters	20	CSS-X1553-200
30 meters	20	CSS-X3053-200
30 meters	50	CSS-X3053-500


ValcoPLOT Molesieve 5Å – Stainless steel



**MOLESIEVE TEST MIX**

Column: Stainless steel  
Molesieve PLOT  
30 m x 0.53 mm x 20.0 µm  
Column temp: 40°C isothermal  
Detector: PDD Model D-4-I

ValcoPLOT Molesieve 5Å – Fused silica

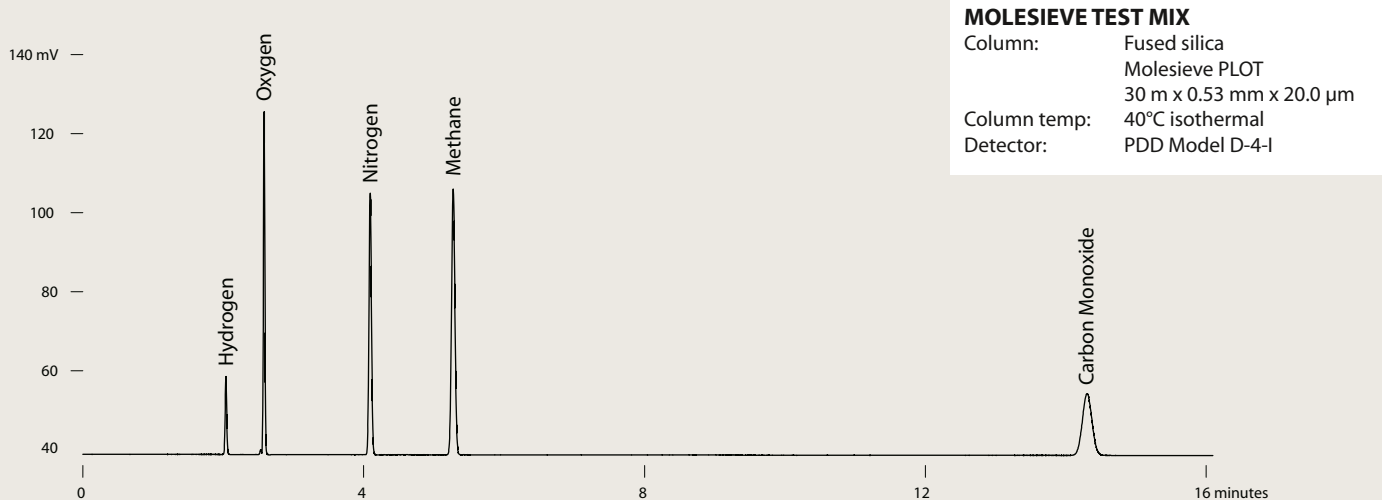



**MOLESIEVE TEST MIX**

Column: Fused silica  
Molesieve PLOT  
30 m x 0.53 mm x 20.0 µm  
Column temp: 40°C isothermal  
Detector: PDD Model D-4-I

ValcoPLOT Molesieve 5Å – Fused silica

**AIR**

Column: Fused silica  
 Molesieve PLOT  
 30 m x 0.53 mm x 50.0 μm  
 Column temp: 40°C isothermal  
 Detector: PDD Model D-4-I  
 Carrier: Helium @ 25cm/sec

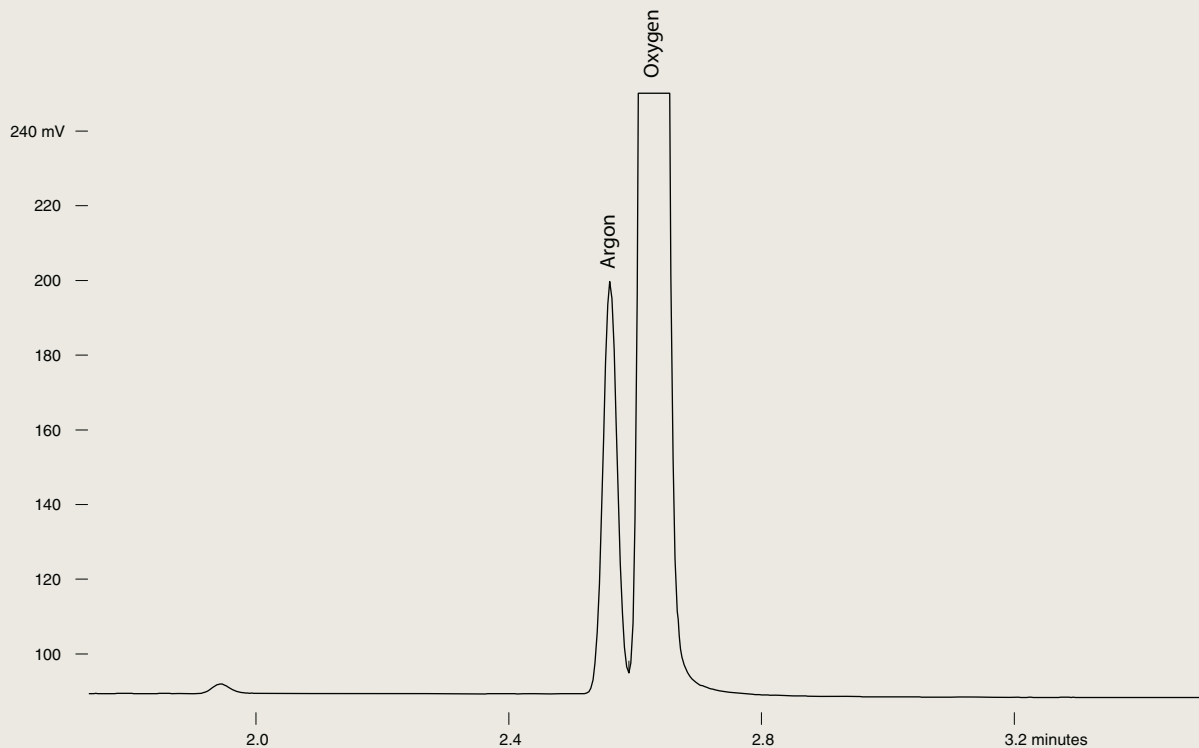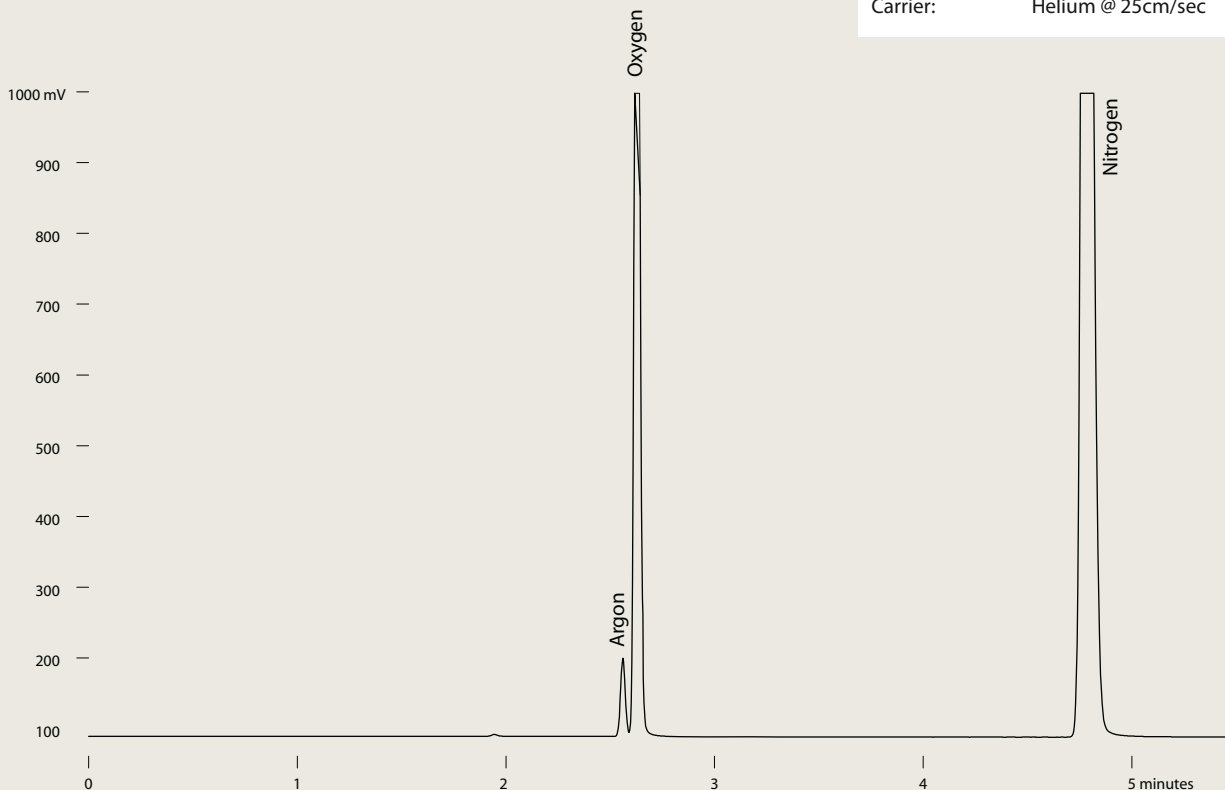

## GC CAPILLARY COLUMNS

## Alumina

## Aluminum oxide

## REPLACES

GS-Alumina  
HP-PLOT Al2O3  
CP-Al2O3/KCl  
CP-Al2O3/Na2SO4  
Rt-alumina-PLOT  
Al2O3/KCl  
Al2O3/Na2SO4

With ValcoPLOT Al<sub>2</sub>O<sub>3</sub> PLOT columns there's no need for cryogenic equipment to analyze C1 - C5 hydrocarbons in a main stream of C1 - C5 hydrocarbons. ValcoPLOT Al<sub>2</sub>O<sub>3</sub> columns are deactivated with small salt crystals stable to 200°C. KCl deactivation produces a relatively apolar column while Na<sub>2</sub>SO<sub>4</sub> produces columns exhibiting increased retention of unsaturated hydrocarbons.

## PRIMARY APPLICATIONS

C1 - C5 hydrocarbons

## VP-Alumina/KCl

## VP-Alumina/Na2SO4

## Fused silica

0.53 mm ID	df	Prod No
15 meters	10	CFS-Y1553-100
30 meters	10	CFS-Y3053-100
50 meters	10	CFS-Y5053-100

## Fused silica

0.53 mm ID	df	Prod No
15 meters	10	CFS-Z1553-100
30 meters	10	CFS-Z3053-100
50 meters	10	CFS-Z5053-100

## ValcoPLOT A

## High purity Divinylbenzene/ethyleneglycoldimethacrylate

## Fused silica

0.32 mm ID	df (µm)	Prod No
15 meters	10	CFS-PA1532-100
30 meters	10	CFS-PA3032-100

0.53 mm ID	df	Prod No
15 meters	20	CFS-PA1553-200
30 meters	30	CFS-PA3053-200

## PRIMARY APPLICATIONS

Solvents  
Light gases  
Light hydrocarbons  
Residual solvents

## ValcoPLOT D

## High purity Divinylbenzene

## Fused silica

0.32 mm ID	df	Prod No
15 meters	10	CFS-PD1532-100
30 meters	10	CFS-PD3032-100

0.53 mm ID	df	Prod No
15 meters	20	CFS-PD1553-200
30 meters	20	CFS-PD3053-200

## PRIMARY APPLICATIONS

Solvents  
Hydrocarbons  
Alcohols  
Sulfur compounds  
Residual solvents  
Halogenated hydrocarbons

## ValcoPLOT Q

## Divinylbenzene

## Fused silica

0.32 mm ID	df	Prod No
15 meters	10	CFS-PQ1532-100
30 meters	10	CFS-PQ3032-100

0.53 mm ID	df	Prod No
15 meters	20	CFS-PQ1553-200
30 meters	20	CFS-PQ3053-200

## PRIMARY APPLICATIONS

Note: We highly recommend ValcoPLOT D, which has similar retention characteristics but is made from higher purity raw materials.

## TO ORDER

Toll-free 877-737-1887  
Tel .....360-697-9199  
Fax .....360-697-6682


columns@vici.com

## ValcoPLOT A

**C1 - C3 HYDROCARBONS**


Column: HayeSep A PLOT  
30m x .53mm x 20.0µm  
Column temp: 60°C isothermal  
Detector: PDD  
Carrier: Helium  
Det/Inj temp: 165°C

## ValcoPLOT D

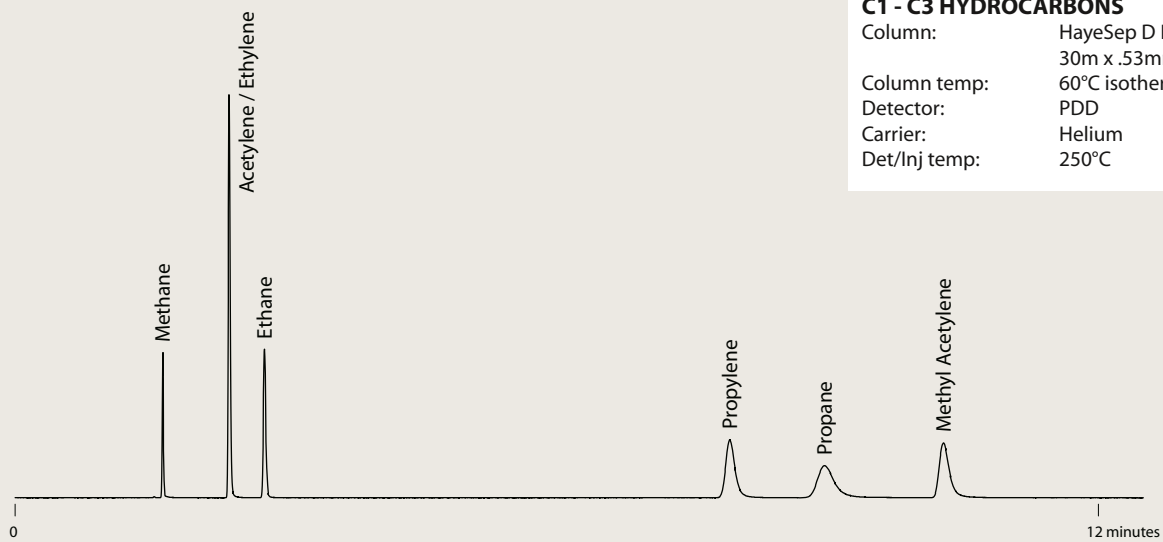**C1 - C3 HYDROCARBONS**

Column: HayeSep D PLOT  
30m x .53mm x 20.0µm  
Column temp: 60°C isothermal  
Detector: PDD  
Carrier: Helium  
Det/Inj temp: 250°C

## ValcoPLOT D

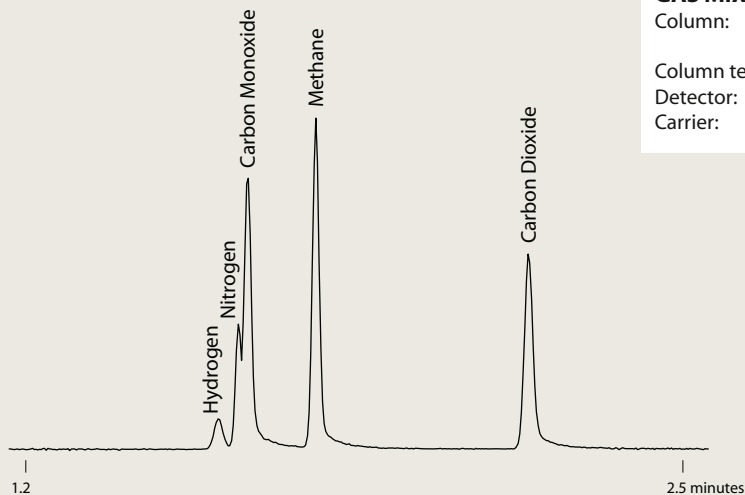**GAS MIXTURE**

Column: HayeSep D PLOT  
30m x .53mm x 20.0µm  
Column temp: 40°C isothermal  
Detector: PDD  
Carrier: Helium

## GC CAPILLARY COLUMNS

**ValcoPLOT B***Divinylbenzene/polyethyleneimine***Fused silica**

<b>0.32 mm ID</b>	<i>df</i>	<i>Prod No</i>	<b>0.53 mm ID</b>	<i>df</i>	<i>Prod No</i>
15 meters	10	CFS-PB1532-100	15 meters	20	CFS-PB1553-200
30 meters	10	CFS-PB3032-100	30 meters	20	CFS-PB3053-200

**ValcoPLOT C***Divinylbenzene/acrylonitrile***Fused silica**

<b>0.32 mm ID</b>	<i>df</i>	<i>Prod No</i>	<b>0.53 mm ID</b>	<i>df</i>	<i>Prod No</i>
15 meters	10	CFS-PC1532-100	15 meters	20	CFS-PC1553-200
30 meters	10	CFS-PC3032-100	30 meters	20	CFS-PC3053-200

**ValcoPLOT N***Divinylbenzene/ethyleneglycoldimethacrylate***Fused silica**

<b>0.32 mm ID</b>	<i>df</i>	<i>Prod No</i>	<b>0.53 mm ID</b>	<i>df</i>	<i>Prod No</i>
15 meters	10	CFS-PN1532-100	15 meters	20	CFS-PN1553-200
30 meters	10	CFS-PN3032-100	30 meters	20	CFS-PN3053-200

**ValcoPLOT P***Divinylbenzene/styrene***Fused silica**

<b>0.32 mm ID</b>	<i>df</i>	<i>Prod No</i>	<b>0.53 mm ID</b>	<i>df</i>	<i>Prod No</i>
15 meters	10	CFS-PP1532-100	15 meters	20	CFS-PP1553-200
30 meters	10	CFS-PP3032-100	30 meters	20	CFS-PP3053-200

**ValcoPLOT R***Divinylbenzene/N-vinyl-2-pyrrolidinone***Fused silica**

<b>0.32 mm ID</b>	<i>df</i>	<i>Prod No</i>	<b>0.53 mm ID</b>	<i>df</i>	<i>Prod No</i>
15 meters	10	CFS-PR1532-100	15 meters	20	CFS-PR1553-200
30 meters	10	CFS-PR3032-100	30 meters	20	CFS-PR3053-200

**ValcoPLOT S***Divinylbenzene/4-vinyl-pyridine***Fused silica**

<b>0.32 mm ID</b>	<i>df</i>	<i>Prod No</i>	<b>0.53 mm ID</b>	<i>df</i>	<i>Prod No</i>
15 meters	10	CFS-PS1532-100	15 meters	20	CFS-PS1553-200
30 meters	10	CFS-PS3032-100	30 meters	20	CFS-PS3053-200

**TO ORDER**

For prices or more information about your specific application, contact VICI Metronics:

Toll-free 877-737-1887  
Tel .....360-697-9199  
Fax .....360-697-6682

**columns@vici.com**



- Reduce breakdown of Endrin and DDT
- Increase the interval between liner changes

DDT and Endrin are easily degraded in the injection port; with non-deactivated liners and those filled with non-deactivated glass wool, Endrin breakdown can be as high as 98%. EPA method 8081A states, "If degradation of either DDT or Endrin exceeds 15%, take corrective action before proceeding with calibration."



VICI reduced breakdown liners are produced by applying a highly-crosslinked siloxane over a conventionally deactivated liner. The resulting liner contributes less to breakdown than any other component of the injection system.



### Reduced breakdown injection port liners

Package of 5 liners.

For injector	Description	Prod No
Agilent/Thermo	2 mm straight splitless	LNR-HP2-5
	4 mm straight splitless	LNR-HP4-5
	2 mm gooseneck	LNR-GS2-5
	4 mm gooseneck	LNR-GS4-5
	4 mm double gooseneck	LNR-DGS4-5
Gerstel CIS-4/PTV	Baffled	LNR-CIS4-B-5
Varian CP-1177	2 mm gooseneck	LNR-GS2-5
	4 mm gooseneck	LNR-GS4-5
Varian 1078/1079	2 mm gooseneck	LNR-VARGS2-5
	3.4 mm gooseneck	LNR-VAR3.4-5

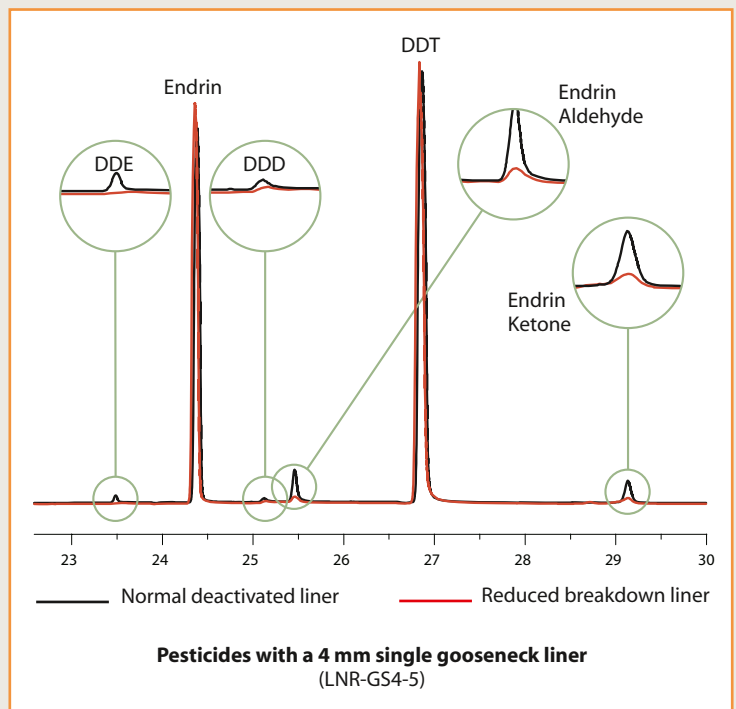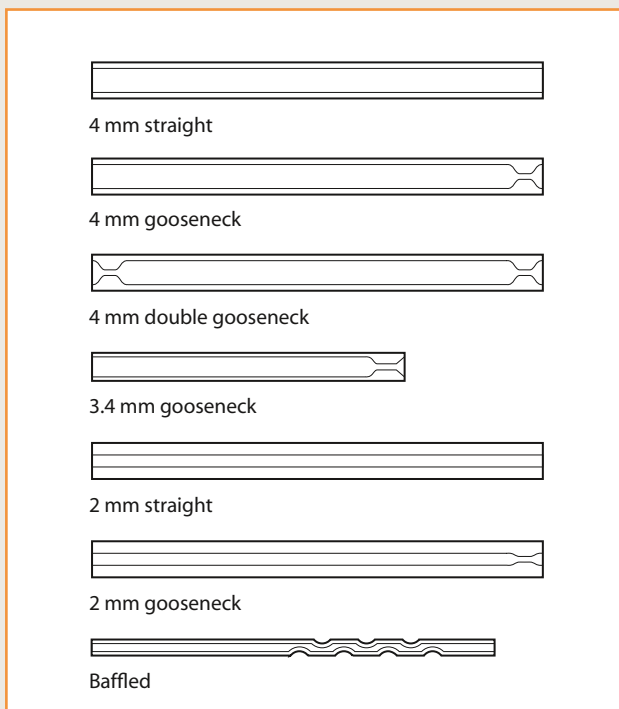

# Gas purification

## GAS-SPECIFIC PURIFIERS AND CONTAMINANT TRAPS

from VICI Metronics

### Gas Specific Purifiers and Contaminant Traps


- Original equipment in Agilent® Mass Spec and LC Mass Spec
- Provide point-of-use gas purification of helium, hydrogen, methane, nitrogen, carbon dioxide, or air
- Reduce gas impurities from high PPM to low PPB levels
- Decrease baseline noise and increase GC/MS sensitivity
- Replace three traps with one purifier

Gas purity is critical to optimum GC performance. Several types of contaminants are detrimental – notably moisture, hydrocarbons, and oxygen. VICI Metronics gas purifier modules are designed to be placed in-line with the GC carrier or detector gas supply to remove these contaminants from the analytical gases prior to their entry into the GC.

Gas purification is optimized by a multiple bed format. Each bed functions at a lower contaminant concentration, resulting in a series of contaminant concentration gradients across the length of the gas purifier.

VICI Metronics gas purifiers dramatically reduce contaminant levels and absorb a greater variety of contaminants than other gas purification products. Advanced materials and design features guarantee that the modules will


produce gases that are at least a factor of ten higher than a 99.9999% “chromatography grade” cylinder of gas when the purifier is supplied by a 99.995% cylinder. The cost difference between the two grades of gas will pay for the cost of the gas purifier several times over during its operating life.

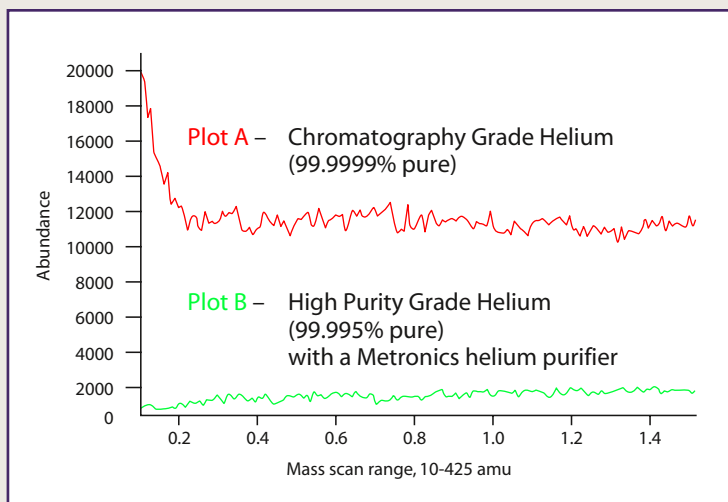



Every connection in your gas delivery system has the potential for leaks; the more fittings you have, the greater the potential. Using a VICI Metronics purifier or trap (A) minimizes the

number of fittings as compared to a typical manifold system (B) or contaminant trap configuration with multiple components (C).

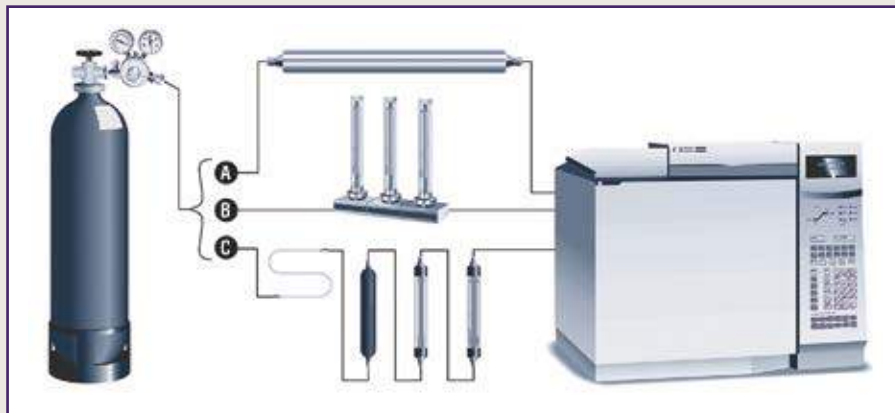

**SPECS**  
 22.5" long x 1.5" diameter  
 (purifiers noted with \* in the charts are 12" long)  
 Max inlet pressure 1000 psi (6895 kPa)  
 Recommended flow 500 mL/min

**Gas specific purifiers**

Description	1/8" fitting	1/4" fitting
Helium purifier	P100-1	P100-2
Hydrogen purifier	P200-1	P200-2
Nitrogen purifier	P300-1	P300-2
Nitrogen purifier for LC/MS apps	P310-1	P310-2
Purifier for nitrogen generators	P350-1	P350-2
Air purifier	P400-1	P400-2
Methane purifier*	P500-1	P500-2
Carbon dioxide (gas) purifier	P600-1	P600-2
Carbon dioxide (liquid) purifier	P700-1	P700-2

**Contaminant traps**

Description	1/8" fitting	1/4" fitting
Moisture trap	T100-1	T100-2
Hydrocarbon trap	T200-1	T200-2
Oxygen trap	T300-1	T300-2
Sulfur trap*	T400-1	T400-2
Sulfur trap	T401-1	T401-2
Mercury trap*	T700-1	T700-2



\*12" long

**TO ORDER**

For prices or more information about our gas purifiers, contact VICI Metronics:

Toll-free 877-737-1887  
 Tel .....360-697-9199  
 Fax.....360-697-6682

[vicimetronics.com](http://vicimetronics.com)



**PPB at outlet (based on 50 ppm nominal inlet concentration level)**

Description	CO	CO <sub>2</sub>	O <sub>2</sub>	H <sub>2</sub> O	Sulfur compounds	Non-methane hydrocarbons
Helium purifier	<1	<1	<1	<1	<1	<3
Hydrogen purifier	<1	<1	<1	<1	<1	<3
Air purifier				<1		<3
Methane purifier	<1	<1	<1	<1	<1	<3
Nitrogen purifier	<1	<1	<1	<1	<1	<3
Nitrogen purifier for LC/MS apps				<25	<25	<25
Purifier for nitrogen generators				<25	<25	<25
Moisture trap				<1		
Hydrocarbon trap						<3
Oxygen trap			<1	<1		
Sulfur trap				<1	<1	

# Analytical syringes

PLUS MININERT VALVES AND MICRO VALVES

from VICI Precision Sampling

## Micro Valves for GC and LC

- 200 psi, .060" bore
- Compact 1" design
- Convenient panel mount
- Variety of configurations

Simplify your liquid or gas handling application with a VICI Precision Sampling Micro valve. The unique design of the fitting detail allows a leak-free seal with no potential for rotor damage from overtightening. Internal parts are PEEK and PTFE.



(Fittings not included. For example fittings, see pages 68-69.)

## Micro valves for GC and LC

1/4-28

	Prod No				
"T" flow path	3 ports	PS-660100	3 PORT	4 PORT	"T"
	4 ports	PS-660110			
180° flow path	2 ports	PS-660200	2 PORT	4 PORT	180°
	4 ports	PS-660210			
90° flow path	2 ports	PS-660300	2 PORT	3 PORT	90°
	3 ports	PS-660310			
	4 ports	PS-660320			

### SPECS

200 psi gas <sup>1</sup>  
 500 psi liquid <sup>2</sup>  
 .060" bore  
 1/4-28 fitting detail  
 All polymer-based materials

<sup>1</sup> Tested with Helium using 1/16" OD x 0.84 mm ID PTFE tubing with PEEK collapsible ferrules

<sup>2</sup> Tested with Isopropanol using 1/8" OD x 0.75 mm ID PTFE tubing with CTFE collapsible ferrules

### MORE INFORMATION

1/4-28 fittings . . . . p.68-9

### TO ORDER

Toll-free 800-828-1653  
 Tel . . . . .225-927-1128  
 Fax . . . . .225-923-1331

### FOR OUR COMPLETE LINE OF PRODUCTS

Visit our website at [viciprecisionsampling.com](http://viciprecisionsampling.com) or call us for a catalog:



VICI Precision Sampling's patented Pressure-Lok® syringes feature a PTFE plunger tip, stress-formed by a special process to ensure a leak-tight seal. The self-lubricating plunger tip stays smooth for the life of the syringe, with none of the seizing or residue buildup associated with conventional all-metal plungers.

The needle is sealed by a PTFE sleeve, or packing, which effectively isolates the sample from the needle cement and prevents any possible dissolution of the adhesive or contamination of the sample. All Pressure-Lok syringes feature ultra smooth bores, easily replaceable parts, low dead volume, crisp clean graduations, and precision calibration.

**Series A-2**

for GC

The A-2 features a push-button valve for 250 psi sample storage in syringes as small as 25 µl. Small liquid samples with low-boiling components are not lost through evaporation, as often occurs with ordinary syringes.


The positive rear stop (in 250 µl and larger sizes) prevents plunger blowout at elevated pressures. The Series A-2 syringe has all the standard Pressure-Lok features such as a PTFE plunger tip, PTFE-sealed needle, and ultrasmooth bore. Replacement components are available for easy repairs.

**SPECS**

Removable needles  
Bevel, open end  
Needle size:  
.028" x .005" x 2"  
(25, 50, and  
100 µl)  
.029" x .012" x 2"  
(all other  
sample sizes)  
250 psi max,  
gases and liquids




Sample size	Standard	Luer
	Prod No	Prod No
25 µl	PS-050023	PS-050043
50 µl	PS-050024	PS-050044
100 µl	PS-050025	PS-050045
250 µl	PS-050031	PS-050051
500 µl	PS-050032	PS-050052
1 ml	PS-050033	PS-050053
2 ml	PS-050034	PS-050054
5 ml	PS-050035	PS-050055
10 ml	PS-050036	PS-050056

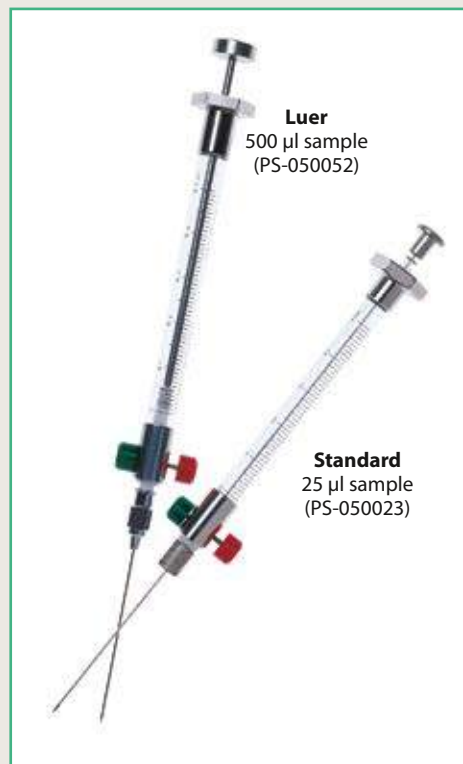Replacement needles (Pkg/3)	Bevel, open end	Side port, taper
Size	Prod No	Prod No
<b>Pressure-Lok</b>		
.028" x .005" x 2"	PS-943050	—
.029" x .012" x 2"	PS-943051	PS-943052
<b>Luer</b>		
.028" x .006" x 2"	PS-943060	—
.028" x .016" x 2"	PS-943061	PS-943062



**SAFETY NOTE**  
To prevent possible injury, proper safety precautions should always be observed when pressurizing glass cylinders such as syringes.  
Not for medical use.

**NEEDLE TIPS**

-  **Blunt, open end**
-  **Bevel, open end**
-  **Side port, taper**

## ANALYTICAL SYRINGES

### Series C-160

for GC

The C-160 offers day-in, day-out dependability at an economical price. A plunger tip of stress-formed virgin PTFE is self-lubricating and durable, and the PTFE needle seat at the rear of the needle prevents possible dissolution of the needle cement or contamination of the sample.

Choose between a fixed or removable needle version. Replacement needles are open end bevel type, .019" x .005" x 2.25", and come complete with an integral PTFE seal for a low dead volume connection and a leak-tight fit.


#### SPECS

Fixed and removable needles  
 Bevel, open end  
 Fixed needle size: .019" x .005" x 2"  
 Removable needle size: .019" x .005" x 2.25"  
 250 psi max, gases and liquids

	Fixed needle	Removable needle
Sample size	Prod No	Prod No
5 µl	PS-160021	PS-160221
10 µl	PS-160022	PS-160222
25 µl	PS-160023	PS-160223
50 µl	PS-160024	PS-160224
100 µl	PS-160025	PS-160225

**Replacement needles (Pkg/3)**      **Bevel, open end**

Size	Prod No
.019" x .005" x 2.25"	PS-123050

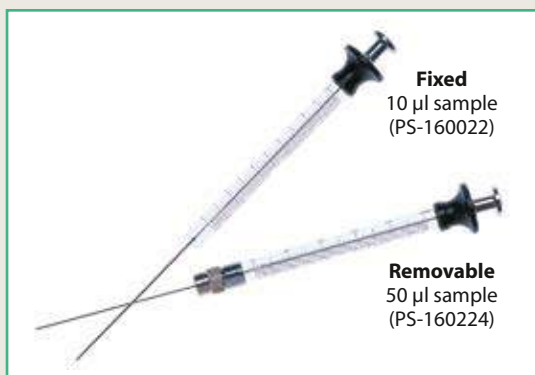

### Syringes for Valco, Cheminert, and Rheodyne HPLC injectors


Syringes used to fill a loop on a sample injection valve have needles with blunt, smooth ends. For a sample to be delivered with any repeatability, the end of the needle must contact the bottom of the valve's fitting detail uniformly and seal on the outside of the tip. All Precision Sampling syringes for valve injections have smooth, burr-free ends that fit the valve fitting details perfectly. The standard HPLC syringe is our basic C-160 with a 2" long 22 gauge blunt tip needle.

#### SPECS

Removable needles  
 Blunt tip, open end  
 Needle size: 22 gauge x 2"  
 250 psi max

	Fixed needle	Removable needle
Sample size	Prod No	Prod No
5 µl	PS-160021R	PS-160221R
10 µl	PS-160022R	PS-160222R
25 µl	PS-160023R	PS-160223R
50 µl	PS-160024R	PS-160224R
100 µl	PS-160025R	PS-160225R

**Replacement needles (Pkg/3)**      **Prod No**  
 PS-123050R

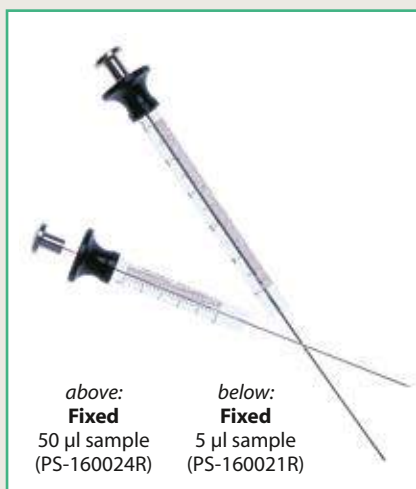

#### MORE INFORMATION

Fill ports . . . . . page 40  
 Luer adapters . . . . . 41

#### NEEDLE TIPS

**Blunt, open end**

**Bevel, open end**

**Side port, taper**

**TO ORDER**  
 Toll-free 800-828-1653  
 Tel . . . . . 225-927-1128  
 Fax . . . . . 225-923-1331

**FOR OUR COMPLETE LINE OF PRODUCTS**  
 Visit our website at [viciprecisionsampling.com](http://viciprecisionsampling.com) or call us for a catalog:

Mininert™ push-button valves are highly dependable, leak-tight closures for screw-cap vials and other laboratory containers. When used with a glass vial, only PTFE and glass are in contact with the contents. Their unique features make Mininert valves the ideal closure for calibration standards, air- or

moisture-sensitive fluids, derivatizing reagents, or volatile chemicals. Operation is extremely simple – push the green button to open the valve, insert the needle through the septum and take a sample, withdraw the needle, and push the red button to close the valve.



**Valves for vials**

The screw-cap Mininert is available in a variety of sizes. The crimp-top valve for 13 mm ID glassware slides into the neck of the vial and features a threaded flange which is turned to provide a leak-tight fit.

Pkg/12:	Cap / thread size	Prod No
	13 mm-425	PS-614158
	15 mm-425	PS-614160
	18 mm-400	PS-614161
	20 mm-400	PS-614170
	24 mm-400	PS-614163
	Crimp top	PS-614250

**Valves with threaded fittings**

Our threaded designs offer positive on/off fluid control as an in-line valve or syringe access as a termination valve at a sample point. In-line valves are 1/4-28 male to male or 1/4-28 female to female. Termination valves are offered in 1/4-28 male or female and 1/8" NPT male or female.

In-line valves	Prod No
1/4-28 male to male	PS-631205
1/4-28 female to female	PS-631206

Termination valves	Prod No
1/4-28 male	PS-631201
1/4-28 female	PS-631203
1/8" NPT male	PS-631202
1/8" NPT female	PS-631204



**Replacement septa and septum installation tool**

These silicone septa fit all Mininert valves. The installation tool is a handy device for quickly removing and replacing needle seal septa.

Septa, pkg/50	PS-644350
Installation tool	PS-644850



**Mininert syringe valves**

These convenient add-on valves allow our Series C and D syringes to store samples at up to 250 psi. The valve body is all PTFE, with a stainless steel stem. Also available to fit luer-tip syringes from any manufacturer. All accept traditional luer needles.

For C or D syringe	PS-654050
For Luer-tip syringe	PS-654051



**SPECS**

**TEMPERATURES**

Mininert valves can be used at temperature up to 40°C. However, after use at high temperatures, the valve may leak slightly when cooled to room temperature.

**MATERIALS**

PTFE is highly inert and may be used with most common materials. It is particularly useful for working with most acids and organic solvents. However, problems may be encountered when used with organometallics and some strong bases. We recommend actual exposure tests before use with any material.

**PRESSURE**

The sealing ability of Mininert valves is more than adequate for containing most volatile liquids and gases at low pressures. Mininert valves have been used as high as 120 psi without leakage, but this is **not** a recommendation for pressurizing glass containers to these levels. Such pressurization of glass containers can be extremely dangerous.

# General reference

## HELPFUL PRODUCT INFORMATION

This section contains background information to supplement the product discussions on the preceding pages. You will find a glossary of terms, safety and trademark information, and discussions of the mechanical and chemical properties of the materials used in the manufacturing of our products. Additional information, including a complete library of technical notes and manuals, can be found in the support section of our website at [www.vici.com](http://www.vici.com).

### Safety

1. Never tighten or loosen a fitting or valve connection while it is pressurized. Provisions should be made within the system to release pressure via suitable valve components.
2. Do not exceed pressure or temperature specifications. Note that in many cases, the system pressure is limited by the tubing used, not the fittings.
3. The use of toxic or hazardous fluids requires extra caution during operation or maintenance. The user is responsible for ensuring safe operation and for understanding the nature of the fluids and chemistry involved.
4. The use of thread lubricants or sealants is required only on tapered pipe threads. These sealants and lubricants may have different temperature limits or chemical compatibility than the valves or fittings.

#### CAUTION

The improper selection or use of components or systems described herein can cause personal injury or property damage.

The system designer and user are solely responsible for the selection of products suitable for the specific requirements of the application, as well as proper installation, operation, and maintenance of these products.

Compatibility with hazardous fluid streams, environmental conditions, and mechanical requirements are the responsibility of the user.



## Contact us

### EUROPE, MIDDLE EAST, ASIA, and AFRICA

#### VICI AG International

##### SALES

- Phone: Int + 41· 41· 925-6200
- Fax: Int + 41· 41· 925-6201
- Email: order@vici.ch

##### TECHNICAL

- Phone: Int + 41· 41· 925-6200
- Fax: Int + 41· 41· 925-6201
- Email: support@vici.ch

##### SERVICE

- Phone: Int + 41· 41· 925-6200
- Fax: Int + 41· 41· 925-6201

Parkstrasse 2  
CH-6214 Schenkon  
Switzerland  
info@vici.ch

### NORTH, CENTRAL, AND SOUTH AMERICA (except CANADA); AUSTRALIA and NEW ZEALAND

#### Valco Instruments Co. Inc.

##### SALES

- Phone: 713-688-9345  
800-367-8424 \*  
\* USA and Canada only
- Fax: 713-688-8106
- Email: sales\_usa@vici.com

##### TECHNICAL

- Phone: 713-688-9345
- Fax: 713-956-1649
- Email: tech\_usa@vici.com

##### SERVICE

- Phone: 713-688-9345
- Fax: 713-688-7618
- Email: service@vici.com

P.O. Box 55603  
Houston, TX 77255  
USA  
valco@vici.com

### CANADA

#### VICI Valco Instruments Canada Corporation

- Tollfree: 866-297-2626
- Phone: 613-342-2600
- Fax: 613-342-0111
- Email: canada@vici.com

26 Water Street East  
Brockville  
Canada K6V 1A1

## Warranty

This Limited Warranty gives the Buyer specific legal rights, and a Buyer may also have other rights that vary from state to state.

For a period of 365 calendar days from the date of shipment, Valco Instruments Company, Inc. (herein-after Seller) warrants the goods to be free from defect in material and workmanship to the original purchaser. During the warranty period, Seller agrees to repair or replace defective and/or nonconforming goods or parts without charge for material or labor OR at Seller's option demand return of the goods and tender repayment of the price. Buyer's exclusive remedy is repair or replacement of defective and nonconforming goods OR at Seller's option return of the goods and repayment of the price.

***Seller excludes and disclaims any liability for lost profits, personal injury, interruption of service, or for consequential incidental or special damages arising out of, resulting from, or relating in any manner to these goods.***

This Limited Warranty does not cover defects, damage, or nonconformity resulting from abuse, misuse, neglect, lack of reasonable care, modification, or the attachment of improper devices to the goods. This Limited Warranty does not cover expendable items, such as but not limited to valve seals or ferrules. This warranty is VOID when repairs are performed by a non-authorized service center or representative.

If you have any problem locating an authorized service center or representative, please call, fax, or write the Service Department, listed at left.

At Seller's option, repairs or replacements will be made on site or at the factory. If repairs or replacements are to be made at the factory, Buyer shall return the goods prepaid and bear all the risks of loss until delivered to the factory. If Seller returns the goods, they will be delivered prepaid and Seller will bear all risks of loss until delivery to Buyer. Buyer and Seller agree that this Limited Warranty shall be governed by and construed in accordance with the laws of the State of Texas.

***The warranties contained in this agreement are in lieu of all other warranties expressed or implied, including the warranties of merchantability and fitness for a particular purpose.***

This Limited Warranty supersedes all prior proposals or representations oral or written and constitutes the entire understanding regarding the warranties made by the Seller to Buyer. This Limited Warranty may not be expanded or modified except in writing signed by the parties hereto.

### SPECIFIC TERMS AND CONDITIONS OF SALE

Download specific terms and conditions of sales of VICI AG, Switzerland, from [www.vici.ch](http://www.vici.ch).

### GENERAL REFERENCE

#### **Stainless steel, Type 316**

This is the standard tubing material for chromatography, suitable for a wide variety of applications. It is cold drawn seamless, not welded, with close tolerances held on both ID and OD. We neither recommend nor offer Type 304 stainless steel for analytical applications.

Austenitic stainless steels may be used for most chromatographic applications. Type 316 is most commonly used for HPLC because of its superior chloride ion resistance.

#### **Stainless steel, Type 303**

Recommended for GC use and general purpose connections, combining excellent machining characteristics with good resistance to corrosion and high temperature oxidation. Susceptible to attack by chlorides, iodides, and bromides.

#### **Stainless steel, gold-plated**

Improved inertness and high-integrity sealing for applications such as ultra pure gas analysis.

#### **Electroformed nickel (EFNI)**

We electroplate pure nickel over a diamond drawn mandrel in a continuous process, then carefully separate and remove the mandrel from the tubing. The result is an extremely inert and smooth interior surface (1–2 microinch finish). It is widely used for transfer lines, since it minimizes the potential for carryover or cross contamination often found with mill-drawn Nickel 200, due to its rough interior surface. Unlike glass- or silica-lined stainless, EFNI can easily accept tight bends and cutting without heating, and does not release damaging glass fragments or silica particles.

Electroformed nickel has more in common with fused silica than drawn nickel tubing in terms of surface inertness and smoothness.

#### **Hastelloy C® series**

This is the material most often recommended for corrosion resistance – it works when nothing else will. This versatile nickel-chromium molybdenum alloy has excellent resistance to most acids, including strong oxidizers such as ferric and cupric chlorides; nitric, formic and acetic acids; wet chlorine; sea water and brine solutions; and mixtures containing nitric acid or oxidizing acids with chloride ions. VICI uses only HC-22 for fittings and valve stators, rather than the older and less corrosion resistant HC-276.

The best choice for most special applications where HPLC grade stainless cannot be used, Hastelloy C has excellent resistance to pitting, stress corrosion cracking, and oxidizing atmospheres up to temperatures well beyond any other standard components of the chromatographic system.

#### **Inconel 600**

One of the few metals which can be used with hot, strong solutions of magnesium chloride. Good for most severely corrosive environments at elevated temperatures. Resistant to sulfuric and hydrofluoric acid, and to all concentrations of phosphoric acid at room temperature. Poor resistance to nitric acid.

#### **Monel 400**

High resistance to hydrochloric, hydrofluoric, and sulfuric acid under reducing conditions. Attacked by oxidizing acid salts and hypochlorites. High resistance to chlorinated solvents and nearly all alkalis.

#### **Nickel 200**

Excellent resistance to caustics, high temperature halogens and hydrogen halides, and salts other than oxidizing halides. Good resistance to caustic soda and other alkalis except ammonium hydroxide.

The industry standard nickel alloy tubing, containing trace amounts of copper, carbon, silicon, and other elements which impart certain mechanical characteristics. Like our 316 stainless, this tubing is cold drawn to close ID and OD specifications, and is suitable for many applications where a relatively inert and low cost nickel is required. While more inert than 316 SS in most applications, it is still absorptive and has a relatively rough interior. Use electroformed nickel tubing for applications requiring a high level of inertness or finish.

#### **Nitronic 50**

Good resistance to chlorides, sulfuric acid, and sea water. Resistant to sulfur gases such as hydrogen sulfide and sulfur dioxide.

#### **Nitronic 60**

Chemical resistance is similar to Type 316 stainless, but its resistance to galling and oxidation make it superior to Type 316 or 303 in the majority of applications. This is the standard material in Valco and Cheminert metal valve lines.



**MATERIAL AVAILABILITY  
BY PRODUCT LINE**

Note: This list represents materials available in at least some of the products in the lines listed. Not all products in a line are available in all the materials mentioned.

**Fittings**
**Cheminert**

CTFE  
PEEK  
PFA  
Polypropylene  
Stainless steel, Type 316

**Valco**

300 series stainless steel  
PEEK

**Ferrules**
**Valco**

CTFE  
FEP  
Hastelloy C  
Nickel  
PFA  
Polyimide, graphite  
Polyimide, Valcon  
Polyimide, virgin  
PTFE, virgin  
PTFE, glass-filled  
Stainless, Type 303  
Stainless, Type 316  
Stainless, gold-plated  
Titanium  
Brass

**Cheminert**

PEEK

**Tubing**

Electroformed nickel (EFNI)  
ETFE  
FEP  
Hastelloy C  
Nickel 200  
PEEK  
PTFE  
Stainless steel, Type 316  
Titanium

**Valve rotors**
**Cheminert**

Valcon E  
Valcon E2  
Valcon E3  
Valcon H  
Valcon M  
Valcon P  
Valcon T  
Valcon TF

**Diaphragm**

A specialized polyimide

**Valco**

Valcon E  
Valcon E2  
Valcon H  
Valcon M  
Valcon P  
Valcon R  
Valcon T  
Valcon TF

**Valve**
**stators/ bodies**
**Cheminert**

CTFE  
Hastelloy C  
Nitronic 60 stainless  
PAEK  
PPS  
PVDF  
Stainless steel, Type 316  
Titanium

**Diaphragm**

Hastelloy C  
Nitronic 60  
Stainless steel, Type 316

**Valco**

Hastelloy C  
Inconel 600  
Monel 400  
Nickel 200  
Nitronic 50  
Nitronic 60  
Stainless steel, Type 316  
Titanium  
Zirconium

**Titanium**

Although it is more difficult to machine than common alloys containing aluminum and vanadium, Valco uses Grade 2 pure titanium in order to avoid possible contamination of the sample stream with these metals.

Good for organic and inorganic salts except aluminum and calcium chlorides, and all alkalis except boiling concentrated potassium hydroxide. Good with dilute, low temperature formic, lactic, sulfuric, hydrochloric, and phosphoric acids, but rapidly attacked by hydrofluoric acid. Good with dilute nitric acid at low temperatures; corrodes at high concentrations and temperatures. Can ignite with fuming nitric acid. Attacked by oxalic acid, concentrated phosphoric acid, hot trichloroacetic acid, and zinc chloride.

Due to the nature of this metal, valves made of titanium typically have a shorter lifetime than HPLC grade stainless steel or Hastelloy C-22.

**Zirconium**

Excellent resistance to hydrochloric acid, good with hot sulfuric acid at concentrations up to 70% and boiling nitric acid at up to 90%. Attacked by hydrofluoric acid.

**Brass**

Used where a soft metal ferrule is desirable but no corrosive materials are present. Although Valco brass ferrules work as replacements in inexpensive commercial brass fittings, they are generally not recommended for chromatography applications.

## GENERAL REFERENCE

### CTFE

Chlorotrifluoroethylene, is the generic name for the material produced as Kel-F® and as Aclar®. It is very resistant to all chemicals except THF and some halogenated solvents, and is resistant to all inorganic corrosive liquids, including oxidizing acids. CTFE can be used at temperatures up to 100°C. Swells in ketones.

### ETFE

Ethyltrifluoroethylene is the generic name for the material such as Tefzel®. A fluoropolymer used for sealing surfaces, it is resistant to most chemical attack; however, some chlorinated chemicals will cause a physical swelling of ETFE tubing.

### FEP

Fluorinated ethylene propylene is another member of the fluorocarbon family with similar chemical properties. It is generally more rigid than PTFE, with somewhat increased tensile strength. It is typically more transparent than PTFE, slightly less porous, and less permeable to oxygen. FEP is not as subject to compressive creep at room temperature as PTFE, and because of its slightly higher coefficient of friction is easier to retain in a compression fitting.

### PAEK

Polyaryletherketone is the generic name for the family of polyketone compounds. (See PEEK.) PAEK includes PEK, PEEK, PEKK, and PEKEKK, which differ in physical properties and, to a lesser degree, in inertness.

VICI utilizes a range of proprietary PAEK-based composites (PEEK and others) for valve and fitting components. These composites resist all common HPLC solvents and dilute acids and bases. However, concentrated or prolonged use of halogenated solvents may cause the polymer to swell. Avoid concentrated sulfuric or nitric acids (over 10%).

### PEEK

Considered relatively inert and biocompatible, polyetheretherketone tubing can withstand temperatures up to 100°C. Under the right circumstances, .005" – .020" ID tubing can be used up to 5000 psi for a limited time, and 0.030" to 3000 psi. Larger IDs are typically good to 500 psi. These limits are substantially reduced at elevated temperatures and in contact with some solvents or acids.

Its mechanical properties allow PEEK to replace stainless in many situations and in some environments where stainless would be too reactive. However, PEEK can be somewhat absorptive of solvents and analytes, notably methylene chloride, DMSO, THF, and high concentrations of sulfuric and nitric acid.

### PEEK, glass-filled

This form of PEEK has better mechanical properties than natural PEEK, and performs extremely well in products such as ferrules.

### PFA

Perfluoroalkoxy is a fluorocarbon with chemical and mechanical properties similar to FEP. More rigid than either PTFE or FEP. Commonly used for injection molded parts.

### PPS

Polyphenylene sulphide is the generic name for the material produced as Fortron®, Ryton®, and others. It is very resistant to all solvents, acids, and bases.

### PTFE

Polytetrafluoroethylene is the generic name for the class of materials such as Teflon®. It offers superior chemical resistance but is limited in pressure and temperature capabilities. Because it's so easy to handle, it is often used in low pressure situations where stainless steel might cause adsorption. PTFE tubing is relatively porous, and compounds of low molecular weight can diffuse through the tubing wall.

### PTFE, glass-filled

This form of PTFE is nearly as inert as the virgin but is much more mechanically stable.

### Polyimide, graphite

A graphite-filled polyimide. Due to its brittle nature, it is usually used only for reducing ferrules.

### Polyimide, virgin

Not recommended for general use due to its tendency to be sticky and brittle at high temperatures. Often used as a high temperature electrical insulator.

### Polyimide, Valcon

A high temperature (350°) graphite-reinforced polyimide composite used for all FS and FSR ferrules (fused silica adapters) and many standard ferrules. Valcon polyimide is specially prepared by a process known as Hot Isostatic Pressing (HIP) prior to being machined into individual adapters. This two step process yields a fused silica adapter with high temperature stability far exceeding that of parts produced by molding. It cannot be used with steam or with bases such as strong alkali and aqueous ammonia solutions.

### Polypropylene

Widely used polymer for non-wetted parts. Attacked by strong oxidizers, aromatic and chlorinated hydrocarbons.

### PVDF

PVDF, polyvinylidene fluoride, has excellent resistance to most mineral and organic acids, aliphatic and aromatic hydrocarbons, and halogenated solvents. Poor resistance to acetone, MEK, THF, and potassium and sodium hydroxide. Often supplied as Kynar®.

A variety of polymeric composites have been developed to meet a variety of customer requirements for rotors, since no single material will perform satisfactorily in all situations. This brief summary of each polymer's particular features and potential drawbacks is provided to allow the user to make a more informed valve selection. Consult our technical specialists for any additional questions. *VICI polymer composites are proprietary formulations: only the generic compound class can be discussed.*

#### Valcon E

A polyaryletherketone/PTFE composite, the E material receives wide GC use in what had previously been a problematic gap between the optimum temperature ranges of P and T, and in HPLC applications where the temperature requirement is higher than what can be handled by the H material and where a lower pressure limit can be tolerated. (Standard specs are 400 psi at 225°C, but higher pressure ratings are possible at reduced temperatures.) However, this polymer cannot be used in prolonged contact with high concentrations of sulfuric and nitric acids, DMSO, THF, or liquid methylene chloride.

#### Valcon E2

A proprietary reinforced TFE composite, Valcon E2 works well at lower pressures and is suitable for temperatures up to 75°C. This material is resistant to most chemicals but should not be used in prolonged contact with high concentrations of sulfuric and nitric acids, DMSO, or liquid methylene chloride.

#### Valcon E3

An engineered polyaryletherketone, this high-strength composite resists all common HPLC solvents and dilute acids and bases. However, concentrated or prolonged use of halogenated solvents may cause the polymer to swell. Avoid concentrated sulfuric or nitric acids (over 10%).

#### Valcon H

This composite, a carbon fiber reinforced, PTFE-lubricated inert engineering polymer, has long been the standard for typical HPLC applications in which pressures are around 5000 psi and temperatures are not more than 75°C. It is not unusual for these valves to be ordered for use at 7000 psi, and less frequently for use at 10,000 psi. However, at that point the lifetime may be shortened by as much as 50%.

Valcon H is the rotor material used in the W and UW series, where no rotor material letter is added (as: C10W or AC6UW).

#### Valcon M

This material, basically a hydrocarbon in structure, is the most impermeable to light gases of all the rotor materials currently available, with wide acceptance in low-temperature (50°C maximum) trace gas applications. Avoid use with aromatic hydrocarbons.

#### Valcon P

This composite, the majority of which is PTFE and carbon, was the standard choice for most GC applications before the development of Valcon E. (Standard specs are 400 psi at 175°C.) Routinely used at 1000 psi, 75°C, it can also be used at temperatures approaching 200°C with decreased sealing tension; however, at that point Valcon E is probably a better choice from a lifetime standpoint. Valcon E can replace P in most applications.

#### Valcon R

While rarely used today, Valcon R (a PTFE composite) still finds use in low temperature/pressure situations which require its nearly universal chemical inertness. Of the chemicals encountered in commercial practice, only molten sodium and fluorine at elevated temperatures and pressures produce any detrimental effects. Its most severe limitation is that it cannot go over 75°C, even at only 400 psi.

#### Valcon T

This polyimide/PTFE/carbon composite has been used successfully for many years and still cannot be surpassed when applications demand operating temperatures in the 250°C – 350°C range. (Standard specs for most series are 300 psi at 330°C.) However, at temperatures below 150°C there is a tendency for the seal material to stick to the valve body, making the valve difficult to turn and causing the rotor to crack in extreme cases. Literature provided at the time of purchase contains instructions for reconditioning the material if this condition should arise. The T material is susceptible to attack from steam, ammonia, hydrazines (anhydrous liquids or vapor), primary and secondary amines, and solutions having a pH of 10 or more. Chemical reagents which act as powerful oxidizing agents (nitric acid, nitrogen tetroxide, etc.) must also be avoided. Valcon T can be used in "hot" GPC/SEC applications with O-dichlorobenzene as a solvent.

#### Valcon TF

This is the series designation for a valve with a virgin PTFE seal. Its mechanical characteristics are poor compared to the other choices, but occasionally its use is dictated by the presence of oxidizing agents too strong even for the R material.

#### Valcon X

This designation indicates a proprietary polyimide blend with chemical properties similar to Valcon T, but with higher compressive strength.

#### NOTES

The specifications in the discussions on this page are for two position valves.

Multiposition selectors generally have lower pressure and temperature limits due to the more complex seal design.

Actual specifications for each valve series are shown on the appropriate pages throughout the valve sections of the catalog. If a valve is to be used at a pressure higher than the given standard, please contact the factory for ordering information.

## GENERAL REFERENCE

## A

**Adapter:** a type of fitting which provides a method of joining two components of differing thread types or systems.

**Analytical column:** a long narrow tube packed or coated with one of many available chemically diverse compounds that can separate the components in a sample according to their boiling point, polarity, molecular size, or combination thereof. A column of some kind is used with most chromatographic techniques.


## B

**Backflush:** the use of valving to reverse the flow through a column in order to “backflush” or purge heavier components from the column.

**Biocompatibility:** defines the materials used in a system (i.e. fittings, tubing, and valves) that do not change the bioactivity of the biological substances that come into contact with the surface of these materials. Note that in chromatographic systems, the tubing and column contribute over 99% of the surface area and the valves and fittings are insignificant.

**Bore:** the diameter of the minimum orifice through the fitting; see **capillary bore**, **through-type bore**, and **large bore**.

**Bulkhead fitting:** a type of fitting in which the fitting body is inserted through an instrument panel or mounting bracket, to which it is affixed with a mounting nut. The Valco fitting body is uniquely undercut so that it “bites” into the panel when the mounting nut is tightened, eliminating the need for a lock washer.

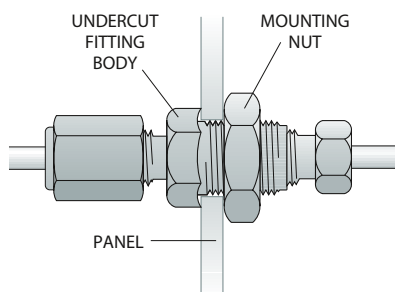


**Butt connection:** a type of connection in which the two tube ends are directly and squarely in contact, usually effected with a through-type union. Typically used with fused silica connections, or small bore metal tubing.

## C

**Cap:** a cap is used to dead-end a piece of tubing which has a nut and ferrule installed.

**Capillary bore:** the smallest available standard orifice in a given fitting design (usually 0.25 mm). Typically denoted by suffix “C” in the product number.

**Closemount hardware:** the mounting components providing the most direct, shortest attachment of valve to actuator.

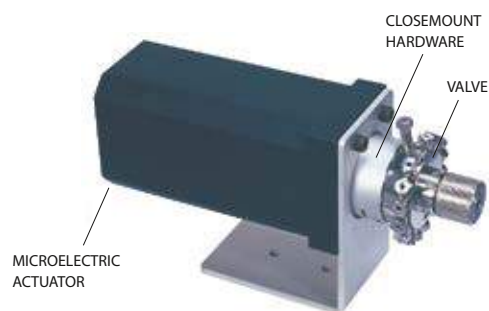

**Compression fitting:** a style of fitting in which a threaded nut compresses a tapered ferrule onto tubing as the nut is tightened. Valco metal ferrules cut a ring into the tubing wall while polymer types rely on surface compression to form a seal.

**Connecting volume:** the volume between two or more connections. This may be cleanly swept, thus not contributing to peak distortion, or may be “dead volume” such as that found in fittings with larger bores than the connecting tubing.

**Cross:** a type of distribution fitting which connects four pieces of tubing, arranging them in the pattern of a cross.

## D


**Dead volume:**

(drawing at right)  
any volume which a component introduces to a system that is not cleanly swept and relies on diffusion to clear the space. See **Connecting volume**.

**Detail:** see **Fitting detail**.

**Distribution fitting:**

a generic term for tees, crosses, and manifolds, which provide multiple access points to “distribute” a gas or liquid through a system. **CAUTION!** Using a distribution fitting in reverse to coalesce multiple streams may create dead volume. Special manifolds are available for this application.

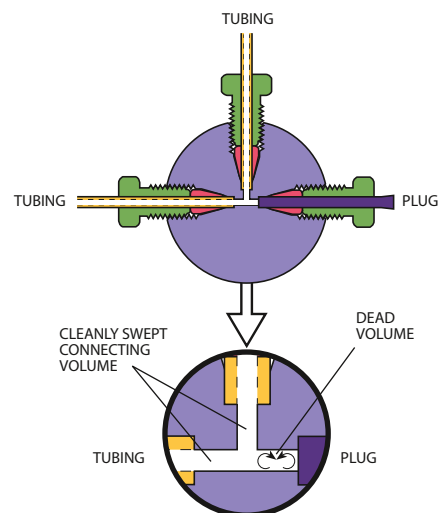

## E

**External fitting:** a type of compression fitting in which the fitting body has male threads; an external *nut* has female threads.



## F

**FIA:** Flow Injection Analysis. A simple and versatile analytical technique for automating wet chemical analyses based on the manipulation of a sample zone formed from the injection of the sample into a continuous stream of fluid used as a carrier.

**Ferrule:** one of the components of a compression fitting; the conical piece of metal or plastic that compresses onto the tube as it is forced into a tapered seat. Valco metal ferrules are unique in that they attach to and seal at the tube by cutting a shallow ring into it, instead of by actually swaging it. This is preferable since it introduces no flow restriction.

**Filter:** a type of union or reducing union which traps the particulates in a stream. The filtering element is typically a mesh screen or sintered frit.

**Fitting detail:** one of the components of a compression fitting; if the tube, nut, and ferrule comprise the male part of the fitting, the fitting detail is the female part. It includes the threads for the nut, the tapered ferrule seat, and the pilot.

**Flanged fitting:** a type of fitting used with fluoropolymer tubing (PTFE, FEP) in which a flange is made at the tube end. Connections are made at the flange either by compressing the flange into a flat detail (typically 1/4-28 threaded) or by butting two flanges together. A special flanging tool forms the flanges.

**Flangeless fitting:** similar in application to the flanged fitting, but the flange is not required. A ferrule system is used which grips/compresses the tube. This fitting type can be used with virtually any polymeric tubing since the tube end does not have to be formed, but simply square cut. Typically used in 1/4-28 threaded fittings, it is usually interchangeable with flanged fittings.

**Frit:** a filter element typically made of stainless, Hastelloy, Titanium, or polymers, usually 0.75 mm or 1 mm thick. Frits may provide better filtration than screens, but because they are thicker there is greater mixing potential, and they typically result in increased pressure drop.

## G

**GC:** Gas Chromatography. An analytical method incorporating an injection system, analytical column, controlled temperature zone, and detector. An inert carrier gas moves the sample through the column, which separates the sample components into discrete bands which are measured as they pass through the detector.

**Guard column:** a column used in series between the injector and analytical column to prevent certain types of components from entering the analytical column.

## H

**HPLC:** High Performance Liquid Chromatography. An analytical system consisting of an injector, pump, analytical column, and detector. Using a liquid mobile phase, the sample is pumped through the column, where it is separated into discrete sample component bands which are detected and measured as the bands elute from the column.

## I

**ID:** internal diameter.

**Inert:** technically, unreactive with other substances; however, in the instrumentation field, "inert" is a relative term. Often polymers are termed inert but are soluble in some fluids and can react with some compounds.

**Internal fitting:** a type of compression fitting in which the fitting body has female threads; an internal *nut* has male threads.

## L



**LC:** Liquid Chromatography. Any of a variety of low to medium pressure techniques which use a liquid mobile phase as the carrier to move sample. Similar to HPLC.

**Large bore:** a bore that is larger than the standard for a given fitting; a fitting ordered with a large bore will have a larger flow orifice than the standard or capillary bore fitting of the same design. Denoted by suffix "L" in the product number.

**Luer adapter:** an adapter that connects a tapered luer fitting (square nib) of a syringe to a tube or tube fitting.

## GENERAL REFERENCE

## M

**Make up:** the point at which a ferrule, nut, and tube are assembled in the fashion which will effect a leak-free seal. In most compression fittings, that is accomplished by compressing the tube with the small end of the ferrule. With Valco metal ferrules, the ferrule usually makes up on the tube by cutting a shallow ring in it.

**Manifold:** a type of distribution fitting in which a single source is directed to multiple outlets, or vice versa. *CAUTION!* Using a common distribution fitting in reverse to merge multiple streams may create dead volume. Special manifolds are available for this application.

**Microbore column:** a liquid chromatography column of narrow bore (typically 2 mm or less) for improved resolution.

## N

**Nanovolume®:** a trademark registered to Valco Instruments Co. Inc, applied to our nanobore components with bore sizes less than 250  $\mu\text{m}$  (0.010").

**NPT:** National Pipe Thread; a standardized tapered pipe fitting. See **pipe thread**.


**Nut:** the tensioning component of a compression fitting. As the threaded nut is tightened into the fitting detail, it pushes the ferrule forward into the tapered ferrule seat, causing it to make up on the tube.

## O

**OD:** outside diameter.

## P

**Pilot:** the tubing which extends beyond the ferrule in a made-up fitting, or the integral portion of a ZRF internal reducing ferrule which extends beyond the ferrule. See also **Pilot depth**.

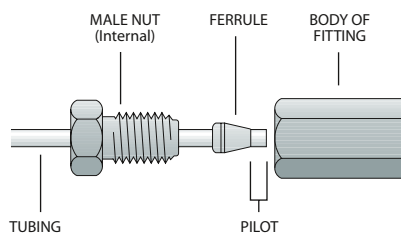

**Pilot depth:** the length of the tubing diameter cavity beyond the tapered ferrule seat within a fitting detail. Valco fitting pilot depths are tightly controlled to facilitate the interchangeability of components without the risk of leaks or dead volume. The one exception is Cheminert high pressure valves with polymeric stators which have a longer pilot depth.

**Pipe thread:** the external or internal threads of a fitting designed to effect a metal-to-metal seal on the conical thread faces. This type of fitting does not "bottom out" in the detail. Typically used with PTFE tape or other compound to lubricate the threads; however, since the diffusion rate of air components through the PTFE tape is considerable, pipe fittings should not be used in systems where leakage rates are critical.


**Port:** the connection, orifice, seal, or septum, etc., through which sample may be added (injected) or withdrawn.

## R

**Reducing ferrule:** a ferrule which allows a smaller tube to be used in a fitting detail designed for a larger tube. Caution should be taken if standard reducing ferrules (RF) without integral pilots are used, since dead volume may be created in the fitting pilot depth.

**Reducing union:** a fitting which joins two tubes of different ODs. The bore of the fitting should typically match the ID of the smaller tube.

**Rotor:** the internal rotating part of a Valco valve. It contains the engraved slots which connect the ports on the stator or cap.

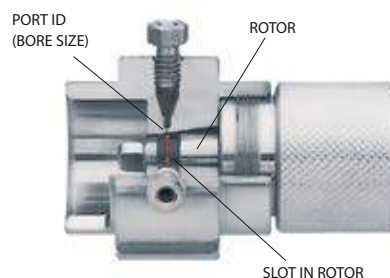

Rotor visible in cutaway valve

## S

**SFE:** Supercritical Fluid Extraction. An extraction technique using a fluid in its supercritical state as the extraction medium. Some liquids and mixtures maintained above a critical temperature and pressure exhibit properties of both the liquid and gas phases of the element. These are defined as supercritical.  $\text{CO}_2$  is a common supercritical fluid. Extreme caution must be used with supercritical  $\text{CO}_2$ , since uncontrolled expansion (leaks) can be very hazardous due to the substantial stored energy.

**SFC:** Supercritical Fluid Chromatography. An analytical technique using a supercritical fluid (see **SFE**) as the mobile phase/carrier.

**Screen:** a replaceable filter element generally made of Type 316 stainless steel, usually 0.003" thick. Screens clog less frequently than frits, and because they are thinner there is less mixing; however, they are less effective filters.

**Sideload:** any force on the valve rotor other than the proper rotational force along the axis of the rotor, often resulting in leakage or increased wear. It is typically caused by actuation misalignment, over-rotation, or improper mounting of the valve.

**Standard bore:** a bore which was chosen as the standard for a particular fitting, typically based on the most common tubing ID used with that fitting.



**Standoff:** an extension between a valve and actuator which allows the valve to be installed in a different temperature zone than the actuator. Standoffs come in several different lengths.

**Stator:** the stationary component of a valve. Typically, it contains the fittings as well as one of the fluid sealing surfaces. In Valco valves, the stator is called the valve body.

## T

**Tee:** a type of distribution fitting which connects three pieces of tubing, arranging them in the pattern of a “T”.

**Through-type bore:** a bore which is slightly larger than the OD of the tubing which is used with the given fitting. A union with a through-type bore allows the tube ends to butt directly together, or for one tube to run completely through the fitting. Denoted by suffix “T” in the product number. In order to assure correct pilot lengths, we recommend that ferrules be made up on the tubing in a standard union.

## U

**Union:** a fitting for connecting two pieces of tubing of the same OD.

**Unswep volume:** the volume of any portion of a fitting which is in the flowpath but which is a different diameter than the primary flow orifice through the tubing/fitting assembly, or any area not directly swept by the fluid flow. This can also be known as “dead volume” if it is very poorly swept.

## W


**Wetted surfaces:** the surfaces which are contacted by the sample stream.

## Y

**Y:** a type of distribution fitting which connects three pieces of tubing, arranging them in the pattern of a “Y”. Occasionally referred to as a “wye”.

## Z

**Zero dead volume (ZDV):** describes a connection which does not add volume to the system beyond what an extension of tubing would in its place.

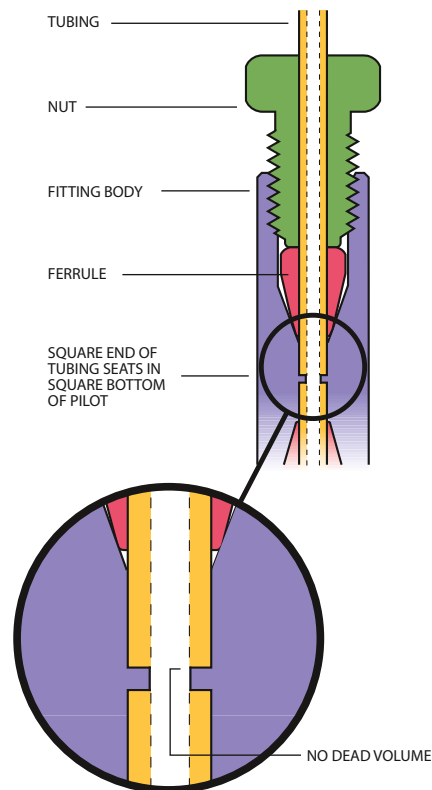

**Zero volume:** while often used interchangeably with zero dead volume, it ideally describes a fitting design in which there is no internal volume, such as a through-type union designed to butt-fit two pieces of tubing.

**GENERAL REFERENCE**

**PRESSURE CONVERSIONS**

psi	KPa	BAR	Atm	psi	KPa	BAR	Atm
1	6.8948	0.06895	0.06805	800	5515.84	55.16	54.44
10	68.948	0.6895	0.6805	825	5688.21	56.88375	56.14125
20	137.896	1.379	1.361	850	5860.58	58.6075	57.8425
30	206.844	2.0685	2.0415	875	6032.95	60.33125	59.54375
40	275.792	2.758	2.722	900	6205.32	62.055	61.245
50	344.74	3.4475	3.4025	925	6377.69	63.77875	62.94625
60	413.688	4.137	4.083	950	6550.06	65.5025	64.6475
70	482.636	4.8265	4.7635	975	6722.43	67.22625	66.34875
80	551.584	5.516	5.444	1000	6894.8	68.95	68.05
90	620.532	6.2055	6.1245	1100	7584.28	75.845	74.855
100	689.48	6.895	6.805	1200	8273.76	82.74	81.66
125	861.85	8.61875	8.50625	1300	8963.24	89.635	88.465
150	1034.22	10.3425	10.2075	1400	9652.72	96.53	95.27
175	1206.59	12.06625	11.90875	1500	10342.2	103.425	102.075
200	1378.96	13.79	13.61	1600	11031.68	110.32	108.88
225	1551.33	15.51375	15.31125	1700	11721.16	117.215	115.685
250	1723.7	17.2375	17.0125	1800	12410.64	124.11	122.49
275	1896.07	18.96125	18.71375	1900	13100.12	131.005	129.295
300	2068.44	20.685	20.415	2000	13789.6	137.9	136.1
325	2240.81	22.40875	22.11625	2500	17237	172.375	170.125
350	2413.18	24.1325	23.8175	3000	20684.4	206.85	204.15
375	2585.55	25.85625	25.51875	3500	24131.8	241.325	238.175
400	2757.92	27.58	27.22	4000	27579.2	275.8	272.2
425	2930.29	29.30375	28.92125	4500	31026.6	310.275	306.225
450	3102.66	31.0275	30.6225	5000	34474	344.75	340.25
475	3275.03	32.75125	32.32375	5500	37921.4	379.225	374.275
500	3447.4	34.475	34.025	6000	41368.8	413.7	408.3
525	3619.77	36.19875	35.72625	6500	44816.2	448.175	442.325
550	3792.14	37.9225	37.4275	7000	48263.6	482.65	476.35
575	3964.51	39.64625	39.12875	7500	51711	517.125	510.375
600	4136.88	41.37	40.83	8000	55158.4	551.6	544.4
625	4309.25	43.09375	42.53125	8500	58605.8	586.075	578.425
650	4481.62	44.8175	44.2325	9000	62053.2	620.55	612.45
675	4653.99	46.54125	45.93375	9500	65500.6	655.025	646.475
700	4826.36	48.265	47.635	10,000	68947.6	689.48	680.46
725	4998.73	49.98875	49.33625	15,000	103,421.4	1,034.21	1,020.69
750	5171.1	51.7125	51.0375	20,000	137,895.1	1,378.95	1,360.9
775	5343.47	53.43625	52.73875	40,000	275,790.3	2,757.9	2,721.84

**LENGTH CONVERSIONS**

mm	inches	inches	mm
0.12	.005"		
0.15	.006"		
0.25	.010"		
0.40	.016"		
0.50	.020"		
0.75	.030"		
1.0	.040"		
1.5	.060"		
2.0	.080"		
4.6	.180"		
6.0	.236"		
6.4	.253"		
7.0	.276"		
10.0	.400"		
1/32"	0.8		
1/16"	1.6		
1/8"	3.2		
1/4"	6.4		
3/8"	9.5		
1/2"	12.7		
1"	25.4		

**TEMPERATURE CONVERSIONS**

°C	°F	°C	°F	°C	°F	°C	°F	°C	°F	°C	°F	°C	°F
-40	-40	35	95	110	230	185	365	260	500	335	635	650	1202
-35	-31	40	104	115	239	190	374	265	509	340	644	675	1247
-30	-22	45	113	120	248	195	383	270	518	345	653	700	1292
-25	-13	50	122	125	257	200	392	275	527	350	662	725	1337
-20	-4	55	131	130	266	205	401	280	536	375	707	750	1382
-15	5	60	140	135	275	210	410	285	545	400	752	775	1427
-10	14	65	149	140	284	215	419	290	554	425	797	800	1472
-5	23	70	158	145	293	220	428	295	563	450	842	825	1517
0	32	75	167	150	302	225	437	300	572	475	887	850	1562
5	41	80	176	155	311	230	446	305	581	500	932	875	1607
10	50	85	185	160	320	235	455	310	590	525	977	900	1652
15	59	90	194	165	329	240	464	315	599	550	1022	925	1697
20	68	95	203	170	338	245	473	320	608	575	1067	950	1742
25	77	100	212	175	347	250	482	325	617	600	1112	975	1787
30	86	105	221	180	356	255	491	330	626	625	1157	1000	1832



**GENERAL REFERENCE**

**REGULATIONS**



**REACH**



As a worldwide supplier of products for the analytical instrument market, we work hard to make sure those products comply with regulatory requirements around the world. All machined products (valves, fittings, etc.) are fully RoHS/REACH/WEEE\* compliant. Most of the electrical products we manufacture are also CE tested and certified. Only a few legacy products are not CE certified.

Following is a list of items in this catalog which are **not** CE and/or RoHS compliant:

Cheminert® flanging tools .....	page 70
Cheminert starter kits .....	70
Digital valve interface	
DVI.....	199
DVI-220 .....	199
Diluter/dispenser, M series .....	82
Dynacalibrator® Model 120 .....	230
G-calibrators (all) .....	233
Heated valve enclosures (all) .....	201
Heated column enclosures (all) .....	203
Heater assemblies and cartridges (all) .....	202
Instrumentation temperature controller	
ITC10399 .....	203
ITC10399-200 .....	203

- \* CE      Conformité Européene (European Conformity)
- REACH    Registration, Evaluation, Authorization, and Restriction of Chemical Substances
- RoHS     Restriction of Hazardous Substances Directive
- WEEE     Waste Electrical and Electronic Equipment Directive

**PATENTS**

Among important US patents held by VICI are the following. Others are pending and may have been granted by the time of publication.

6,575,501	Tube sealing bushing (collapsible bushing)
6,247,731	Nut w/ controlled radius
6,511,528	Purification of CO <sub>2</sub>
6,099,619	
5,858,068	
6,074,459	Ultra pure gas process
6,193,213	XL valves
6,030,436	Permeation tube
6,202,698	Diaphragm valve
5,153,519	Pulsed discharge detectors
5,317,271	
5,394,090	
5,394,091	
5,394,092	
5,541,519	
5,532,599	
5,528,150	
5,594,346	
5,767,683	
5,858,068	
6,133,740	
6,842,008	
6,933,771	
7,091,044	
7,507,586	
7,601,543	
5,329,966	Calibrated flow controllers
4,064,908	Combo valves
7,316,777	No-twist one-piece fitting
7,442,902	Adaptive temperature controller

**TRADEMARKS**

Cheminert	Valco Instruments Co. Inc. and VICI AG International
Condyne	VICI Metronics Inc.
Delrin	E.I. duPont de Nemours
Dynacal	VICI Metronics Inc.
Dynacalibrator	VICI Metronics Inc.
Fortron	Fortron Industries Corp.
Hamilton	Hamilton Company
Hastelloy C	Haynes International Inc.
HayeSep	Hayes Separations, Inc.
IBM	International Business Machines
Inconel 600	Huntington Alloys, Inc.
Kalrez	DuPont Dow Elastomers
Kel-F	3M Company
Kynar	Elf Atochem North America Inc.
Metronics	VICI Metronics Inc.
Micro-Flo	Valco Instruments Co. Inc.
Mininert	Valco Instruments Co. Inc.
Monel	Inco Alloys Intl Inc.
Nanovolume	Valco Instruments Co. Inc.
Nickel 200	Inco Alloys Intl Inc
Nitronic	AK Steel Corporation
Parker	Parker Hannifin Co.
PEEK	Victrex Manufacturing Ltd.
Perifit	Valco Instruments Co. Inc.
Pressure-Flo	Valco Instruments Co. Inc.
Pressure-Lok	Valco Instruments Co. Inc.
Ryton	Phillips Petroleum Co.
Swagelok	Crawford Fitting Company
Teflon	E.I. duPont de Nemours
Tefzel	E.I. duPont de Nemours
Tygon	Saint-Gobain Performance Plastics
Valco	Valco Instruments Co. Inc. and VICI AG International
ValcoBOND	Valco Instruments Co. Inc.
ValcoPLOT	Valco Instruments Co. Inc.
Vespel	E.I. duPont de Nemours
Viton	DuPont Performance Elastomers
VICI	Valco Instruments Co. Inc. and VICI AG International
VICI Jour	Valco Instruments Co. Inc. and VICI AG International
Waters	Waters Associates

GENERAL REFERENCE



**Cheminert valve** product numbers all begin with the valve model (C1, C22, C25Z, C72MU, etc.) and a hyphen. Following the valve model are four numbers – as shown at right, the position of each number determines the category of the specification; the number indicates the actual spec. The final letters

indicate actuation. Internal sample injectors also include the sample size. (Keep in mind that some combinations are not possible, so check with sales for your actual requirements.)

**NOTE!**  
This chart is for decoding existing product numbers, *not* for inventing new ones. Some options can not work with certain valve types and designs!

VALVE TYPE	
<b>1. Required.</b>	
<p><b>UHPLC injectors</b></p> <p>C72MH 10k psi Nanovolume® injector, 360 µm fittings</p> <p>C72MX 15k psi Nanovolume® injector, 360 µm fittings</p> <p>C72MU 20k psi Nanovolume® injector, 360 µm fittings</p> <p>C72NH 10k psi Nanovolume® injector, 1/32" fittings</p> <p>C72NX 15k psi Nanovolume® injector, 1/32" fittings</p> <p>C72NU 20k psi Nanovolume® injector, 1/32" fittings</p> <p>C74NX 15 psi Nanovolume® internal sample injector, 1/32" fittings</p> <p>C72H 10k psi Microbore injector</p> <p>C72X 15k psi Microbore injector</p> <p>C72U 20k psi Microbore injector</p> <p>C74H 10k psi Internal sample injector</p> <p>C74X 15k psi Internal sample injector</p> <p><b>HPLC injectors</b></p> <p>C2N 5k psi Nanovolume® injector, 1/32" fittings</p> <p>C4N 5k psi Nanovolume® internal sample injector, 1/32" fittings</p> <p>C1 5k psi Through-the-handle injector</p> <p>C1CF 5k psi Continuous flow through-the-handle injector</p> <p>C2 5k psi Microbore/analytical valve</p> <p>C4 5k psi Internal sample injector</p> <p>C6 5k psi Continuous flow injector</p> <p><b>OEM injectors</b></p> <p>C2V 5k psi Vertical port injector</p> <p>C3 5k psi Centered port injector</p> <p>C52 5k psi HPLC integrated motor/valve</p> <p>C52V 5k psi HPLC integrated motor/valve with vertical port injector</p> <p>C62Z Low pressure integrated motor/valve, Valco ZDV fittings</p> <p>C62 Low pressure integrated motor/valve, 1/4-28 fittings</p>	<p><b>Low pressure injectors</b></p> <p>C22Z Injector with Valco ZDV fittings</p> <p>C22 Injector with 1/4-28 fittings</p> <p>C24Z Internal sample injector, Valco ZDV fittings</p> <p>C24 Internal sample injector, 1/4-28 fittings</p> <p><b>UHPLC selectors</b></p> <p>C75NH 10k psi Nanovolume® selector, 1/32" fittings</p> <p>C75NX 15k psi Nanovolume® selector, 1/32" fittings</p> <p>C75NU 20k psi Nanovolume® selector, 1/32" fittings</p> <p>C75H 10k psi Microbore selector</p> <p>C75X 15k psi Microbore selector</p> <p>C75U 20k psi Microbore selector</p> <p><b>HPLC selectors</b></p> <p>C5 5k psi Stream selector</p> <p><b>Low pressure selectors</b></p> <p>C25Z Stream selector, Valco ZDV fittings</p> <p>C25 Stream selector, 1/4-28 fittings</p> <p>C25G Stream selector, Cheminert fittings</p> <p>C45 Stream selector, 1/2-20 fittings</p> <p><i>Note: All valves have 1/16" Valco ZDV fittings unless otherwise noted.</i></p> <p><b>OEM selectors</b></p> <p>C55 5k psi HPLC integrated motor/valve selector</p> <p>C65Z Low pressure integrated motor/valve selector, Valco ZDV fittings</p> <p>C65 Low pressure integrated motor/valve selector, 1/4-28 fittings</p>

(HYPHEN)
<b>2. Required.</b>
Place a hyphen after the Cheminert valve type.

Examples:

**C1 - 1 3 4 6**

**C1-1346:**  
C1 through-the-handle injector, 0.25 mm ports, Valcon E rotor, PAEK stator, 6 ports, manual (blank = manual)

**C5 - 2 0 0 6 EMH**

**C5-2006EMH:**  
C5 stream selector, 0.40 mm ports, Valcon H rotor, Nitronic 60 stator, 6 positions, microelectric actuator

**C22Z - 3 1 8 0 EUHA**

**C22Z-3180EUHA:**  
C22Z low pressure injector with ZDV fittings, 0.75 mm ports, Valcon E2 rotor, PPS stator, 10 ports, universal actuator with RS-232 interface

**C74NX - 6 6 7 4 -.01 EH**

**C74NX-6674-.01EH:**  
C74NX UHPLC nanovolume internal sample injector rated at 15,000 psi, 150 micron ports (.006"), Valcon E3 rotor, coated stainless stator, 4 ports, 10 nl internal sample size, microelectric actuator

PORT SIZE	ROTOR MATERIAL	STATOR MATERIAL	PORTS / POSITIONS	INTERNAL SAMPLE SIZE	ACTUATOR
<b>3. Required.</b>	<b>4. Required.</b>	<b>5. Required.</b>	<b>6. Required.</b>	<b>7. Optional.</b> For internal sample inj.	<b>8. Required.</b>
0 0.15 mm (.006") 1 0.25 mm (.010") 2 50 µm (.002")* or 0.40 mm (.016") 3 0.75 mm (.030") 4 100 µm (.004")* or 1.00 mm (.040") 5 1.25 mm (.050") 6 150 µm (.006")* or 1.50 mm (.060") 7 2.00 mm (.080") 8 3.18 mm (.125") 9 4.60 mm (.180")  * for nanovolume valves	0 Valcon H 1 Valcon E2 2 Valcon T 3 Valcon E 4 Valcon M 5 [not used] 6 Valcon E3 7 Valcon TF 8 Valcon P 9 Valcon X	0 Nitronic 60 1 CTFE 2 Hastelloy C ** 3 Titanium ** 4 PAEK 5 Valcon E4 6 [not used] 7 PVDF (low pressure) Coated stainless *** 8 PPS 9 Coated stainless  ** These stator materials are coated when in a C72 / C74 / C75 series valve *** Stator code "7" indicates coated stainless for C72 / C74 / C75 series valves	<b>Ports</b> (Two position)  4 4 6 6 8 8 0 10  <b>Positions</b> (Selectors)  4 4 6 6 8 8 0 10 14 14 20 20 24 24 26 26 28 28	.004 0.004 µl (4 nl) .01 0.01 µl (10 nl) .02 0.02 µl (20 nl) .05 0.05 µl (50 nl) .1 0.1 µl .2 0.2 µl .5 0.5 µl 1 1.0 µl 2 2.0 µl  Put a hyphen (-) before the sample size in the product number.	<b>Air</b> A 0-70°C  <b>Microelectric, two position</b> EQ • highest speed EH • high speed EP • medium torque ED • high torque ET • highest torque  <b>Microelectric, for selectors</b> EMH • high speed EMT • high torque  <b>Universal</b> See chart below.  <b>Manual</b> [blank] (no code letter; shipped with knob)  <b>Driver only</b> D (for use with existing actuator)

**NOTE!**  
This chart is for decoding existing product numbers, **not** for inventing new ones. Some options can not work with certain valve types and designs!

	UNIVERSAL ACTUATORS		
	High speed	Medium speed/ medium torque	High torque
Without interface	EUH	EUD	EUT
With RS-232/485	EUHA	EUDA	EUTA
With USB	EUHB	EUSB	EUTB
With BCD	EUHC	EUDC	EUTC

**GENERAL REFERENCE**



The simplest way to determine a **Valco two position valve** product number is to call our sales department and discuss the features you require. But if you want to decipher an existing product number, refer to this chart and the examples on the facing page for guidelines. (Keep in mind that some combinations are not possible, so check with sales for your actual requirements.)

Every letter and number has a meaning in its proper order and sequence. The shaded columns indicate codes that are required in every product number, and the non-shaded columns offer possibilities of optional features.

**NOTE!**  
This chart is for decoding existing product numbers, *not* for inventing new ones. Some options can not work with certain valve types and designs!

ACTUATOR	STANDOFF ASSEMBLY LENGTH	BORE SIZE	FITTINGS SIZE	INTERNAL SAMPLE INJECTOR
<p><b>1. Required.</b> Valve is shipped with manual knob unless specified otherwise.</p>	<p>2. Optional. Specify if required.</p>	<p>3. Optional. For standard bore, leave blank.</p>	<p><b>4. Required.</b> For 1/8" fittings, leave blank.</p>	<p>5. Optional. Requires 4 ports. Also specify sample size (10.)</p>
<p><b>Air</b> A 0-70°C AT 50-150°C</p> <p><b>Microelectric</b> EH • high speed EP • medium torque ED • high torque ET • highest torque</p> <p><b>Universal</b> See chart below.</p> <p><b>Manual</b> [blank] (no code letter; wshipped with knob)</p> <p><b>Driver only</b> D (for use with existing actuator)</p>	<p>2 2" standoff 3 3" standoff 4 4" standoff 6 6" standoff</p>	<p>[blank] Standard bore L Large bore</p>	<p>N 1/32" C 1/16" [blank] 1/8" VL 1/4"</p>	<p>I</p>

**UNIVERSAL ACTUATORS**

	High speed	Medium speed/ medium torque	High torque
Without interface	EUH	EUD	EUT
With RS-232/485	EUHA	EUDA	EUTA
With USB	EUHB	EUDB	EUTB
With BCD	EUHC	EUDC	EUTC

*Note:* Valco valve product numbers require "-" (hyphen) after the universal actuator code.

Examples:

**4 N 8 W T**

**4N8WT:**

Manual (blank = manual), 4" standoff, standard bore, 1/32" valve, 8 ports, W type, Valcon T rotor, standard Nitronic 60 body

**EH C I 4 W E .1**

**EHCI4WE.1:**

Microelectric actuator, no standoff assembly, standard bore, 1/16" valve, internal sample, 4 ports, W type, Valcon E rotor, standard N60 body, 0.1 µl sample

**A 3 6 UW E HC**

**A36UWEHC:**

Air actuator, 3" standoff, standard bore, 1/8" (blank = 1/8"), 6 ports, UW type, Valcon E rotor, Hastelloy C body material

**EU DC - 2 L 6 UW E**

**EU DC-2L6UWE:**

Universal actuator with BCD interface, 2" standoff, large bore (.067" instead of .030"), 1/8" (blank = 1/8"), 6 ports, UW type, Valcon E rotor, standard Nitronic 60 body

NUMBER OF PORTS	VALVE TYPE	ROTOR MATERIAL	SPECIAL BODY MATERIAL	INTERNAL SAMPLE SIZE
<b>6. Required.</b>	<b>7. Required.</b>	<b>8. Required.</b>	<b>9. Optional.</b> Body material is Nitronic 60 SS unless specified otherwise.	<b>10. Optional.</b> Also specify "I" at Item 5.
3	W	[blank] Valcon H	S6 Type 316 SS	.06 0.06 µl
4	UW	E Valcon E	HC Hastelloy C	.1 0.1 µl
6	MW	E2 Valcon E2	IN Inconel 600	.2 0.2 µl
8		M Valcon M	M4 Monel 400	.5 0.5 µl
10		P Valcon P	NI Nickel 200	1 1.0 µl
12		R Valcon R	N5 Nitronic 50	2 2.0 µl
14		T Valcon T	TI Titanium	Put a hyphen (-) before the sample size in the product number.
		TF Valcon TF		

**TECH TIP**

The letter "C" after number of ports specifies smaller bore than standard.

Example:

DC6CW,  
bore size 0.25 mm

**NOTE!**

This chart is for decoding existing product numbers, **not** for inventing new ones. Some options can not work with certain valve types and designs!

**GENERAL REFERENCE**



Product numbers for **Valco selectors**, like those for two position valves, are composed of letters and numbers which have their meaning based on the position in the product number. The simplest way to determine a Valco valve product number is to call our sales department and discuss the features you require. The chart below and the examples opposite may help decode the product number you have,

or direct you toward all the features you must specify for a selector. (Keep in mind that some combinations are not possible, so check with sales for your actual requirements.)

The shaded columns indicate codes that are required in every product number, and the non-shaded columns offer possibilities of optional features.

**NOTE!**  
This chart is for decoding existing product numbers, *not* for inventing new ones. Some options can not work with certain valve types and designs!

ACTUATOR	STANDOFF ASSEMBLY LENGTH	BORE SIZE	FITTINGS SIZE	FLOWPATH
<p><b>1. Required.</b> Valve is shipped with manual knob unless specified otherwise.</p>	<p><b>2. Optional.</b> Specify if required.</p>	<p><b>3. Optional.</b> For standard bore, leave blank.</p>	<p><b>4. Required.</b> For 1/8" fittings, leave blank.</p>	<p><b>5. Required.</b></p>
<p><b>Air</b> A 0-70°C AH high torque AT 50-150°C</p> <p><b>Microelectric</b> EMH • high speed EMT • high torque</p> <p><b>Universal</b> See chart below.</p> <p><b>Manual</b> [blank] (not recommended)</p> <p><b>Driver only</b> D (for use with existing actuator)</p>	<p>2 2" standoff 3 3" standoff 4 4" standoff 6 6" standoff</p>	<p>[blank] Standard bore L Large bore</p>	<p>C 1/16" [blank] 1/8" VL 1/4"</p>	<p>SD SC SF ST STF</p>

UNIVERSAL ACTUATORS			
	High speed	Medium speed/ medium torque	High torque
Without interface	EUH	EUD	EUT
With RS-232/485	EUHA	EUDA	EUTA
With USB	EUHB	EUDB	EUTB
With BCD	EUHC	EUDC	EUTC

*Note: Valco valve product numbers require "-" (hyphen) after the universal actuator code.*

Examples:

**A 2 VL SC 6 MW E2**

**A2VLS6MWE2:**

Air actuated, 2" standoff, 1/4" valve, SC flowpath, 6 positions, MW type, Valcon E2 rotor, standard Nitronic 60 body

**UMT 4 C SD 4 UW**

**UMT4CSD4UW:**

Modular universal actuator, 4" standoff, 1/16" valve, SD flowpath, 4 positions, UW type, Valcon E (blank = E) rotor, standard N60 body

**EUT- 3 ST 10 MW T HC**

**EUT3ST10MWT HC:**

Universal actuator with no interface, 3" standoff, 1/8" (blank = 1/8") valve, ST flowpath, 10 positions, MW type, Valcon T rotor, Hastelloy C body

NUMBER OF POSITIONS	VALVE TYPE	ROTOR MATERIAL	SPECIAL BODY MATERIAL
6. Required.	7. Required.	8. Required.	9. Optional. Body material is Nitronic 60 SS unless specified otherwise.
4	MW Low pressure	[blank] Valcon E	S6 Type 316 SS
6		E Valcon E	HC Hastelloy C
8	UW high pressure	E2 Valcon E2	IN Inconel 600
10		M Valcon M	M4 Monel 400
12		P Valcon P	NI Nickel 200
16		R Valcon R	N5 Nitronic 50
		T Valcon T	TI Titanium
		TF Valcon TF	

**TECH TIP**

The letter "C" after number of ports specifies smaller bore than standard.

Example:

DCSD6**CM**WE,  
bore size 0.25 mm

**NOTE!**

This chart is for decoding existing product numbers, **not** for inventing new ones. Some options can not work with certain valve types and designs!

# Index by product number

## GENERAL REFERENCE

.2FR.5-5.....	53,60	2FR4HC-10.....	45,53	4C6WT.....	110	A2NI4WE.1.....	104
.5FR.5-5.....	53,60	2FR4TI-10.....	45,53	4C8UWE.....	109	A2NI4WE.2.....	104
.5FR1-10.....	53	2FR6.....	45	4C8UWT.....	111	A2NI4WE.5.....	104
.5FR1HC-10.....	45,53	2FR6HC.....	45	4C8WE.....	108	A2SC10MWE.....	127
.5FR2-10.....	45,53	2FR6TI.....	45	4C8WT.....	110	A2SC12MWE.....	127
.5FR2HC-10.....	53	2FR8.....	45	4N10WE.....	106	A2SC16MWE.....	127
.5FR4-10.....	45,53	2I4UWE.2.....	105	4N10WT.....	107	A2SD10MWE.....	125
.5SR.5-10.....	53	2I4UWE.5.....	105	4N4WE.....	106	A2SD12MWE.....	125
.5SR1-10.....	53	2I4UWE1.....	105	4N4WT.....	107	A2SD16MWE.....	125
.5SR2-10.....	53	2I4UWE2.....	105	4N6WE.....	106	A2SD6MWE.....	125
.5SR4-10.....	53	2L10UW.....	118	4N6WT.....	107	A2SF10MWE.....	129
10FR1-10.....	45,53	2NI4WE.06.....	104	4N8WE.....	106	A2SF12MWE.....	129
10FR2-10.....	45,53	2NI4WE.1.....	104	4N8WT.....	107	A2SF16MWE.....	129
10FR4-10.....	45,53	2NI4WE.2.....	104	4SOA.....	205	A2ST10MWE.....	131
10FR4HC-10.....	45,53	2NI4WE.5.....	104	4SOAMP.....	205	A2ST12MWE.....	131
10SR.5-10.....	53	2RAD.....	204	4SOAMP...CP	.83	A2ST16MWE.....	131
10SR1-10.....	53	2SC10MWE.....	127	4SOUTH.....	205	A2STF10MWE.....	133
10SR2-10.....	53	2SC12MWE.....	127	4SOUTHMP.....	205	A2STF12MWE.....	133
10SR4-10.....	53	2SC16MWE.....	127	4SOWK.....	205	A2STF16MWE.....	133
1FR2-10.....	53	2SC6MWE.....	127	4SOWKMP.....	205	A30.....	197
1FR2HC-10.....	53	2SD10MWE.....	125	4SOWKMP.....	205	A304.....	197
1SR.5-10.....	53	2SD12MWE.....	125	4UW.....	117	A30S.....	197
1SR1-10.....	53	2SD16MWE.....	125	4UWE.....	112	A36.....	197
1SR2-10.....	53	2SD6MWE.....	125	4VL4MWE2.....	112	A364.....	197
1SR4-10.....	53	2SF10MWE.....	129	4VL6MWE2.....	112	A36S.....	197
210UW.....	117	2SF12MWE.....	129	4VL8MWE2.....	112	A4.....	196
2301.....	233	2SF16MWE.....	129	6SOAMP...CP	.83	A410UWE.....	112
2310-10.....	233	2SF6MWE.....	129	6UW.....	117	A410UWT.....	113
2310-20.....	233	2SOA.....	205	6UWE.....	112	A42.....	196
2330-10.....	233	2SOA.....	205	8UW.....	117	A44UWE.....	112
2330-20.....	233	2SOAMP.....	205	8UWE.....	112	A44UWT.....	113
2CI4UWE.2.....	105	2SOAMP...CP	.83	A10.....	196	A45.....	197
2CI4UWE.5.....	105	2SOAMP.....	205	A102.....	196	A454.....	197
2CI4UWE1.....	105	2SOAMP.....	205	A105.....	196	A45S.....	197
2CI4UWE2.....	105	2SOAMP.....	205	A10UW.....	117	A46UWE.....	112
2CI4WE.06.....	104	2SOAMP.....	205	A12.....	196	A46UWT.....	113
2CI4WE.1.....	104	2SOAMP.....	205	A122.....	196	A48UWE.....	112
2CI4WE.2.....	104	2SOAMP...CP	.83	A12S.....	196	A48UWT.....	113
2CI4WE.5.....	104	2SR.5-10.....	53	A16.....	196	A4C10UWE.....	109
2CSC10MWE.....	126	2SR1-10.....	53	A162.....	196	A4C10UWT.....	111
2CSC12MWE.....	126	2SR2-10.....	53	A16S.....	196	A4C10WE.....	108
2CSC16MWE.....	126	2SR4-10.....	53	A2CI4UWE.2.....	105	A4C10WT.....	110
2CSC6MWE.....	126	2ST10MWE.....	131	A2CI4UWE.5.....	105	A4C4UWE.....	109
2CSD10MWE.....	124	2ST12MWE.....	131	A2CI4UWE1.....	105	A4C4UWT.....	111
2CSD12MWE.....	124	2ST16MWE.....	131	A2CI4UWE2.....	105	A4C4WE.....	108
2CSD16MWE.....	124	2ST6MWE.....	131	A2CI4WE.06.....	104	A4C4WT.....	110
2CSD6MWE.....	124	2STF10MWE.....	133	A2CI4WE.1.....	104	A4C6UWE.....	109
2CSF10MWE.....	128	2STF12MWE.....	133	A2CI4WE.2.....	104	A4C6UWT.....	111
2CSF12MWE.....	128	2STF16MWE.....	133	A2CI4WE.5.....	104	A4C6WE.....	108
2CSF16MWE.....	128	2STF6MWE.....	133	A2CSC10MWE.....	126	A4C6WT.....	110
2CSF6MWE.....	128	3SOAMP...CP	.83	A2CSC12MWE.....	126	A4C8UWE.....	109
2CST10MWE.....	130	410UWE.....	112	A2CSC16MWE.....	126	A4C8UWT.....	111
2CST12MWE.....	130	410UWT.....	113	A2CSD10MWE.....	124	A4C8WE.....	108
2CST16MWE.....	130	44UWE.....	112	A2CSD12MWE.....	124	A4C8WT.....	110
2CST6MWE.....	130	44UWT.....	113	A2CSD16MWE.....	124	A4N10WE.....	106
2CSTF10MWE.....	132	46UWE.....	112	A2CSD6MWE.....	124	A4N10WT.....	107
2CSTF12MWE.....	132	46UWT.....	113	A2CSF10MWE.....	128	A4N4WE.....	106
2CSTF16MWE.....	132	48UWE.....	112	A2CSF12MWE.....	128	A4N4WT.....	107
2CSTF6MWE.....	132	48UWT.....	113	A2CSF16MWE.....	128	A4N6WE.....	106
2FR.5-5.....	53,60	4C10UWE.....	109	A2CST10MWE.....	130	A4N6WT.....	107
2FR1-10.....	45,53	4C10UWT.....	111	A2CST12MWE.....	130	A4N8WE.....	106
2FR1HC-10.....	45,53	4C10WE.....	108	A2CST16MWE.....	130	A4N8WT.....	107
2FR1K.....	45	4C10WT.....	110	A2CSTF10MWE.....	132	A4S.....	196
2FR1KHC.....	45	4C4UWE.....	109	A2CSTF12MWE.....	132	A4UW.....	117
2FR1KTI.....	45	4C4UWT.....	111	A2CSTF16MWE.....	132	A4VL4MWE2.....	112
2FR1TI-10.....	45,53	4C4WE.....	108	A2I4UWE.2.....	105	A4VL6MWE2.....	112
2FR2-10.....	45,53	4C4WT.....	110	A2I4UWE.5.....	105	A4VL8MWE2.....	112
2FR2HC-10.....	45,53	4C6UWE.....	109	A2I4UWE1.....	105	A6.....	196
2FR2TI-10.....	45,53	4C6UWT.....	111	A2I4UWE2.....	105	A60.....	197
2FR4-10.....	45,53	4C6WE.....	108	A2NI4WE.06.....	104	A604.....	197



**GENERAL REFERENCE**

A60S .....	197	ASFVO2HT4 .....	213	C-2C38H .....	163	C1-13R6 .....	162
A62 .....	196	ASFVO40K.5 .....	85	C-2C40H .....	163	C1-20R6 .....	165
A6S .....	196	ASFVO40K1 .....	85	C-2C44 .....	163	C1-23R6 .....	165
A6UW .....	117	ASFVO40K360 .....	85	C-2C46 .....	163	C10UW .....	116
A8 .....	196	ASFVOD40K.5 .....	85	C-2C48H .....	163	C10UWE .....	109
A82 .....	196	ASFVOD40K1 .....	85	C-BOT16 .....	81	C10W .....	115
A8S .....	196	ASFVOD40K360 .....	85	C-BOT32 .....	81	C10WE .....	108
A8UW .....	117	ASFVOHT .....	213	C-EN.5FPKB .....	59	C12-310 .....	166
A90 .....	197	ASFVOHT4 .....	213	C-F1.5TI .....	78	C12-314 .....	166
A904 .....	197	ASFVOL .....	213	C-LFP .....	41	C12-316 .....	166
A90S .....	197	ASFVOLHT .....	213	C-LZP1PK .....	64	C12-318 .....	166
AC10UW .....	116	ASFVOLHT4 .....	213	C-MPFT110 .....	79	C15-310 .....	176, 177
AC10W .....	115	AT10 .....	196	C-MPFT12 .....	79	C1CF-1C06 .....	162
AC4UW .....	116	AT104 .....	196	C-MPR2 .....	81	C1CF-1C46 .....	162
AC4W .....	115	AT10S .....	196	C-MPR3 .....	81	C1CF-2C06 .....	165
AC6UW .....	116	AT12 .....	196	C-MZP1PK .....	64	C1CF-2C46 .....	165
AC6W .....	115	AT124 .....	196	C-NEF.5FPK.15S1 .....	61	C1CFI-1006 .....	162
AC8UW .....	116	AT12S .....	196	C-NEF.5FPK.20S1 .....	61	C1CFI-1346 .....	162
AC8W .....	115	AT16 .....	196	C-NEF.5FPK.25S1 .....	61	C1CFI-2006 .....	165
ACI4UW.2 .....	114	AT164 .....	196	C-NEF.5FPK.30S1 .....	61	C1CFI-2346 .....	165
ACI4UW.5 .....	114	AT16S .....	196	C-NEF.5FPK.35S1 .....	61	C2-1004 .....	160
ACI4UW1 .....	114	AT30 .....	197	C-NEF.5XFPK.15S1 .....	61	C2-1004A .....	160
ACI4UW2 .....	114	AT302 .....	197	C-NEF.5XFPK.20S1 .....	61	C2-1004D .....	160
ACI4W.06 .....	114	AT30S .....	197	C-NEF.5XFPK.25S1 .....	61	C2-1004EH .....	160
ACI4W.1 .....	114	AT36 .....	197	C-NEF.5XFPK.30S1 .....	61	C2-1006 .....	160
ACI4W.2 .....	114	AT362 .....	197	C-NEF.5XFPK.35S1 .....	61	C2-1006A .....	160
ACI4W.5 .....	114	AT36S .....	197	C-NEU1FPK .....	59	C2-1006D .....	160
ACSD10UW .....	134	AT4 .....	196	C-NEU.5FPK .....	59	C2-1006EH .....	160
ACSD4UW .....	134	AT44 .....	196	C-NEU.5FPK.15 .....	60	C2-1034 .....	160
ACSD6UW .....	134	AT45 .....	197	C-NEU.5FPK.20 .....	60	C2-1034A .....	160
ACST4UW .....	135	AT452 .....	197	C-NEU.5FPK.25 .....	60	C2-1034D .....	160
ACST6UW .....	135	AT45S .....	197	C-NEU.5FPK.30 .....	60	C2-1034EH .....	160
AH2CSC6MWE .....	126	AT4S .....	196	C-NEU.5FPK.35 .....	60	C2-1036 .....	160
AH2CSF6MWE .....	128	AT6 .....	196	C-NEU.5XFPK .....	59	C2-1036A .....	160
AH2CST6MWE .....	130	AT60 .....	197	C-NEU.5XFPK.15 .....	60	C2-1036D .....	160
AH2CSTF6MWE .....	132	AT602 .....	197	C-NEU.5XFPK.20 .....	60	C2-1036EH .....	160
AH2SC6MWE .....	127	AT60S .....	197	C-NEU.5XFPK.25 .....	60	C2-10ROH .....	160, 180
AH2SF6MWE .....	129	AT64 .....	196	C-NEU.5XFPK.30 .....	60	C2-10R4 .....	160, 180
AH2ST6MWE .....	131	AT6S .....	196	C-NEU.5XFPK.35 .....	60	C2-10R6 .....	160, 180, 181
AH2STF6MWE .....	133	AT8 .....	196	C-NL S1.15 .....	61	C2-10R8H .....	160, 180
AH2VLS4MWE2 .....	127	AT84 .....	196	C-NL.15L-5 .....	60	C2-1344 .....	160
AH2VLS6MWE2 .....	127	AT8S .....	196	C-NL.15S-5 .....	60	C2-1344A .....	160
AH2VLS8MWE2 .....	127	AT90 .....	197	C-NL.20L-5 .....	60	C2-1344D .....	160
AH2VLS10MWE2 .....	125	AT902 .....	197	C-NL.20S-5 .....	60	C2-1344EH .....	160
AH2VLS4MWE2 .....	125	AT90S .....	197	C-NL.25L-5 .....	60	C2-1346 .....	160
AH2VLS6MWE2 .....	125	BNV1 .....	218	C-NL.25S-5 .....	60	C2-1346A .....	160
AH2VLS8MWE2 .....	125	BNV1-D .....	218	C-NL.30L-5 .....	60	C2-1346D .....	160
AH2VLSF4MWE2 .....	129	BNV1-KZ .....	218	C-NL.30S-5 .....	60	C2-1346EH .....	160
AH2VLSF6MWE2 .....	129	BNV1LF .....	218	C-NL.35L-5 .....	60	C2-13ROH .....	160, 180
AH2VLSF8MWE2 .....	129	BNV1LF-D .....	218	C-NL.35S-5 .....	60	C2-13R4 .....	160, 180, 181
AL10UW .....	118	BNV1LF-KZ .....	218	C-NLS1.20 .....	61	C2-13R6 .....	160, 162, 180, 181
AL4UW .....	118	C-1C00H .....	160	C-NLS1.25 .....	61	C2-13R8H .....	160, 180
AL6UW .....	118	C-1C04 .....	160	C-NLS1.30 .....	61	C2-2004 .....	163
AL8UW .....	118	C-1C06 .....	160	C-NLS1.35 .....	61	C2-2004A .....	163
ASD4UW .....	134	C-1C08H .....	160	C-NNFFPK .....	59	C2-2004D .....	163
ASD6UW .....	134	C-1C30H .....	160	C-NPFPK .....	59	C2-2004EH .....	163
ASD8UW .....	134	C-1C34 .....	160	C-NTFPK .....	59	C2-2006 .....	163
ASFV .....	213	C-1C36 .....	160	C-NTXFPK .....	59	C2-2006A .....	163
ASFV2HT .....	213	C-1C38H .....	160	C-NXFPK .....	59	C2-2006D .....	163
ASFV2HT4 .....	213	C-1C40H .....	160	C-NXXFPK .....	59	C2-2006EH .....	163
ASFV40K.5 .....	85	C-1C44 .....	160	C-NYFPK .....	59	C2-2034 .....	163
ASFV40K1 .....	85	C-1C46 .....	160	C-NYXFPK .....	59	C2-2034A .....	163
ASFV40K360 .....	85	C-1C48H .....	160	C-PF .....	78	C2-2034D .....	163
ASFVHT .....	213	C-2C00H .....	163	C-PFL .....	78	C2-2034EH .....	163
ASFVHT4 .....	213	C-2C04 .....	163	C-PFM .....	78	C2-2036 .....	163
ASFVL .....	213	C-2C06 .....	163	C-PFS .....	78	C2-2036A .....	163
ASFVLHT .....	213	C-2C08H .....	163	C-VISF-1 .....	40	C2-2036D .....	163
ASFVLHT4 .....	213	C-2C30H .....	163	C-VISF-1H .....	40	C2-2036EH .....	163
ASFVO .....	213	C-2C34 .....	163	C-ZP1FPK .....	64	C2-20ROH .....	163, 182
ASFVO2HT .....	213	C-2C36 .....	163	C-10R6 .....	162	C2-20R4 .....	163, 182

# Index by product number

## GENERAL REFERENCE

C2-20R6	163, 165, 182, 183	C22Z-3184EH	166	C25-6184EMH	177	C2H-2000	163
C2-20R8H	163, 182	C22Z-3186	166	C25-6186	177	C2H-2000A	163
C2-23R0H	163, 182	C22Z-3186A	166	C25-6186A	177	C2H-2000D	163
C2-23R4	163, 182	C22Z-3186D	166	C25-6186D	177	C2H-2000EH	163
C2-23R6	163	C22Z-3186EH	166	C25-6186EMH	177	C2H-2008	163
C2-23R6	165, 182, 183	C22Z-3188	166	C25-6188	177	C2H-2008A	163
C2-23R8H	163, 182	C22Z-3188A	166	C25-6188A	177	C2H-2008D	163
C2-2344	163	C22Z-3188D	166	C25-6188D	177	C2H-2008EH	163
C2-2344A	163	C22Z-3188EH	166	C25-6188EMH	177	C2H-2030	163
C2-2344D	163	C22Z-380	166	C25-680	177	C2H-2030A	163
C2-2344EH	163	C22Z-384	166	C25-684	177	C2H-2030D	163
C2-2346	163	C22Z-386	166	C25-686	177	C2H-2030EH	163
C2-2346A	163	C22Z-388	166	C25-688	177	C2H-2038	163
C2-2346D	163	C24-10R-2	168	C25G-24520D	178	C2H-2038A	163
C2-2346EH	163	C24-10R-5	168, 169	C25G-24520EMT	178	C2H-2038D	163
C22-310	167	C24-10R-1	168, 169	C25G-24524D	178	C2H-2038EH	163
C22-314	167	C24-10R-2	169	C25G-24524EMT	178	C2H-2340	163
C22-316	167	C24-1C8	169	C25G-24528D	178	C2H-2340A	163
C22-318	167	C24-2184-5	169	C25G-24528EMT	178	C2H-2340D	163
C22-3180	167	C24-2184-5A	169	C25G-24R20	178	C2H-2340EH	163
C22-3180A	167	C24-2184-5D	169	C25G-24R24	178	C2H-2348	163
C22-3180D	167	C24-2184-5EH	169	C25G-24R28	178	C2H-2348A	163
C22-3180EH	167	C24-2184-1	169	C25G-2C520	178	C2H-2348D	163
C22-3184	167	C24-2184-1A	169	C25G-2C524	178	C2H-2348EH	163
C22-3184A	167	C24-2184-1D	169	C25G-2C528	178	C2N-4000	158
C22-3184D	167	C24-2184-1EH	169	C25Z-3180	176	C2N-4000D	158
C22-3184EH	167	C24-2184-2	169	C25Z-3180A	176	C2N-4000EH	158
C22-3186	167	C24-2184-2A	169	C25Z-3180D	176	C2N-4006	158
C22-3186A	167	C24-2184-2D	169	C25Z-3180EMH	176	C2N-4006D	158
C22-3186D	167	C24-2184-2EH	169	C25Z-31814	176	C2N-4006EH	158
C22-3186EH	167	C24Z-1C8	168	C25Z-31814A	176	C2N-40R0	158
C22-3188	167	C24Z-21 2184-5D	168	C25Z-31814D	176	C2N-40R6	158
C22-3188A	167	C24Z-2184-2	168	C25Z-31814EMH	176	C2N-4340	158
C22-3188D	167	C24Z-2184-2D	168	C25Z-3186	176	C2N-4340D	158
C22-3188EH	167	C24Z-2184-5D	168	C25Z-3186A	176	C2N-4340EH	158
C22-380	167	C24Z-2184-1D	168	C25Z-3186D	176	C2N-4346	158
C22-384	167	C24Z-2184-1D	168	C25Z-3186EMH	176	C2N-4346D	158
C22-386	167	C25-310	177	C25Z-3188	176	C2N-4346EH	158
C22-388	167	C25-314	177	C25Z-3188A	176	C2N-43R0	158
C22-610	167	C25-316	177	C25Z-3188D	176	C2N-43R6	158
C22-614	167	C25-3180	177	C25Z-3188EMH	176	C2N-4C00	158
C22-616	167	C25-3180A	177	C25Z-325	176	C2N-4C06	158
C22-618	167	C25-3180D	177	C25Z-380	176	C2N-4C40	158
C22-6180	167	C25-3180EMH	177	C25Z-38-14	176	C2N-4C46	158
C22-6180A	167	C25-3184A	177	C25Z-386	176	C2V-1006	181
C22-6180D	167	C25-3184D	177	C25Z-388	176	C2V-1006A	181
C22-6180EH	167	C25-3184EMH	177	C2H-1008A	160	C2V-1006D	181
C22-6184	167	C25-3186	177	C2H-1000	160	C2V-1006EH	181
C22-6184A	167	C25-3186A	177	C2H-1000A	160	C2V-1346	181
C22-6184D	167	C25-3186D	177	C2H-1000D	160	C2V-1346A	181
C22-6184EH	167	C25-3186EMH	177	C2H-1000EH	160	C2V-1346D	181
C22-6186	167	C25-3188	177	C2H-1008	160	C2V-1346EH	181
C22-6186A	167	C25-3188A0	177	C2H-1008D	160	C2V-1C06	181
C22-6186D	167	C25-3188D	177	C2H-1008EH	160	C2V-1C46	181
C22-6186EH	167	C25-3188EMH	177	C2H-1030	160	C2V-2006	183
C22-6188	167	C25-380	177	C2H-1030A	160	C2V-2006A	183
C22-6188A	167	C25-384	177	C2H-1030D	160	C2V-2006D	183
C22-6188D	167	C25-386	177	C2H-1030EH	160	C2V-2006EH	183
C22-6188EH	167	C25-388	177	C2H-1038	160	C2V-2346	183
C22-680	167	C25-610	177	C2H-1038A	160	C2V-2346A	183
C22-684	167	C25-614	177	C2H-1038D	160	C2V-2346D	183
C22-686	167	C25-616	177	C2H-1038EH	160	C2V-2346EH	183
C22-688	167	C25-618	177	C2H-1340	160	C2V-2C06	183
C22Z-3180	166	C25-6180	177	C2H-1340A	160	C2V-2C46	183
C22Z-3180A	166	C25-6180A	177	C2H-1340D	160	C3-1006	181
C22Z-3180D	166	C25-6180D	177	C2H-1340EH	160	C3-1006A	181
C22Z-3180EH	166	C25-6180EMH	177	C2H-1348	160	C3-1006D	181
C22Z-3184	166	C25-6184	177	C2H-1348A	160	C3-1006EH	181
C22Z-3184A	166	C25-6184A	177	C2H-1348D	160	C3-1346	181
C22Z-3184D	166	C25-6184D	177	C2H-1348EH	160	C3-1346A	181

GENERAL REFERENCE

C3-1346D.....	181	C4-00R-02.....	161	C45-97R4.....	179	C5-2C30H.....	174
C3-1346EH.....	181	C4-00R-05.....	161	C45-97R6.....	179	C5-2C34.....	174
C3-1C06.....	181	C4-0344-01.....	161	C4N-4004-004.....	159	C5-2C36.....	174
C3-1C46.....	181	C4-0344-01A.....	161	C4N-4004-004D.....	159	C5-2C38H.....	174
C3-2006.....	183	C4-0344-01D.....	161	C4N-4004-004EH.....	159	C5-2C40H.....	174
C3-2006A.....	183	C4-0344-01EH.....	161	C4N-4004-01.....	159	C5-2C44.....	174
C3-2006D.....	183	C4-0344-02.....	161	C4N-4004-01D.....	159	C5-2C46.....	174
C3-2006EH.....	183	C4-0344-02A.....	161	C4N-4004-01EH.....	159	C5-2C48H.....	174
C3-2346.....	183	C4-0344-02D.....	161	C4N-4004-02.....	159	C52-1000I.....	180
C3-2346A.....	183	C4-0344-02EH.....	161	C4N-4004-02D.....	159	C52-1000I-S.....	180
C3-2346D.....	183	C4-0344-05.....	161	C4N-4004-02EH.....	159	C52-1000IX.....	180
C3-2346EH.....	183	C4-0344-05A.....	161	C4N-40R-004.....	159	C52-1004I.....	180
C3-2C06.....	183	C4-0344-05D.....	161	C4N-40R-01.....	159	C52-1004I-S.....	180
C3-2C46.....	183	C4-0344-05EH.....	161	C4N-40R-02.....	159	C52-1004IX.....	180
C360C.....	58	C4-03R-01.....	161	C4N-4344-004.....	159	C52-1006I.....	180
C360CFS.....	58	C4-03R-02.....	161	C4N-4344-004D.....	159	C52-1006I-S.....	180
C360CPK.....	57	C4-03R-05.....	161	C4N-4344-004EH.....	159	C52-1006IX.....	180
C360ET.....	57,67	C4-0C0.....	161	C4N-4344-01.....	159	C52-1008I.....	180
C360EZR.5XC.....	39	C4-0C4.....	161	C4N-4344-01D.....	159	C52-1008I-S.....	180
C360IZR.5TS6.....	38	C4-1004-1.....	164	C4N-4344-01EH.....	159	C52-1008IX.....	180
C360IZR.5TS6FS.....	38	C4-1004-1A.....	164	C4N-4344-02.....	159	C52-1340I.....	180
C360IZR.5TS6PK.....	38	C4-1004-1D.....	164	C4N-4344-02D.....	159	C52-1340I-S.....	180
C360IZR1S6.....	38	C4-1004-1EH.....	164	C4N-4344-02EH.....	159	C52-1340IX.....	180
C360IZR1S6AL.....	38	C4-1004-2.....	164	C4N-43R-004.....	159	C52-1344I.....	180
C360IZR1S6FS.....	38	C4-1004-2A.....	164	C4N-43R-01.....	159	C52-1344I-S.....	180
C360IZR1S6PK.....	38	C4-1004-2D.....	164	C4N-43R-02.....	159	C52-1344IX.....	180
C360NFFS.....	58	C4-1004-2EH.....	164	C4N-4C0.....	159	C52-1346I.....	180
C360NFPK.....	57	C4-1004-5.....	164	C4N-4C4.....	159	C52-1346I-S.....	180
C360NF56.....	58	C4-1004-5A.....	164	C4UW.....	116	C52-1346IX.....	180
C360PPK.....	57	C4-1004-5D.....	164	C4UWE.....	109	C52-1348I.....	180
C360QTPK2.....	57	C4-1004-5EH.....	164	C4W.....	115	C52-1348I-S.....	180
C360QTPK4.....	57	C4-1034-1.....	164	C4WE.....	108	C52-1348IX.....	180
C360QTPK6.....	57	C4-1034-1A.....	164	C5-2004.....	174	C52-1C00.....	180
C360QUPK2.....	57	C4-1034-1D.....	164	C5-2004A.....	174	C52-1C04.....	180
C360QUPK4.....	57	C4-1034-1EH.....	164	C5-2004D.....	174	C52-1C06.....	180
C360QUPK6.....	57	C4-1034-2.....	164	C5-2004EMH.....	174	C52-1C08.....	180
C360QXPK2.....	57	C4-1034-2A.....	164	C5-2006.....	174	C52-1C40.....	180
C360QXPK4.....	57	C4-1034-2D.....	164	C5-2006A.....	174	C52-1C44.....	180
C360QXPK6.....	57	C4-1034-2EH.....	164	C5-2006D.....	174	C52-1C46.....	180
C360RU.5FS2.....	58	C4-1034-5.....	164	C5-2006EMH.....	174	C52-1C48.....	180
C360RU.5FS4.....	58	C4-1034-5A.....	164	C5-2006EMTD.....	175	C52-2000I.....	182
C360RU.5FS6.....	58	C4-1034-5D.....	164	C5-2034.....	174	C52-2000I-S.....	182
C360RU.5S62.....	58	C4-1034-5EH.....	164	C5-2034A.....	174	C52-2000IX.....	182
C360RU.5S64.....	58	C4-10R-1.....	164	C5-2034D.....	174	C52-2004I.....	182
C360RU.5S66.....	58	C4-10R-2.....	164	C5-2034EMH.....	174	C52-2004I-S.....	182
C360RU1FS6.....	58	C4-10R-5.....	164	C5-2036.....	174	C52-2004IX.....	182
C360RU1PK6.....	57	C4-1344-1.....	164	C5-2036A.....	174	C52-2006I.....	182
C360RU1S66.....	58	C4-1344-1A.....	164	C5-2036D.....	174	C52-2006I-S.....	182
C360UFS2.....	58	C4-1344-1D.....	164	C5-2036EMH.....	174	C52-2006IX.....	182
C360UFS4.....	58	C4-1344-1EH.....	164	C5-20R0H.....	174, 175, 186	C52-2008I.....	182
C360UFS6.....	58	C4-1344-2.....	164	C5-20R4.....	174, 186	C52-2008I-S.....	182
C360UPK2.....	57	C4-1344-2A.....	164	C5-20R6.....	174, 175, 186	C52-2008IX.....	182
C360UPK4.....	57	C4-1344-2D.....	164	C5-20R8H.....	174, 175, 186	C52-2340I.....	182
C360UPK64.....	57	C4-1344-2EH.....	164	C5-2344.....	174	C52-2340I-S.....	182
C360US62.....	58	C4-1344-5.....	164	C5-2344A.....	174	C52-2340IX.....	182
C360US64.....	58	C4-1344-5A.....	164	C5-2344D.....	174	C52-2344I.....	182
C360US66.....	58	C4-1344-5D.....	164	C5-2344EMH.....	174	C52-2344I-S.....	182
C4-0004-01.....	161	C4-1344-5EH.....	164	C5-2346.....	174	C52-2344IX.....	182
C4-0004-01A.....	161	C4-13R-1.....	164	C5-2346A.....	174	C52-2346I.....	182
C4-0004-01D.....	161	C4-13R-2.....	164	C5-2346D.....	174	C52-2346I-S.....	182
C4-0004-01EH.....	161	C4-13R-5.....	164	C5-2346EMH.....	174	C52-2346IX.....	182
C4-0004-02.....	161	C4-1C0.....	164	C5-2346EMTD.....	175	C52-2348I.....	182
C4-0004-02A.....	161	C4-1C3.....	164	C5-23R0H.....	174, 175, 186	C52-2348I-S.....	182
C4-0004-02D.....	161	C4-1C4.....	164	C5-23R4.....	174, 186	C52-2348IX.....	182
C4-0004-02EH.....	161	C45-9784A.....	179	C5-23R6.....	174, 175, 186	C52-2C00.....	182
C4-0004-05.....	161	C45-9784D.....	179	C5-23R8H.....	174, 175, 186	C52-2C04.....	182
C4-0004-05A.....	161	C45-9784EMT.....	179	C5-2C00H.....	174	C52-2C06.....	182
C4-0004-05D.....	161	C45-9786A.....	179	C5-2C04.....	174	C52-2C08.....	182
C4-0004-05EH.....	161	C45-9786D0.....	179	C5-2C06.....	174	C52-2C40.....	182
C4-00R-01.....	161	C45-9786EMT.....	179	C5-2C08H.....	174	C52-2C44.....	182

# Index by product number

## GENERAL REFERENCE

C52-2C46.....	182	C5M1KF.....	74	C65-6186I-S.....	187	C72MFSU-4676D.....	154
C52-2C48.....	182	C5M1PK.....	74	C65-6188I.....	187	C72MFSU-4676EH.....	154
C55-2000I.....	186	C5M2KF.....	74	C65-6188IA.....	187	C72MU-4674.....	154
C55-2000IA.....	186	C5M2PK.....	74	C65-6188I-S.....	187	C72MU-4674A.....	154
C55-2000I-S.....	186	C6-1006.....	162	C65Z-3180I.....	187	C72MU-4674D.....	154
C55-2000IX.....	186	C6-1006A.....	162	C65Z-3180IA.....	187	C72MU-4674EH.....	154
C55-2004I.....	186	C6-1006D.....	162	C65Z-3180I-S.....	187	C72MU-4676.....	154
C55-2004IA.....	186	C6-1006E.....	162	C65Z-3184I.....	187	C72MU-4676A.....	154
C55-2004I-S.....	186	C6-1006EH.....	162	C65Z-3184IA.....	187	C72MU-4676D.....	154
C55-2004IX.....	186	C6-1346.....	162	C65Z-3184I-S.....	187	C72MU-4676EH.....	154
C55-2006I.....	186	C6-1346A.....	162	C65Z-3186I.....	187	C72MX-6670.....	154
C55-2006IA.....	186	C6-1346D.....	162	C65Z-3186IA.....	187	C72MX-6670A.....	154
C55-2006I-S.....	186	C6-1346E.....	162	C65Z-3186I-S.....	187	C72MX-6670D.....	154
C55-2006IX.....	186	C6-1346EH.....	162	C65Z-3188I.....	187	C72MX-6670ED.....	154
C55-2008I.....	186	C6-1C06.....	162	C65Z-3188IA.....	187	C72MX-6676.....	154
C55-2008IA.....	186	C6-1C46.....	162	C65Z-3188I-S.....	187	C72MX-6676A.....	154
C55-2008I-S.....	186	C6-2006.....	165	C6UW.....	116	C72MX-6676D.....	154
C55-2008IX.....	186	C6-2006A.....	165	C6UWE.....	109	C72MX-6676EH.....	154
C55-2340I.....	186	C6-2006D.....	165	C6W.....	115	C72N-66R0.....	155
C55-2340IA.....	186	C6-2006EH.....	165	C6WE.....	108	C72N-66R6.....	155
C55-2340I-S5.....	186	C6-2346.....	165	C72-16R0.....	156	C72N-6C70.....	155
C55-2340IX.....	186	C6-2346A.....	165	C72-16R0.....	156	C72N-6C76.....	155
C55-2344I.....	186	C6-2346D.....	165	C72-16R4.....	156	C72NX-6670.....	155
C55-2344IA.....	186	C6-2346EH.....	165	C72-16R4.....	156	C72NX-6670A.....	155
C55-2344I-S.....	186	C6-2C06.....	165	C72-16R6.....	156	C72NX-6670D.....	155
C55-2344IX.....	186	C6-2C46.....	165	C72-16R6.....	156	C72NX-6670ED.....	155
C55-2346I.....	186	C62-3180I.....	185	C72-16R8.....	156	C72NX-6676.....	155
C55-2346IA.....	186	C62-3180I-S.....	185	C72-16R8.....	156	C72NX-6676A.....	155
C55-2346I-S.....	186	C62-3184I.....	185	C72-1C70.....	156	C72NX-6676D.....	155
C55-2346IX.....	186	C62-3184I-S.....	185	C72-1C70.....	156	C72NX-6676EH.....	155
C55-2348I.....	186	C62-3186I.....	185	C72-1C74.....	156	C72X-1670.....	156
C55-2348IA5.....	186	C62-3186I-S.....	185	C72-1C74.....	156	C72X-1670A.....	156
C55-2348I-S.....	186	C62-3188I.....	185	C72-1C76.....	156	C72X-1670D.....	156
C55-2348IX.....	186	C62-3188I-S.....	185	C72-1C76.....	156	C72X-1670ED.....	156
C55-2C00.....	186	C62-6180I.....	185	C72-1C78.....	156	C72X-1674.....	156
C55-2C04.....	186	C62-6180I-S.....	185	C72-1C78.....	156	C72X-1674A.....	156
C55-2C06.....	186	C62-6184I.....	185	C72H-1670.....	156	C72X-1674D.....	156
C55-2C08.....	186	C62-6184I-S.....	185	C72H-1670A.....	156	C72X-1674EH.....	156
C55-2C40.....	186	C62-6186I.....	185	C72H-1670D.....	156	C72X-1676.....	156
C55-2C44.....	186	C62-6186I-S.....	185	C72H-1670ED.....	156	C72X-1676A.....	156
C55-2C46.....	186	C62-6188I.....	185	C72H-1674.....	156	C72X-1676D.....	156
C55-2C48.....	186	C62-6188I-S.....	185	C72H-1674A.....	156	C72X-1676EH.....	156
C5H-2000.....	174	C62Z-3180I.....	184	C72H-1674D.....	156	C72X-1678.....	156
C5H-2000A.....	174	C62Z-3180I-S.....	184	C72H-1674EH.....	156	C72X-1678A.....	156
C5H-2000D.....	174	C62Z-3184I.....	184	C72H-1676.....	156	C72X-1678D.....	156
C5H-2000EMT.....	174	C62Z-3184I-S.....	184	C72H-1676A.....	156	C74-16R-.02.....	157
C5H-2000EMTD.....	175	C62Z-3186I.....	184	C72H-1676D.....	156	C74-16R-.02.....	157
C5H-2008.....	174	C62Z-3186I-S.....	184	C72H-1676EH.....	156	C74-16R-.05.....	157
C5H-2008A.....	174	C62Z-3188I.....	184	C72H-1678.....	156	C74-16R-.05.....	157
C5H-2008D.....	174	C62Z-3188I-S.....	184	C72H-1678A.....	156	C74-16R-1.....	157
C5H-2008EMT.....	174	C65-3180I.....	187	C72H-1678D.....	156	C74-1C7.....	157
C5H-2008EMTD.....	175	C65-3180IA.....	187	C72H-1678ED.....	156	C74H-1674-.02.....	157
C5H-2030.....	174	C65-3180I-S.....	187	C72M-46R4.....	154	C74H-1674-.02A.....	157
C5H-2030A.....	174	C65-3184I.....	187	C72M-46R4.....	154	C74H-1674-.02D.....	157
C5H-2030D.....	174	C65-3184IA.....	187	C72M-46R6.....	154	C74H-1674-.02EH.....	157
C5H-2030EMT.....	174	C65-3184I-S.....	187	C72M-46R6.....	154	C74H-1674-.05.....	157
C5H-2038.....	174	C65-3186I.....	187	C72M-4C74.....	154	C74H-1674-.05A.....	157
C5H-2038A.....	174	C65-3186IA.....	187	C72M-4C74.....	154	C74H-1674-.05D.....	157
C5H-2038D.....	174	C65-3186I-S.....	187	C72M-4C76.....	154	C74H-1674-.05EH.....	157
C5H-2038EMT.....	174	C65-3188I.....	187	C72M-4C76.....	154	C74H-1674-1.....	157
C5H-2340.....	174	C65-3188IA.....	187	C72M-66R0.....	154	C74H-1674-1A.....	157
C5H-2340A.....	174	C65-3188I-S.....	187	C72M-66R6.....	154	C74H-1674-1D.....	157
C5H-2340D.....	174	C65-6180I.....	187	C72M-6C70.....	154	C74H-1674-1EH.....	157
C5H-2340EMT.....	174	C65-6180IA.....	187	C72M-6C76.....	154	C74N-66R-.01.....	155
C5H-2340EMTD.....	175	C65-6180I-S.....	187	C72MFSU-4674.....	154	C74N-66R-.02.....	155
C5H-2348.....	174	C65-6184I.....	187	C72MFSU-4674A.....	154	C74N-66R-.03.....	155
C5H-2348A.....	174	C65-6184IA.....	187	C72MFSU-4674D.....	154	C74N-6C7.....	155
C5H-2348D.....	174	C65-6184I-S.....	187	C72MFSU-4674EH.....	154	C74NX-6674-.01.....	155
C5H-2348EMT.....	174	C65-6186I.....	187	C72MFSU-4676.....	154		
C5H-2348EMTD.....	175	C65-6186IA.....	187	C72MFSU-4676A.....	154		

GENERAL REFERENCE

C74NX-6674-01A	155	CBUMKF	73	CFL-1BR	68	CFS-A03018-010B	236
C74NX-6674-01D	155	CBUMPK	73	CFL-1DG	68	CFS-A03018-018B	236
C74NX-6674-01EH	155	CBUMS6	73	CFL-1E	68	CFS-A03018-040B	236
C74NX-6674-02	155	CBUPK	73	CFL-1G	68	CFS-A03018-100B	236
C74NX-6674-02A	155	CBUS6	73	CFL-1L	68	CFS-A03025-010B	236
C74NX-6674-02D	155	CCKF-5	71	CFL-1N	68	CFS-A03025-025B	236
C74NX-6674-02EH	155	CCPK-5	71	CFL-1P	68	CFS-A03025-050B	236
C74NX-6674-03	155	CD10-4841-M1A	82	CFL-1PK	68	CFS-A03025-100B	236
C74NX-6674-03A	155	CD50-8182-M2A	82	CFL-1R	68	CFS-A03025-150B	236
C74NX-6674-03D	155	CEF1	43	CFL-1W	68	CFS-A03032-010B	236
C74NX-6674-03EH	155	CEF1.5	43	CFL-1Y	68	CFS-A03032-025B	236
C74X-1674-02	157	CEF1.5F	43	CFL-2A	68	CFS-A03032-032B	236
C74X-1674-02A	157	CEF1F	43	CFL-2A-PK	68	CFS-A03032-050B	236
C74X-1674-02D	157	CEF2.51.0	43	CFL-2BE	68	CFS-A03032-100B	236
C74X-1674-02EH	157	CEF2.51.0F	43	CFL-2BK	68	CFS-A03032-200B	236
C74X-1674-05	157	CEF211.0	43	CFL-2BR	68	CFS-A03032-300B	236
C74X-1674-05A	157	CEF211.0F	43	CFL-2DG	68	CFS-A03032-400B	236
C74X-1674-05D	157	CEF212.0	43	CFL-2E	68	CFS-A03032-500B	236
C74X-1674-05EH	157	CEF212.0F	43	CFL-2G	68	CFS-A03053-015B	236
C74X-1674-1	157	CEF412.1	44	CFL-2L	68	CFS-A03053-050B	236
C74X-1674-1A	157	CEF412.1F	44	CFL-2N	68	CFS-A03053-100B	236
C74X-1674-1D	157	CEF413.0	44	CFL-2P	68	CFS-A03053-150B	236
C74X-1674-1EH	157	CEF413.0F	44	CFL-2PK	68	CFS-A03053-300B	236
C75-16R0	173	CEF414.0	44	CFL-2R	68	CFS-A03053-500B	236
C75-16R6	173	CEF414.0F	44	CFL-2W	68	CFS-A04018-018B	236
C75-16R8	173	CEF414.6	44	CFL-2Y	68	CFS-A04018-040B	236
C75-1C70	173	CEF414.6F	44	CFL-4D	72, 179	CFS-A06025-010B	236
C75-1C76	173	CEN1KF	69	CFL-4KF	72, 179	CFS-A06025-025B	236
C75-1C78	173	CEN1PK	69	CFL-4PPS	179	CFS-A06025-050B	236
C75H-1670A	173	CEN2KF	69	CFLAKF	76	CFS-A06025-100B	236
C75H-1670D	173	CEN2PK	69	CFLAPFA	76	CFS-A06025-150B	236
C75H-1670EMT	173	CEPA2KF	77	CFLAPK	76	CFS-A06032-010B	236
C75H-1676A	173	CEPA2PK	77	CFL-CB1KF	68	CFS-A06032-025B	236
C75H-1676D	173	CEPA4KF	77	CFL-CB1PK	68	CFS-A06032-032B	236
C75H-1676EMH	173	CEPA4PK	77	CFL-CB2KF	68	CFS-A06032-050B	236
C75H-1678A	173	CF-1A	69	CFL-CB2PK	68	CFS-A06032-100B	236
C75H-1678D	173	CF-1BE	69	CFL-CB4KF-S	72, 179	CFS-A06032-200B	236
C75H-1678EMT	173	CF-1BK	69	CFPA2KF	77	CFS-A06032-300B	236
C75N-66R0	172	CF-1BR	69	CFPA2PK	77	CFS-A06032-400B	236
C75N-66R6	172	CF-1DG	69	CFPA4KF	77	CFS-A06032-500B	236
C75N-66R8	172	CF-1E	69	CFPA4PK	77	CFS-A06053-100B	236
C75N-6C70	172	CF-1G	69	CFS-A01010-010B	236	CFS-A06053-150B	236
C75N-6C76	172	CF-1L	69	CFS-A01010-020B	236	CFS-A06053-300B	236
C75N-6C78	172	CF-1N	69	CFS-A01010-040B	236	CFS-A06053-500B	236
C75NX-6670A	172	CF-1P	69	CFS-A01018-010B	236	CFS-B01010-010B	237
C75NX-6670D	172	CF-1R	69	CFS-A01018-018B	236	CFS-B01010-020B	237
C75NX-6670EMT	172	CF-1W	69	CFS-A01018-040B	236	CFS-B01018-018B	237
C75NX-6676A	172	CF-1Y	69	CFS-A01525-010B	236	CFS-B01018-040B	237
C75NX-6676D	172	CF-2A	69	CFS-A01525-025B	236	CFS-B01525-010B	237
C75NX-6676EMH	172	CF-2BE	69	CFS-A01525-050B	236	CFS-B01525-025B	237
C75NX-6678A	172	CF-2BK	69	CFS-A01525-100B	236	CFS-B01525-050B	237
C75NX-6678D	172	CF-2BR	69	CFS-A01525-150B	236	CFS-B01525-100B	237
C75NX-6678EMT	172	CF-2DG	69	CFS-A01532-010B	236	CFS-B01532-010B	237
C8UW	116	CF-2E	69	CFS-A01532-025B	236	CFS-B01532-025B	237
C8UWE	109	CF-2G	69	CFS-A01532-032B	236	CFS-B01532-050B	237
C8W	115	CF-2L	69	CFS-A01532-050B	236	CFS-B01532-100B	237
C8WE	108	CF-2N	69	CFS-A01532-100B	236	CFS-B01532-200B	237
C9M1KF	74	CF-2P	69	CFS-A01532-200B	236	CFS-B01532-300B	237
C9M1PK	74	CF-2R	69	CFS-A01532-300B	236	CFS-B01532-500B	237
C9M2KF	74	CF-2W	69	CFS-A01532-400B	236	CFS-B01553-050B	237
C9M2PK	74	CF-2Y	69	CFS-A01532-500B	236	CFS-B01553-100B	237
CBUCKF	73	CF-W1	69	CFS-A01553-015B	236	CFS-B01553-150B	237
CBUCPK	73	CF-W2	69	CFS-A01553-050B	236	CFS-B01553-200B	237
CBUCS6	73	CFE-S10	78	CFS-A01553-100B	236	CFS-B01553-265B	237
CBUFLKF	76	CFE-S2	78	CFS-A01553-150B	236	CFS-B01553-300B	237
CBUFLPK	76	CFE-S75	78	CFS-A01553-300B	236	CFS-B01553-500B	237
CBUKF	73	CFL-1A	68	CFS-A01553-500B	236	CFS-B02010-010B	237
CBULKF	73	CFL-1A-PK	68	CFS-A02010-010B	236	CFS-B02010-020B	237
CBULPK	73	CFL-1BE	68	CFS-A02010-020B	236	CFS-B02018-018B	237
CBULS6	73	CFL-1BK	68	CFS-A02010-04 0B	236	CFS-B02018-040B	237

# Index by product number

## GENERAL REFERENCE

CFS-B03018-018B.....	237	CFS-D03053-050B.....	237	CFS-PA3053-200.....	242	CFT-TM.....	70
CFS-B03018-040B.....	237	CFS-D03053-083B.....	237	CFS-PB1532-100.....	244	CFT-TXC.....	70
CFS-B03025-010B.....	237	CFS-D03053-100B.....	237	CFS-PB1553-200.....	244	CFT-TXL.....	70
CFS-B03025-025B.....	237	CFS-D06025-025B.....	237	CFS-PB3032-100.....	244	CFT1K-110.....	70
CFS-B03025-050B.....	237	CFS-D06025-050B.....	237	CFS-PB3053-200.....	244	CFT1K-220.....	70
CFS-B03025-100B.....	237	CFS-D06032-025B.....	237	CFS-PC1532-100.....	244	CFT2K-110.....	70
CFS-B03032-010B.....	237	CFS-D06032-050B.....	237	CFS-PC1553-200.....	244	CFT2K-220.....	70
CFS-B03032-025B.....	237	CFS-D06032-100B.....	237	CFS-PC3032-100.....	244	CGC41.....	75
CFS-B03032-050B.....	237	CFS-D06053-050B.....	237	CFS-PC3053-200.....	244	CGC41KF.....	75
CFS-B03032-100B.....	237	CFS-E01018-100A.....	238	CFS-PD1532-100.....	242	CGC42.....	75
CFS-B03032-200B.....	237	CFS-E01525-140A.....	238	CFS-PD1553-200.....	242	CGC42KF.....	75
CFS-B03032-300B.....	237	CFS-E01532-180A.....	238	CFS-PD3032-100.....	242	CGCB.....	75
CFS-B03032-500B.....	237	CFS-E01553-300A.....	238	CFS-PD3053-200.....	242	CGCBKF.....	75
CFS-B03053-050B.....	237	CFS-E02018-100A.....	238	CFS-PN1532-100.....	244	CGCG41.....	75
CFS-B03053-100B.....	237	CFS-E02520-112A.....	238	CFS-PN1553-200.....	244	CGCG42.....	75
CFS-B03053-150B.....	237	CFS-E03018-100A.....	238	CFS-PN3032-100.....	244	CGCN.....	75
CFS-B03053-265B.....	237	CFS-E03025-140A.....	238	CFS-PN3053-200.....	244	CGCNKF.....	75
CFS-B03053-300B.....	237	CFS-E03032-180A.....	238	CFS-PP1532-100.....	244	CGCR.....	75
CFS-B03053-500B.....	237	CFS-E03053-300A.....	238	CFS-PP1553-200.....	244	CGCRKF.....	75
CFS-B04018-018B.....	237	CFS-E04018-100A.....	238	CFS-PP3032-100.....	244	CGFT.....	67
CFS-B04018-040B.....	237	CFS-E06025-140A.....	238	CFS-PP3053-200.....	244	CGFT.....	178
CFS-B06025-010B.....	237	CFS-E06032-180A.....	238	CFS-PQ1532-100.....	242	CI4UW.2.....	114
CFS-B06025-025B.....	237	CFS-E06053-300A.....	238	CFS-PQ1553-200.....	242	CI4UW.5.....	114
CFS-B06025-050B.....	237	CFS-E07553-300A.....	238	CFS-PQ3032-100.....	242	CI4UW1.....	114
CFS-B06025-100B.....	237	CFS-F01525-025A.....	238	CFS-PQ3053-200.....	242	CI4UW2.....	114
CFS-B06032-010B.....	237	CFS-F01525-050A.....	238	CFS-PR1532-100.....	244	CI4UWE.2.....	105
CFS-B06032-025B.....	237	CFS-F01532-025A.....	238	CFS-PR1553-200.....	244	CI4UWE.5.....	105
CFS-B06032-050B.....	237	CFS-F01532-050A.....	238	CFS-PR3032-100.....	244	CI4UWE1.....	105
CFS-B06032-100B.....	237	CFS-F01532-100A.....	238	CFS-PR3053-200.....	244	CI4UWE2.....	105
CFS-B06032-200B.....	237	CFS-F01553-050A.....	238	CFS-PS1532-100.....	244	CI4W.06.....	114
CFS-B06032-300B.....	237	CFS-F01553-100A.....	238	CFS-PS1553-200.....	244	CI4W.1.....	114
CFS-B06032-500B.....	237	CFS-F03025-025A.....	238	CFS-PS3032-100.....	244	CI4W.2.....	114
CFS-B06053-100B.....	237	CFS-F03025-050A.....	238	CFS-PS3053-200.....	244	CI4W.5.....	114
CFS-B06053-150B.....	237	CFS-F03032-025A.....	238	CFS-X1553-200.....	240	CI4WE.06.....	104
CFS-B06053-200B.....	237	CFS-F03032-050A.....	238	CFS-X1553-500.....	240	CI4WE.1.....	104
CFS-B06053-265B.....	237	CFS-F03032-100A.....	238	CFS-X3053-200.....	240	CI4WE.2.....	104
CFS-B06053-300B.....	237	CFS-F03053-050A.....	238	CFS-X3053-500.....	240	CI4WE.5.....	104
CFS-B06053-500B.....	237	CFS-F03053-100A.....	238	CFS-Y1553-100.....	242	CM.....	203
CFS-C01525-025B.....	236	CFS-F06025-025A.....	238	CFS-Y3053-100.....	242	CM1XKF.....	75
CFS-C01525-050B.....	236	CFS-F06025-050A.....	238	CFS-Y5053-100.....	242	CM1XPK.....	75
CFS-C01532-025B.....	236	CFS-F06032-025A.....	238	CFS-Z1553-100.....	242	CM2XKF.....	75
CFS-C01532-050B.....	236	CFS-F06032-050A.....	238	CFS-Z3053-100.....	242	CM2XPK.....	75
CFS-C01553-050B.....	236	CFS-F06032-100A.....	238	CFS-Z5053-100.....	242	CMH.....	208
CFS-C01553-100B.....	236	CFS-F06053-050A.....	238	CFSL100FEP.....	167, 185	CMH11H.....	208
CFS-C03025-025B.....	236	CFS-F06053-100A.....	238	CFSL100PK.....	167, 185	CMH11L.....	208
CFS-C03025-050B.....	236	CFS-G01010-010A.....	238	CFSL100TF.....	167, 185	CMH12H.....	208
CFS-C03032-025B.....	236	CFS-G01018-018A.....	238	CFSL1KFEP.....	167, 185	CMH12L.....	208
CFS-C03032-050B.....	236	CFS-G01525-025A.....	238	CFSL1KPK.....	167, 185	CMH13.....	208
CFS-C03053-050B.....	236	CFS-G01532-025A.....	238	CFSL1KTF.....	167, 185	CMH13H.....	208
CFS-C03053-100B.....	236	CFS-G01532-050A.....	238	CFSL20FEP.....	167, 185	CMH13L.....	208
CFS-C06025-025B.....	236	CFS-G01532-100A.....	238	CFSL20PK.....	167, 185	CMHMP.....	208
CFS-C06025-050B.....	236	CFS-G01553-050A.....	238	CFSL20TF.....	167, 185	CMLAKF.....	76
CFS-C06032-025B.....	236	CFS-G01553-100A.....	238	CFSL250FEP.....	167, 185	CMLAPFA.....	76
CFS-C06032-050B.....	236	CFS-G02010-010A.....	238	CFSL250PK.....	167, 185	CMLAPK.....	76
CFS-C06053-050B.....	236	CFS-G02018-018A.....	238	CFSL250TF.....	167, 185	CNFT.....	67
CFS-C06053-100B.....	236	CFS-G03025-025A.....	238	CFSL2KFEP.....	167, 185	CNNF1PK.....	178
CFS-D01525-025B.....	237	CFS-G03032-025A.....	238	CFSL2KPK.....	167, 185	CNV1A10S1.....	214
CFS-D01525-050B.....	237	CFS-G03032-050A.....	238	CFSL2KTF.....	167, 185	CNV1A150S1.....	214
CFS-D01532-025B.....	237	CFS-G03032-100A.....	238	CFSL500FEP.....	167, 185	CNV1A250S1.....	214
CFS-D01532-050B.....	237	CFS-G03053-050A.....	238	CFSL500PK.....	167, 185	CNV1A500S1.....	214
CFS-D01532-100B.....	237	CFS-G03053-100A.....	238	CFSL500TF.....	167, 185	CNV1A50S1.....	214
CFS-D01553-050B.....	237	CFS-G06025-025A.....	238	CFSL50FEP.....	167, 185	CNV1S10S1.....	214
CFS-D01553-083B.....	237	CFS-G06032-025A.....	238	CFSL50PK.....	167, 185	CNV1S150S1.....	214
CFS-D01553-100B.....	237	CFS-G06032-050A.....	238	CFSL50TF.....	167, 185	CNV1S250S1.....	214
CFS-D03025-015B.....	237	CFS-G06053-100A.....	238	CFT-110.....	70	CNV1S500S1.....	214
CFS-D03025-025B.....	237	CFS-N03025-025.....	235	CFT-220.....	70	CNV1S50S1.....	214
CFS-D03025-050B.....	237	CFS-N03053-100.....	235	CFT-H.....	70	CNVEKB.....	214
CFS-D03032-025B.....	237	CFS-PA1532-100.....	242	CFT-R.....	70	CNVEKG.....	214
CFS-D03032-050B.....	237	CFS-PA1553-200.....	242	CFT-TC.....	70	CNVEKLB.....	214
CFS-D03032-100B.....	237	CFS-PA3032-100.....	242	CFT-TL.....	70	CNVEKLG.....	214

## GENERAL REFERENCE

CNVEKLR .....	214	CTA2KF .....	76	CZSL2PK .....	161, 180, 182	DC6WT .....	110
CNVEKLS .....	214	CTA2PK .....	76	CZSL500FEP .....	166, 184	DC8UW .....	116
CNVEKLU .....	214	CTA2S6 .....	76	CZSL500PK 161, 166, 180, 182, 184		DC8UWE .....	109
CNVEKR .....	214	CTA4KF .....	76	CZSL500TF .....	166, 184	DC8UWT .....	111
CNVEKS .....	214	CTA4PK .....	76	CZSL50FEP .....	166, 184	DC8W .....	115
CNVEKU .....	214	CTA4S6 .....	76	CZSL50PK . 161, 166, 180, 182, 184		DC8WE .....	108
CP-4D .....	71	CTCKF .....	74	CZSL50TF .....	166, 184	DC8WT .....	110
CP-4D .....	179	CTCPK .....	74	CZSL5FEP .....	166, 184	DCI4UW.2 .....	114
CP-4K .....	71	CTKF .....	74	CZSL5PKK .....	161, 180, 182	DCI4UW.5 .....	114
CP-4K .....	179	CTLKF .....	74	CZSL5PK .....	161, 166	DCI4UW1 .....	114
CP-CM1-P .....	83	CTLPK .....	74	CZSL5PK .....	180, 182, 184	DCI4UW2 .....	114
CP-DSM .....	83	CTMKF .....	74	CZSL5TF .....	166, 184	DCI4UWE.2 .....	105
CP-DSM2 .....	83	CTMPK .....	74	CZUCKF .....	72	DCI4UWE.5 .....	105
CP2-4841-100D .....	83	CTPK .....	74	CZUCPK .....	72	DCI4UWE1 .....	105
CP2-4841-100M1 .....	83	CU4LKF .....	72	CZUCS6 .....	72	DCI4UWE2 .....	105
CP2-4841-100SM .....	83	CU4LPK .....	72	CZUKF .....	72	DCI4W.06 .....	114
CP3-8182-625D .....	83	CUCKF .....	72	CZUMKF .....	72	DCI4W.1 .....	114
CP3-8182-625M2 .....	83	CUCPK .....	72	CZUMPK .....	72	DCI4W.2 .....	114
CP3-8182-625SM2 .....	83	CUKF .....	72	CZUMS6 .....	72	DCI4W.5 .....	114
CPA2KF .....	77	CULKF .....	72	CZUPK .....	72	DCI4WE.06 .....	104
CPA2PK .....	77	CULPK .....	72	CZUS6 .....	72	DCI4WE.1 .....	104
CPA4KF .....	77	CUMKF .....	72	D-2 .....	221	DCI4WE.2 .....	104
CPA4PK .....	77	CUMPK .....	72	D-2-220 .....	221	DCI4WE.5 .....	104
CPKF .....	71	CUPK .....	72	D-2-I .....	221	DCSC10MWE .....	126
CPPK .....	71	CUTPP .....	72	D-2-I-220 .....	221	DCSC12MWE .....	126
CR10 .....	205	CVA10GS1 .....	215	D-3-I-7890 .....	223	DCSC16MWE .....	126
CR10 .....	205	CVA10GS2 .....	215	D-3-I-7890-220 .....	223	DCSC6MWE .....	126
CR3 .....	205	CVA150US1 .....	215	D-3-I-HP .....	223	DCSD10MWE .....	124
CR3 .....	205	CVA150US2 .....	215	D-3-I-HP-220 .....	223	DCSD10UW .....	134
CR3 .....	205	CVA1KYS1 .....	215	D-4-I .....	223	DCSD12MWE .....	124
CR3 .....	205	CVA1KYS2 .....	215	D-4-I-220 .....	223	DCSD16MWE .....	124
CR3 .....	205	CVA500BS1 .....	215	D-4-I-HP58 .....	223	DCSD4UW .....	134
CR8 .....	205	CVA500BS2 .....	215	D-4-I-HP58-220 .....	223	DCSD6MWE .....	124
CR8 .....	205	CVA50RS1 .....	215	D-4-I-SH14-R .....	223	DCSD6UW .....	134
CSD10UW .....	134	CVA50RS2 .....	215	D-4-I-SH14-R-220 .....	223	DCSF10MWE .....	128
CSD4UW .....	134	CXCKF .....	74	D-4-I-SH17-R .....	223	DCSF12MWE .....	128
CSD6UW .....	134	CXCPK .....	74	D-4-I-SH17-R-220 .....	223	DCSF16MWE .....	128
CSL10 .....	144, 156, 161, 180, 182	CXKF .....	74	D-4-I-TQ-R .....	223	DCSF6MWE .....	128
CSL100 .....	144, 156, 161, 180, 182	CXLKF .....	74	D-4-I-TQ-R-220 .....	223	DCST10MWE .....	130
CSL100TI .....	161	CXLPK .....	74	D-4-I-VA38-R .....	223	DCST12MWE .....	130
CSL10K .....	144, 156, 161, 180, 182	CXMKF .....	74	D-4-I-VA38-R-220 .....	223	DCST16MWE .....	130
CSL10TI .....	161	CXMPK .....	74	D10UW .....	117	DCST4UW .....	135
CSL1K .....	144, 156, 161, 180, 182	CXPK .....	74	D10UWE .....	112	DCST6MWE .....	130
CSL1KTI .....	161	CZBUCKF .....	73	D10UWT .....	113	DCST6UW .....	135
CSL2 .....	144, 156, 161, 180, 182	CZBUCPK .....	73	D4UW .....	117	DCSTF10MWE .....	132
CSL20 .....	144, 156, 161, 180, 182	CZBUCS6 .....	73	D4UWE .....	112	DCSTF12MWE .....	132
CSL20TI .....	161	CZBUKF .....	73	D4UWT .....	113	DCSTF16MWE .....	132
CSL250 .....	144, 156, 161, 180, 182	CZBUMKF .....	73	D6UW .....	117	DCSTF6MWE .....	132
CSL250TI .....	161	CZBUMPK .....	73	D6UWE .....	112	DI4UWE.2 .....	105
CSL2K .....	144, 156, 161, 180, 182	CZBUMS6 .....	73	D6UWT .....	113	DI4UWE.5 .....	105
CSL5 .....	144, 156, 161, 180, 182	CZBUPK .....	73	D8UW .....	117	DI4UWE1 .....	105
CSL50 .....	144, 156, 161, 180, 182	CZBUS6 .....	73	D8UWE .....	112	DI4UWE2 .....	105
CSL500 .....	144, 156, 161, 180, 182	CZSL100FEP .....	166, 184	D8UWT .....	113	DL10UW .....	118
CSL500TI .....	161	CZSL100PK 161, 166, 180, 182, 184		DC10UW .....	116	DL4UW .....	118
CSL50TI .....	161	CZSL100TF .....	166, 184	DC10UWE .....	109	DL6UW .....	118
CSL5K .....	144, 156, 161, 180, 182	CZSL10FEP .....	166, 184	DC10UWT .....	111	DL8UW .....	118
CSLN10K .....	144, 155, 158	CZSL10PK . 161, 166, 180, 182, 184		DC10W .....	115	DN10WE .....	106
CSLN10KPK .....	158	CZSL10TF .....	166, 184	DC10WE .....	108	DN10WT .....	107
CSLN1K .....	144, 158	CZSL1KFEP .....	166, 184	DC10WT .....	110	DN4WE .....	106
CSLN1K5 .....	155	CZSL1KPK . 161, 166, 180, 182, 184		DC4UW .....	116	DN4WT .....	107
CSLN1KPK .....	158	CZSL1KTF .....	166, 184	DC4UWE .....	109	DN6WE .....	106
CSLN2K .....	144, 155, 158	CZSL20FEP .....	166, 184	DC4UWT .....	111	DN6WT .....	107
CSLN2KPK .....	158	CZSL20PK . 161, 166, 180, 182, 184		DC4W .....	115	DN8WE .....	106
CSLN5K .....	144, 155, 158	CZSL20TF .....	166, 184	DC4WE .....	108	DN8WT .....	107
CSLN5KPK .....	158	CZSL250FEP .....	166, 184	DC4WT .....	110	DNI4WE.06 .....	104
CSS-X1553-200 .....	240	CZSL250PK 161, 166, 180, 182, 184		DC6UW .....	116	DNI4WE.1 .....	104
CSS-X3053-200 .....	240	CZSL250TF .....	166, 184	DC6UWE .....	109	DNI4WE.2 .....	104
CSS-X3053-500 .....	240	CZSL2KFEP .....	166, 184	DC6UWT .....	111	DNI4WE.5 .....	104
CST .....	68	CZSL2KPK . 161, 166, 180, 182, 184		DC6W .....	115	DSC10MWE .....	127
CST .....	68	CZSL2KTF .....	166, 184	DC6WE .....	108	DSC12MWE .....	127

# Index by product number

## GENERAL REFERENCE

DSC16MWE.....	127	ECEF211.0F.....	43	EH4N10WE.....	106	EMTSD4UW.....	134
DSC6MWE.....	127	ECEF412.1.....	44	EH4N10WT.....	107	EMTSD6UW.....	134
DSD10MWE.....	125	ECEF412.1F.....	44	EH4N4WE.....	106	EMTSD8UW.....	134
DSD12MWE.....	125	ECEF413.0.....	44	EH4N4WT.....	107	EN.5.....	11
DSD16MWE.....	125	ECEF413.0F.....	44	EH4N6WE.....	106	EN.5KN.....	11
DSD4UW.....	134	ECEF414.0.....	44	EH4N6WT.....	107	EN1.....	11
DSD6MWE.....	125	ECEF414.0F.....	44	EH4N8WE.....	106	EN1K.....	11
DSD6UW.....	134	ECEF414.6.....	44	EH4N8WT.....	107	EN2.....	11
DSD8UW.....	134	ECEF414.6F.....	44	EHS.....	190	EN2SI.....	41
DSF10MWE.....	129	ECEF616.0.....	45	EMH.....	192	EN4.....	11
DSF12MWE.....	129	ECEF616.0F.....	45	EMH2.....	192	EN6.....	11
DSF16MWE.....	129	ECEF617.0.....	45	EMHS.....	192	EN8.....	11
DSF6MWE.....	129	ECEF617.0F.....	45	EMT.....	192	EP.....	190
DST10MWE.....	131	ECEF8110.0.....	45	EMT2.....	192	EP2.....	190
DST12MWE.....	131	ECEF8110.0F.....	45	EMT2CSC10MWE.....	126	EP2CI4WE.06.....	104
DST16MWE.....	131	ECEF819.0.....	45	EMT2CSC12MWE.....	126	EP2CI4WE.1.....	104
DST6MWE.....	131	ECEF819.0F.....	45	EMT2CSC16MWE.....	126	EP2CI4WE.2.....	104
DSTF10MWE.....	133	ED.....	190	EMT2CSC6MWE.....	126	EP2CI4WE.5.....	104
DSTF12MWE.....	133	ED10UW.....	117	EMT2CSD10MWE.....	124	EP2NI4WE.06.....	104
DSTF16MWE.....	133	ED2.....	190	EMT2CSD12MWE.....	124	EP2NI4WE.1.....	104
DSTF6MWE.....	133	ED2CI4UWE.2.....	105	EMT2CSD16MWE.....	124	EP2NI4WE.2.....	104
DV12-1110.....	144	ED2CI4UWE.5.....	105	EMT2CSD6MWE.....	124	EP2NI4WE.5.....	104
DV12-1114-5.....	144	ED2CI4UWE1.....	105	EMT2CSF10MWE.....	128	EPC10W.....	115
DV12-1114-1.....	144	ED2CI4UWE2.....	105	EMT2CSF12MWE.....	128	EPC4W.....	115
DV12-1116.....	144	ED2I4UWE.2.....	105	EMT2CSF16MWE.....	128	EPC6W.....	115
DV22-2110.....	144	ED2I4UWE.5.....	105	EMT2CSF6MWE.....	128	EPC8W.....	115
DV22-2114-5.....	144	ED2I4UWE1.....	105	EMT2CST10MWE.....	130	EPCI4W.06.....	114
DV22-2114-1.....	144	ED2I4UWE2.....	105	EMT2CST12MWE.....	130	EPCI4W.1.....	114
DV22-2116.....	144	ED410UWE.....	112	EMT2CST16MWE.....	130	EPCI4W.2.....	114
DV22-21D.....	144	ED410UWT.....	113	EMT2CST6MWE.....	130	EPCI4W.5.....	114
DV22-21D.....	144	ED44UWE.....	112	EMT2CSTF10MWE.....	132	EQ.....	190
DV22-22D.....	144	ED44UWT.....	113	EMT2CSTF12MWE.....	132	EQ.....	190
DV22-3110.....	144	ED46UWE.....	112	EMT2CSTF16MWE.....	132	EQ2.....	190
DV22-3114-5.....	144	ED46UWT.....	113	EMT2CSTF6MWE.....	132	EQS.....	190
DV22-3114-1.....	144	ED48UWE.....	112	EMT2SC10MWE.....	127	ERU21.....	30
DV22-3116.....	144	ED48UWT.....	113	EMT2SC12MWE.....	127	ERU21L.....	30
DV22-31D.....	144	ED4C10UWE.....	109	EMT2SC16MWE.....	127	ERU21T.....	30
DVBRKIT.....	32, 33, 144	ED4C10UWT.....	111	EMT2SC6MWE.....	127	ERU41.....	30
DVI.....	199	ED4C4UWE.....	109	EMT2SD10MWE.....	125	ERU41T.....	30
DVI-220.....	199	ED4C4UWT.....	111	EMT2SD12MWE.....	125	ERU42.....	30
DVL4MWE2.....	112	ED4C6UWE.....	109	EMT2SD16MWE.....	125	ERU42L.....	30
DVL6MWE2.....	112	ED4C6UWT.....	111	EMT2SD6MWE.....	125	ERU42T.....	30
DVL8MWE2.....	112	ED4C8UWE.....	109	EMT2SF10MWE.....	129	ET.....	190
DVLSC4MWE2.....	127	ED4C8UWT.....	111	EMT2SF12MWE.....	129	ET2.....	190
DVLSC6MWE2.....	127	ED4UW.....	117	EMT2SF16MWE.....	129	ET4VL4MWE2.....	112
DVLSC8MWE2.....	127	ED6UW.....	117	EMT2SF6MWE.....	129	ET4VL6MWE2.....	112
DVLSD10MWE2.....	125	ED8UW.....	117	EMT2ST10MWE.....	131	ET4VL8MWE2.....	112
DVLSD4MWE2.....	125	EDC10UW.....	116	EMT2ST12MWE.....	131	ETS.....	190
DVLSD6MWE2.....	125	EDC4UW.....	116	EMT2ST16MWE.....	131	EU.5.....	19
DVLSD8MWE2.....	125	EDC6UW.....	116	EMT2ST6MWE.....	131	EU.5.....	27
DVLSF4MWE2.....	129	EDC8UW.....	116	EMT2STF10MWE.....	133	EU.5L.....	19
DVLSF6MWE2.....	129	EDCI4UW.2.....	114	EMT2STF12MWE.....	133	EU.5L.....	27
DVLSF8MWE2.....	129	EDCI4UW.5.....	114	EMT2STF16MWE.....	133	EU.5T.....	27
EAOR21.....	216	EDCI4UW1.....	114	EMT2STF6MWE.....	133	EU.5TFS.25-5.....	19
EAOR22.....	216	EDCI4UW2.....	114	EMT2VLSC4MWE2.....	127	EU2.....	27
EBRU12L6.....	30	EDL10UW.....	118	EMT2VLSC6MWE2.....	127	EU2L.....	27
EBRU12T.....	30	EDL4UW.....	118	EMT2VLSC8MWE2.....	127	EU2T.....	27
EBRU14L.....	30	EDL6UW.....	118	EMT2VLSL10MWE2.....	125	EU4.....	27
EBRU14T.....	30	EDL8UW.....	118	EMT2VLSL4MWE2.....	125	EU4L.....	27
EBRU24L.....	30	EDS.....	190	EMT2VLSL6MWE2.....	125	EU4T.....	27
EBU2L.....	27	EH.....	190	EMT2VLSL8MWE2.....	125	EU4.....	193
EBU2T.....	27	EH2.....	190	EMT2VLSF4MWE2.....	129	EUDA.....	193
EBU4.....	27	EH4C10WE.....	108	EMT2VLSF6MWE2.....	129	EUIDB.....	193
EBU4L.....	27	EH4C10WT.....	110	EMT2VLSF8MWE2.....	129	EUIDC.....	193
EBU4T.....	27	EH4C4WE.....	108	EMTCSD10UW.....	134	EUH.....	193
ECEF111.0.....	43	EH4C4WT.....	110	EMTCSD4UW.....	134	EUHA.....	193
ECEF111.0F.....	43	EH4C6WE.....	108	EMTCSD6UW.....	134	EUHB.....	193
ECEF1K1.....	45	EH4C6WT.....	110	EMTCST4UW.....	135	EUHC.....	193
ECEF1K1F.....	45	EH4C8WE.....	108	EMTCST6UW.....	135	EUT.....	193
ECEF211.0.....	43	EH4C8WT.....	110	EMTS.....	192	EUTA.....	193



**GENERAL REFERENCE**

EUTB	193	EZRU42L	31	FC10SV2S3	216	FC30SV3S4	217
EUTC	193	EZRU42T	31	FC10SV2S4	216	FC30SV4K	217
EZA1	39	EZU.5	27	FC10SV3K	216	FC30SV4S3	217
EZA2	39	EZU.5L	27	FC10SV3S3	216	FC30SV4S4	217
EZBRU.51	31	EZU1	27	FC10SV3S4	216	FC31AV1	217
EZBRU.51L	31	EZU1C	27	FC10SV4K	216	FP1Z3M21	34
EZBRU.51T	31	EZU1M	27	FC10SV4S3	216	FP1Z3M22	34
EZBRU1.5L	31	EZU1T	27	FC10SV4S4	216	FP1Z3M24	34
EZBRU1.5T	31	EZU2	27	FC10SV5K	216	FP1Z3M41	34
EZBRU2.5L	31	EZU2L	27	FC10SV5S3	216	FP1Z3M42	34
EZBRU2.5T	31	EZU2T	27	FC10SV5S4	216	FP1Z3M44	34
EZBRU21	31	F-TCF	197	FC10SV6K	216	FP2Z3M21	34
EZBRU21T	31	FC10AS1K	216	FC10SV6S3	216	FP2Z3M22	34
EZBRU41	31	FC10AS1S3	216	FC10SV6S4	216	FP2Z3M24	34
EZBRU41T	31	FC10AS1S4	216	FC22AS1K	217	FP2Z3M41	34
EZBRU42	31	FC10AS2K	216	FC22AS1S3	217	FP2Z3M42	34
EZBRU42L	31	FC10AS2S3	216	FC22AS1S4	217	FP2Z3M44	34
EZBRU42T	31	FC10AS2S4	216	FC22AV1K	217	FPEA22	36
EZBU1	27	FC10AS3K	216	FC22AV1S3	217	FPEA24	36
EZBU1C	27	FC10AS3S3	216	FC22AV1S4	217	FPEA42	36
EZBU1M	27	FC10AS3S4	216	FC22SS1K	217	FPEA44	36
EZBU1T	27	FC10AS4K	216	FC22SS1S3	217	FPEA82	36
EZBU2	27	FC10AS4S3	216	FC22SS1S4	217	FPEA84	36
EZBU2L	27	FC10AS4S4	216	FC22SV1K	217	FPZA21	35
EZBU2T	27	FC10AS5K	216	FC22SV1S3	217	FPZA22	35
EZR1.5	39	FC10AS5S3	216	FC22SV1S4	217	FPZA22L	35
EZR1.5T	39	FC10AS5S4	216	FC30AS1K	217	FPZA41	35
EZR2.5	39	FC10AS6K	216	FC30AS1S3	217	FPZA42	35
EZR21	39	FC10AS6S3	216	FC30AS1S4	217	FPZA42L	35
EZR21T	39	FC10AS6S4	216	FC30AS2K	217	FPZA44L	35
EZR41	39	FC10AV1K	216	FC30AS2S3	217	FPZA81	35
EZR41T	39	FC10AV1S3	216	FC30AS2S4	217	FPZA82	35
EZR42	39	FC10AV1S4	216	FC30AS3K	217	FPZA82L	35
EZR42T	39	FC10AV2K	216	FC30AS3S3	217	FPZA84L	35
EZRF1.5KF-5	15	FC10AV2S3	216	FC30AS3S4	217	FRK1	16, 54
EZRF1.5PK-5	15	FC10AV2S4	216	FC30AS4K	217	FRK2	16, 54
EZRF1.5TFG-5	15	FC10AV3K	216	FC30AS4S3	217	FS.2-5	16
EZRF1.5V-5	15	FC10AV3S3	216	FC30AS4S4	217	FS.25-5	16
EZRF2.5KF-5	15	FC10AV3S4	216	FC30AV1K	217	FS.25PK-5	16
EZRF2.5PK-5	15	FC10AV4K	216	FC30AV1S3	217	FS.25V1-5	16
EZRF2.5TFG-5	15	FC10AV4S3	216	FC30AV1S4	217	FS.36-5	16
EZRF2.5V-5	15	FC10AV4S4	216	FC30AV2K	217	FS.4-5	16
EZRF21KF-5	15	FC10AV5K	216	FC30AV2S3	217	FS.4PK-5	16
EZRF21PK-5	15	FC10AV5S3	216	FC30AV2S4	217	FS.4V1-5	16
EZRF21TFG-5	15	FC10AV5S4	216	FC30AV3K	217	FS.5-5	16
EZRF21V-5	15	FC10AV6K	216	FC30AV3S3	217	FS.5PK-5	16
EZRF41KF-5	15	FC10AV6S3	216	FC30AV3S4	217	FS.5PK-5	16
EZRF41PK-5	15	FC10AV6S4	216	FC30AV4K	217	FS.5V1-5	16
EZRF41TFG-5	15	FC10SS1K	216	FC30AV4S3	217	FS1.2-5	16
EZRF41V-5	15	FC10SS1S3	216	FC30AV4S4	217	FS1.25-5	16
EZRF42KF-5	15	FC10SS1S4	216	FC30SS1K	217	FS1.25PK-5	16
EZRF42PK-5	15	FC10SS2K	216	FC30SS1S3	217	FS1.25V1-5	16
EZRF42TFG-5	15	FC10SS2S3	216	FC30SS1S4	217	FS1.2PK-5	16
EZRF42V-5	15	FC10SS2S4	216	FC30SS2K	217	FS1.2V1-5	16
EZRU.51	31	FC10SS3K	216	FC30SS2S3	217	FS1.3-5	16
EZRU.51L	31	FC10SS3S3	216	FC30SS2S4	217	FS1.35-R10	18
EZRU.51T	31	FC10SS3S4	216	FC30SS3K	217	FS1.35-R10	18
EZRU1.5	31	FC10SS4K	216	FC30SS3S3	217	FS1.3PK-5	16
EZRU1.5L	31	FC10SS4S3	216	FC30SS3S4	217	FS1.3V1-5	16
EZRU1.5T	31	FC10SS4S4	216	FC30SS4K	217	FS1.4-5	16
EZRU2.5	31	FC10SS5K	216	FC30SS4S3	217	FS1.45-R10	18
EZRU2.5L	31	FC10SS5S3	216	FC30SS4S4	217	FS1.45-R10	18
EZRU2.5T	31	FC10SS5S4	216	FC30SV1K	217	FS1.4PK-5	16
EZRU21	31	FC10SS6K	216	FC30SV1S3	217	FS1.4V1-5	16
EZRU21C	31	FC10SS6S3	216	FC30SV1S4	217	FS1.5-5	16
EZRU21T	31	FC10SS6S4	216	FC30SV2K	217	FS1.5PK-5	16
EZRU41	31	FC10SV1K	216	FC30SV2S3	217	FS1.5V1-5	16
EZRU41C	31	FC10SV1S3	216	FC30SV2S4	217	FS1.75-R10	18
EZRU41T	31	FC10SV1S4	216	FC30SV3K	217	FS1.75-R10	18
EZRU42	31	FC10SV2K	216	FC30SV3S3	217	FS1.8-5	16

# Index by product number

## GENERAL REFERENCE

FS1.8PK-5.....	16	HVE6.....	201	JR-357180-5.....	90	LZNF1PKG-5.....	62
FS1.8V1-5.....	16	HVE6X.....	201	JR-35P.....	67	LZP.5FPK.....	64
FS1.9-5.....	16	HVEA.....	201	JR-367008-10.....	80	LZP1.....	11
FS1.9PK-5.....	16	HVEAN.....	201	JR-367008-2.....	80	LZP1H.....	11
FS1.9V1-5.....	16	HVEANX.....	201	JR-367008-20.....	80	LZP1PK.....	64
FS11.0-5.....	16	HVEAX.....	201	JR-367016-10.....	80	LZP1PK.....	71
FS11.0PK-5.....	16	HVEB.....	201	JR-367016-2.....	80	LZP2.....	11
FS11.0V1-5.....	16	HVEBN.....	201	JR-367016-20.....	80	LZP2H.....	11
FS1L.15PK-5.....	17	HVEBNX.....	201	JR-55010-5.....	66	MR.....	55,211
FS1L.2-5.....	17	HVEBX.....	201	JR-55011-5.....	66	MRX.5PK.....	23
FS1L.2PK-5.....	17	HVEC.....	201	JR-55012-5.....	66	MRX.5S6.....	23
FS1L.4-5.....	17	HVECX.....	201	JR-55013-5.....	66	MRX1PK.....	23
FS1L.4PK-5.....	17	HWSC-SC8-6.....	205	JR-55014-5.....	66	MRX1S6.....	23
FS1L.5-5.....	17	HWSC-SC8-8B.....	205	JR-55015-5.....	66	MRY.5PK.....	23
FS1L.5PK-5.....	17	HWSC-SC8-8B.....	205	JR-55016-12.....	66	MRY.5S6.....	23
FS1L.8-5.....	17	HWSC-SC8-8B.....	205	JR-55020-5.....	66	MRY1PK.....	23
FS1L.8PK-5.....	17	HWSC-SC8-8B.....	205	JR-55021-5.....	66	MRY1S6.....	23
FS1L1.0-5.....	17	HWSC-SC8-8B.....	205	JR-55022-5.....	66	MT.5CHC.....	23
FS1L1.0PK-5.....	17	HWSC-SC8-8B.....	205	JR-55023-5.....	66	MT.5CKF.....	23
FS1R.15PK-5.....	17	HWSC-SC8-8TDH.....	205	JR-55024-5.....	66	MT.5CPK.....	23
FS1R.2-5.....	17	HWSC-SC8-8TDH.....	205	JR-55025-5.....	66	MT.5CS6.....	23
FS1R.2PK-5.....	17	I-21014-01.....	203	JR-5508-5.....	66	MT.5CTI.....	23
FS1R.4-5.....	17	I-21208-05.....	202	JR-797.....	92	MT.5XCHC.....	23
FS1R.4PK-5.....	17	I-21208-06.....	202	JR-798.....	92	MT.5XCKF.....	23
FS1R.5-5.....	17	I-21208-33.....	202	JR-9000-0520.....	79	MT.5XCPK.....	23
FS1R.5PK-5.....	17	I-22697.....	175, 191, 192, 195	JR-9000-0530.....	79	MT.5XCS6.....	23
FS1R.8-5.....	17	I-22897-02.....	191, 195	JR-9000-0602.....	79	MT.5XCTI.....	23
FS1R.8PK-5.....	17	I-22897-03.....	191, 195	JR-9000-0640.....	79	MT1CHC.....	23
FS1R1.0-5.....	17	I-22897-04.....	191, 195	JR-9001-5.....	92	MT1CKF.....	23
FS1R1.0PK-5.....	17	I-22897-05.....	191, 195	JR-S-11001.....	81	MT1CPK.....	23
FSL.25-5.....	17	I-22897-06.....	191, 195	JR-S-11002.....	81	MT1CS6.....	23
FSL.4-5.....	17	I-22897-08.....	191, 195	JR-S-11003.....	81	MT1CTI.....	23
FSL.5-5.....	17	I-23572HP2.....	226	JR-T-5804.....	91	MT1XCHC.....	23
FSMUA1.5.....	20	I-23572NP2.....	226	JR-T-5999.....	91	MT1XCKF.....	23
FSMUAS1.5.....	20	I4UWE.2.....	105	JR-T-6000.....	91	MT1XCPK.....	23
FSMUAS1.5L.....	20	I4UWE.5.....	105	JR-T-6001.....	91	MT1XCS6.....	23
FSMUAS1.5M.....	20	I4UWE1.....	105	JR-T-6002.....	91	MT1XCTI.....	23
FSR.25-5.....	17	I4UWE2.....	105	JR-T-6003.....	91	MU.5CHC.....	23
FSR.3-5.....	17	ITC10399.....	203	JR-T-60031.....	91	MU.5CKF.....	23
FSR.4-5.....	17	ITC10399-220.....	203	JR-T-98013.....	91	MU.5CPK.....	23
FSR.5-5.....	17	IZERA1.5.....	21	JR-T-98017.....	91	MU.5CS6.....	23
FSZA-HP.....	18	IZERA1.5C.....	21	JR-T-98025.....	91	MU.5CTI.....	23
FSZNA-HP.....	18	IZERA1.5M.....	21	JR-T-98050.....	91	MU.5XCHC.....	23
HA1.....	202	IZN1-10.....	10	JR-T-98075.....	91	MU.5XCKF.....	23
HA1T.....	202	IZR1.5.....	38	JR-T-98200.....	91	MU.5XCPK.....	23
HA2.....	202	IZR1.5F.....	38	JR-TD-5804.....	91	MU.5XCS6.....	23
HA3.....	202	IZR1.5L.....	38	JR-TD-6007.....	91	MU.5XCTI.....	23
HA6.....	202	IZR1.5LF.....	38	JR-TD-6008.....	91	MU1CHC.....	23
HB.....	202	IZR1.5T.....	38	JR-TD-6009.....	91	MU1CKF.....	23
HB1N.....	202	IZR21.....	38	JR-TD-6010.....	91	MU1CPK.....	23
HBS.....	202	IZR21C.....	38	JR-TD-6011.....	91	MU1CS6.....	23
HCE1.....	203	IZR21CF.....	38	L4UW.....	118	MU1CTI.....	23
HCE1X.....	203	IZR21F.....	38	L6UW.....	118	MU1XCHC.....	23
HCE2.....	203	IZR21L.....	38	L8UW.....	118	MU1XCKF.....	23
HCE2X.....	203	IZR21LF.....	38	LNR-CIS4-B-5.....	245	MU1XCPK.....	23
HCEB.....	203	IZR21T.....	38	LNR-DGS4-5.....	245	MU1XCS6.....	23
HCEBX.....	203	IZR41.....	38	LNR-GS2-5.....	245	MU1XCTI.....	23
HCEC.....	203	IZR41F.....	38	LNR-GS4-5.....	245	MX.5CHC.....	23
HCECX.....	203	IZR42.....	38	LNR-HP2-5.....	245	MX.5CKF.....	23
HKS.....	54	IZR42F.....	38	LNR-HP4-5.....	245	MX.5CPK.....	23
HKS.....	210	IZR42L.....	38	LNR-VAR3.4-5.....	245	MX.5CS6.....	23
HP2-110.....	226	IZR42LF.....	38	LNR-VARGS2-5.....	245	MX.5CTI.....	23
HP2-220.....	226	JR-201540.....	71	LZN.5-10.....	10	MX.5XCHC.....	23
HPM-110.....	227	JR-26501.....	77	LZN.5FPK-10.....	63	MX.5XCKF.....	23
HPM-220.....	227	JR-26502.....	77	LZN1-10.....	10	MX.5XCPK.....	23
HSSA.....	199	JR-26503.....	77	LZN1PK-10.....	63	MX.5XCS6.....	23
HVE2.....	201	JR-26504.....	77	LZN2-10.....	10	MX.5XCTI.....	23
HVE2X.....	201	JR-32178.....	80	LZN4-10.....	10	MX1CHC.....	23
HVE3.....	201	JR-32179.....	80	LZNF1KF-5.....	62	MX1CKF.....	23
HVE3X.....	201	JR-357090-5.....	90	LZNF1PK-5.....	62	MX1CPK.....	23

## GENERAL REFERENCE

MX1CS6	23	PEA44	36	PS-614161	81	SFVLHT	213
MX1CTI	23	PEA82	36	PS-614163	81, 251	SFVLHT4	213
MX1XCHC	23	PEA84	36	PS-614170	81, 251	SFVO	213
MX1XCKF	23	PFAF	199	PS-614250	81, 251	SFVOHT	213
MX1XCPK	23	PFC2	199	PS-631201	251	SFVOHT4	213
MX1XCS6	23	PFC4	199	PS-631202	251	SFVOL	213
MX1XCTI	23	PFC4	199	PS-631203	251	SFVOLHT	213
MY.5CHC	23	PFW36	199	PS-631204	251	SFVOLHT4	213
MY.5CKF	23	PFW60	199	PS-631205	251	SI4G	41
MY.5CPK	23	PFW90	199	PS-631206	251	SL100CSTP	130
MY.5CS6	23	PM	210	PS-644350	251	SL100CSTUW	135
MY.5CTI	23	PR50A15E2	219	PS-644850	251	SL100CUW	109, 111, 116
MY.5XCHC	23	PR50A15Z1	219	PS-654050	251	SL100CW	108, 110, 115
MY.5XCKF	23	PR50A15Z2	219	PS-654051	251	SL100NW	106, 107
MY.5XCPK	23	PR50A30E2	219	PS-660100	248	SL100STP	131
MY.5XCS6	23	PR50A30Z1	219	PS-660110	248	SL100UW	113, 117, 118
MY.5XCTI	23	PR50A30Z2	219	PS-660200	248	SL10CSTUW	135
MY1CHC	23	PR50A60E2	219	PS-660210	248	SL10CUW	109, 111, 116
MY1CKF	23	PR50A60Z1	219	PS-660300	248	SL10CW	108, 110, 115
MY1CPK	23	PR50A60Z2	219	PS-660310	248	SL10KCSTP	130
MY1CS6	23	PR51A15E2	219	PS-660320	248	SL10KCSTUW	135
MY1CTI	23	PR51A15Z1	219	PS-943050	249	SL10KCUW	109, 111, 116
MY1XCHC	23	PR51A15Z2	219	PS-943051	249	SL10KCW	108, 110, 115
MY1XCKF	23	PR51A30E2	219	PS-943052	249	SL10KSTP	131
MY1XCPK	23	PR51A30Z1	219	PS-943060	249	SL10KUW	113, 117, 118
MY1XCS6	23	PR51A30Z2	219	PS-943061	249	SL10NW	107
MY1XCTI	23	PR51A60E2	219	PS-943062	249	SL10UW	113, 117
MZN1-10	10	PR51A60Z1	219	PV	55, 211	SL15CSTUW	135
MZN1PK-10	63	PR51A60Z2	219	PZA21	35	SL15CUW	109, 111, 116
MZNF1KF-5	62	PS-050023	249	PZA21T	35	SL15CW	108, 110, 115
MZNF1PK-5	62	PS-050024	249	PZA22	35	SL15NW	107, 113
MZNF1PKG-5	62	PS-050025	249	PZA41	35	SL15UW	117
MZP1PK	64, 71	PS-050031	249	PZA42	35	SL1KCSTP	130
NP2-110	226	PS-050032	249	PZA42L	35	SL1KCSTUW	135
NP2-220	226	PS-050033	249	PZA44L	35	SL1KCUW	109, 111, 116
NPM-110	227	PS-050034	249	PZA81	35	SL1KCW	108, 110, 115
NPM-220	227	PS-050035	249	PZA82	35	SL1KSTP	131
OEW	55, 210	PS-050036	249	PZA82L	35	SL1KUW	113, 117, 118
OEW-2	55, 210	PS-050043	249	PZA84L	35	SL20CSTUW	135
OEW-3	55, 210	PS-050044	249	RAD	204	SL20CUW	109, 111, 116
OR	197	PS-050045	249	RF1.5KF-5	15	SL20CW	108, 110, 115
ORMP	196	PS-050051	249	RF1.5PK-5	15	SL20KUW	113, 117, 118
ORT	197	PS-050052	249	RF1.5TFG-5	15	SL20NW	107
ORTMP	196	PS-050053	249	RF1.5V-5	15	SL20UW	113, 117
P100-1	247	PS-050054	249	RF2.5KF-5	15	SL250CSTP	130
P100-2	247	PS-050055	249	RF2.5PK-5	15	SL250CSTUW	135
P200-1	247	PS-050056	249	RF2.5TFG-5	15	SL250CUW	109, 111, 116
P200-2	247	PS-123050R	250	RF2.5V-5	15	SL250CW	108, 110, 115
P300-1	247	PS-160021	250	RF21KF-5	15	SL250NW	106, 107
P300-2	247	PS-160021R	250	RF21PK-5	15	SL250STP	131
P310-1	247	PS-160022	250	RF21TFG-5	15	SL250UW	113, 117, 118
P310-2	247	PS-160022R	250	RF21V-5	15	SL25CSTUW	135
P350-1	247	PS-160023	250	RF41KF-5	15	SL25CUW	109, 111, 116
P350-2	247	PS-160023R	250	RF41PK-5	15	SL25CW	108, 110, 115
P400-1	247	PS-160024	250	RF41TFG-5	15	SL25NW	106, 107
P400-2	247	PS-160024R	250	RF41V-5	15	SL25UW	113, 117
P500-1	247	PS-160025	250	RF42KF-5	15	SL2CW	108, 110, 115
P500-2	247	PS-160025R	250	RF42PK-5	15	SL2KCSTP	130
P600-1	247	PS-160221	250	RF42TFG-5	15	SL2KCSTUW	135
P600-2	247	PS-160221R	250	RF42V-5	15	SL2KCUW	109, 111, 116
P700-1	247	PS-160222	250	SD4UW	134	SL2KCW	108, 110, 115
P700-2	247	PS-160222R	250	SD6UW	134	SL2KSTP	131
PCL412	47	PS-160223	250	SD8UW	134	SL2KUW	113, 117, 118
PCL415	47	PS-160223R	250	SEAL1-HP	18	SL3CUW	116
PCS412F	47	PS-160224	250	SFEC42	47	SL500CSTP	130
PCS415F	47	PS-160224R	250	SFECH412	47	SL500CSTUW	135
PD-D2-IM	222	PS-160225	250	SFV	213	SL500CUW	109
PEA22	36	PS-160225R	250	SFVHT	213	SL500CUW	111, 116
PEA24	36	PS-614158	81, 251	SFVHT4	213	SL500CW	108, 110, 115
PEA42	36	PS-614160	81, 251	SFVL	213	SL500NW	106, 107

# Index by product number

## GENERAL REFERENCE

SL500STP.....	131	SSACI4W.2.....	114	SSASTF10MWE.....	133	T10N20-100.....	94
SL500UW.....	113, 117, 118	SSACI4W.5.....	114	SSASTF12MWE.....	133	T10N20-50.....	94
SL50CSTP.....	130	SSACI4WE.06.....	104	SSASTF16MWE.....	133	T10N20D.....	94
SL50CSTUW.....	135	SSACI4WE.1.....	104	SSASTF6MWE.....	133	T10N5-10.....	94
SL50CUW.....	109, 111, 116	SSACI4WE.2.....	104	SSAVL4MWE2.....	112	T10N5-100.....	94
SL50CW.....	108, 110, 115	SSACI4WE.5.....	104	SSAVL6MWE2.....	112	T10N5-50.....	94
SL50NW.....	106, 107	SSACSC10MWE.....	126	SSAVL8MWE2.....	112	T10N5D.....	94
SL50UW.....	113, 117	SSACSC12MWE.....	126	SSAVLSC4MWE2.....	127	T200-1.....	247
SL5CUW.....	109, 111	SSACSC16MWE.....	126	SSAVLSC6MWE2.....	127	T200-2.....	247
SL5CUW.....	116	SSACSC6MWE.....	126	SSAVLSC8MWE2.....	127	T20C10-10.....	95
SL5CW.....	108, 110, 115	SSACSD10MWE.....	124	SSAVLSD10MWE2.....	125	T20C10-100.....	95
SL5KCSTP.....	130	SSACSD10UW.....	134	SSAVLSD4MWE2.....	125	T20C10-50.....	95
SL5KCSTUW.....	135	SSACSD12MWE.....	124	SSAVLSD6MWE2.....	125	T20C10D.....	95
SL5KCUW.....	109	SSACSD16MWE.....	124	SSAVLSD8MWE2.....	125	T20C20-10.....	95
SL5KCUW.....	111, 116	SSACSD4UW.....	134	SSAVLSF4MWE2.....	129	T20C20-100.....	95
SL5KCUW.....	108, 110	SSACSD6MWE.....	124	SSAVLSF6MWE2.....	129	T20C20-50.....	95
SL5KSTP.....	131	SSACSD6UW.....	134	SSAVLSF8MWE2.....	129	T20C20D.....	95
SL5KUW.....	113, 117, 118	SSACSF10MWE.....	128	SWH3.....	54, 210	T20C30-10.....	95
SL5NW.....	107	SSACSF12MWE.....	128	SWH4.....	54, 210	T20C30-100.....	95
SOMAP.....	204	SSACSF16MWE.....	128	T100-1.....	247	T20C30-50.....	95
SOMAPPF.....	204	SSACSF6MWE.....	128	T100-2.....	247	T20C30D.....	95
SOMAW.....	204	SSACST10MWE.....	130	T100C10-10.....	95	T20C40-10.....	95
SOUTH.....	204	SSACST12MWE.....	130	T100C10-100.....	95	T20C40-100.....	95
SPSS40.....	84	SSACST16MWE.....	130	T100C10-50.....	95	T20C40-50.....	95
SSA10UW.....	117	SSACST4UW.....	135	T100C10D.....	95	T20C40D.....	95
SSA10UWE.....	112	SSACST6MWE.....	130	T100C20-10.....	95	T20C5-10.....	95
SSA10UWT.....	113	SSACST6UW.....	135	T100C20-100.....	95	T20C5-100.....	95
SSA4UW.....	117	SSACSTF10MWE.....	132	T100C20-50.....	95	T20C5-50.....	95
SSA4UWE.....	112	SSACSTF12MWE.....	132	T100C20D.....	95	T20C5D.....	95
SSA4UWT.....	113	SSACSTF16MWE.....	132	T100C30-10.....	95	T20N10-10.....	94
SSA6UW.....	117	SSACSTF6MWE.....	132	T100C30-100.....	95	T20N10-100.....	94
SSA6UWE.....	112	SSAI4UWE.2.....	105	T100C30-50.....	95	T20N10-50.....	94
SSA6UWT.....	113	SSAI4UWE.5.....	105	T100C30D.....	95	T20N10D.....	94
SSA8UW.....	117	SSAI4UWE1.....	105	T100C40-10.....	95	T20N20-10.....	94
SSA8UWE.....	112	SSAI4UWE2.....	105	T100C40-100.....	95	T20N20-100.....	94
SSA8UWT.....	113	SSAL10UW.....	118	T100C40-50.....	95	T20N20-50.....	94
SSAC10UW.....	116	SSAL4UW.....	118	T100C40D.....	95	T20N20D.....	94
SSAC10UWE.....	109	SSAL6UW.....	118	T100N10-10.....	94	T20N5-10.....	94
SSAC10UWT.....	111	SSAL8UW.....	118	T100N10-100.....	94	T20N5-100.....	94
SSAC10W.....	115	SSAN10WE.....	106	T100N10-50.....	94	T20N5-50.....	94
SSAC10WE.....	108	SSAN10WT.....	107	T100N10D.....	94	T20N5D.....	94
SSAC10WT.....	110	SSAN4WE.....	106	T100N20-10.....	94	T300-1.....	247
SSAC4UW.....	116	SSAN4WT.....	107	T100N20-100.....	94	T300-2.....	247
SSAC4UWE.....	109	SSAN6WE.....	106	T100N20-50.....	94	T30C10-10.....	95
SSAC4UWT.....	111	SSAN6WT.....	107	T100N20D.....	94	T30C10-100.....	95
SSAC4W.....	115	SSAN8WE.....	106	T10C10-10.....	95	T30C10-50.....	95
SSAC4WE.....	108	SSAN8WT.....	107	T10C10-100.....	95	T30C10D.....	95
SSAC4WT.....	110	SSANI4WE.06.....	104	T10C10-50.....	95	T30C20-10.....	95
SSAC6UW.....	116	SSANI4WE.1.....	104	T10C10D.....	95	T30C20-100.....	95
SSAC6UWE.....	109	SSANI4WE.2.....	104	T10C20-10.....	95	T30C20-50.....	95
SSAC6UWT.....	111	SSANI4WE.5.....	104	T10C20-100.....	95	T30C20D.....	95
SSAC6W.....	115	SSASC10MWE.....	127	T10C20-50.....	95	T30C30-10.....	95
SSAC6WE.....	108	SSASC12MWE.....	127	T10C20D.....	95	T30C30-100.....	95
SSAC6WT.....	110	SSASC16MWE.....	127	T10C30-10.....	95	T30C30-50.....	95
SSAC8UW.....	116	SSASC6MWE.....	127	T10C30-100.....	95	T30C30D.....	95
SSAC8UWE.....	109	SSASD10MWE.....	125	T10C30-50.....	95	T30C40-10.....	95
SSAC8UWT.....	111	SSASD12MWE.....	125	T10C30D.....	95	T30C40-100.....	95
SSAC8W.....	115	SSASD16MWE.....	125	T10C40-10.....	95	T30C40-50.....	95
SSAC8WE.....	108	SSASD4UW.....	134	T10C40-100.....	95	T30C40D.....	95
SSAC8WT.....	110	SSASD6MWE.....	125	T10C40-50.....	95	T30C5-10.....	95
SSACI4UW.2.....	114	SSASD6UW.....	134	T10C40D.....	95	T30C5-100.....	95
SSACI4UW.5.....	114	SSASD8UW.....	134	T10C5-10.....	95	T30C5-50.....	95
SSACI4UW1.....	114	SSASF10MWE.....	129	T10C5-100.....	95	T30C5D.....	95
SSACI4UW2.....	114	SSASF12MWE.....	129	T10C5-50.....	95	T30N10-10.....	94
SSACI4UWE.2.....	105	SSASF16MWE.....	129	T10C5D.....	95	T30N10-100.....	94
SSACI4UWE.5.....	105	SSASF6MWE.....	129	T10N10-10.....	94	T30N10-50.....	94
SSACI4UWE1.....	105	SSAST10MWE.....	131	T10N10-100.....	94	T30N10D.....	94
SSACI4UWE2.....	105	SSAST12MWE.....	131	T10N10-50.....	94	T30N20-10.....	94
SSACI4W.06.....	114	SSAST16MWE.....	131	T10N10D.....	94	T30N20-100.....	94
SSACI4W.1.....	114	SSAST6MWE.....	131	T10N20-10.....	94	T30N20-50.....	94

**GENERAL REFERENCE**

T30N20D	94	T5N5-100	94	TNI.520	93	TSS260	93
T30N5-10	94	T5N5-50	94	TNI105	93	TSS267	93
T30N5-100	94	T5N5D	94	TNI120	93	TSS285	93
T30N5-50	94	T700-1	247	TNI130	93	TTF106-10M	92
T30N5D	94	T700-2	247	TNI140	93	TTF106-25M	92
T400-1	247	TC2D-C-110	227	TNI285	93	TTF106-5M	92
T400-2	247	TC2D-C-220	227	TNPK16001140050	89	TTF110-10M	92
T401-1	247	TC2D-NIFE-110	227	TNPK16001140075	89	TTF110-25M	92
T401-2	247	TC2D-NIFE-220	227	TNPK16001140100	89	TTF110-5M	92
T50C1 0D	95	TC2D-NIFED-110	227	TNPK160011401015	89	TTF115-10M	92
T50C10-10	95	TC2D-NIFED-220	227	TNPK16001140125	89	TTF115-25M	92
T50C10-100	95	TCEF1.5.5C	46	TNPK16001140180	89	TTF115-5M	92
T50C10-50	95	TCEF1.5.5T	46	TNPK16001140250	89	TTF120-10M	92
T50C20-10	95	TCEF111	46	TNPK16001140305	89	TTF120-25M	92
T50C20-100	95	TCEF211	46	TNPK16001140510	89	TTF120-5M	92
T50C20-50	95	TCEF211T	46	TNPK16001140760	89	TTF130-10M	92
T50C20D	95	TCEF411	46	TNPK800360050	89	TTF130-25M	92
T50C30-10	95	TCEF411C	46	TNPK800360075	89	TTF130-5M	92
T50C30-100	95	TCEF411T	46	TNPK800360100	89	TTF230-10M	92
T50C30-50	95	TCEF421	46	TNPK800360125	89	TTF230-25M	92
T50C30D	95	TCEF611	46	TNPK800360180	89	TTF230-5M	92
T50C40-10	95	TCEF611T	46	TNPK800360205	89	TTF260-10M	92
T50C40-100	95	TCEF811	46	TNPK800404250	89	TTF260-25M	92
T50C40-50	95	TCEF811T	46	TNPK800510305	89	TTF260-5M	92
T50C40D	95	TEFNI.101	87	TNPK800535380	89	TTF285-10M	92
T50C5-10	95	TEFNI.102	87	TNPK800660510	89	TTF285-25M	92
T50C5-100	95	TEFNI.104	87	TPK.102	90	TTF285-5M	92
T50C5-50	95	TEFNI.105	87	TPK.104	90	TTZ110-10M	92
T50C5D	95	TEFNI.110	87	TPK.105	90	TTZ110-25M	92
T50N10-10	94	TEFNI.502	87	TPK.106	90	TTZ110-5M	92
T50N10-100	94	TEFNI.504	87	TPK.502-10M	90	TTZ120-10M	92
T50N10-50	94	TEFNI.505	87	TPK.502-25M	90	TTZ120-25M	92
T50N10D	94	TEFNI.507	87	TPK.502-5M	90	TTZ120-5M	92
T50N20-10	94	TEFNI.510	87	TPK.505-10M	90	TTZ130-10M	92
T50N20-100	94	TEFNI.512	87	TPK.505-25M	90	TTZ130-25M	92
T50N20-50	94	TEFNI.515	87	TPK.505-5M	90	TTZ130-5M	92
T50N20D	94	TEFNI.520	87	TPK.510-10M	90	TTZ260-10M	92
T50N5-10	94	TEFNI120	87	TPK.510-25M	90	TTZ260-25M	92
T50N5-100	94	TEFNI130	87	TPK.510-5M	90	TTZ260-5M	92
T50N5-50	94	TEFNI140	87	TPK.515-10M	90	UMD	194
T50N5D	94	TEMPLATE1	55,211	TPK.515-25M	90	UMDA	194
T5C10-10	95	TFEP110-10M	92	TPK.515-5M	90	UMDB	194
T5C10-100	95	TFEP110-25M	92	TPK106-10M	90	UMDC	194
T5C10-50	95	TFEP110-5M	92	TPK106-25M	90	UMH	194
T5C10D	95	TFEP120-10M	92	TPK106-5M	90	UMHA	194
T5C20-10	95	TFEP120-25M	92	TPK110-10M	90	UMHB	194
T5C20-100	95	TFEP120-5M	92	TPK110-25M	90	UMHC	194
T5C20-50	95	TFEP130-10M	92	TPK110-5M	90	UMT	194
T5C20D	95	TFEP130-25M	92	TPK120-10M	90	UMTA	194
T5C30-10	95	TFEP130-5M	92	TPK120-25M	90	UMTB	194
T5C30-100	95	TFEP260-10M	92	TPK120-5M	90	UMTC	194
T5C30-50	95	TFEP260-25M	92	TPK130-10M	90	V-EMPMCR-HP1100	195
T5C30D	95	TFEP260-5M	92	TPK130-25M	90	V-EMPMCR-HP1100-10	195
T5C40-10	95	THC110	93	TPK130-5M	90	V-EMPMCR-HP6890	195
T5C40-100	95	THC120	93	TPK260-10M	90	V-EMPMCR-HP6890N	195
T5C40-50	95	THC130	93	TPK260-25M	90	V-EMPMCR-HP6890N	195
T5C40D	95	THC140	93	TPK260-5M	90	V-EMPMCR-WA2690	195
T5C5-10	95	THC270	93	TSS.505	93	V-EMPMCR-WA2690-10	195
T5C5-100	95	THC285	93	TSS.507	93	V-RA-24VDC-HP6890	191
T5C5-50	95	THC261	93	TSS.510	93	V-RA-24VDC-HP6890	191
T5C5D	95	TINCO261	93	TSS.520	93	V-RA-24VDC-VA3800	191
T5N10-10	94	TINCO282	93	TSS105	93	V-RA-5VDC-HP1100	191
T5N10-100	94	TNFS800360010	88	TSS110	93	V-RA-5VDC-WA2690	191
T5N10-50	94	TNFS800360015	88	TSS115	93	V-SV-S32-110VAC	198
T5N10D	94	TNFS800360020	88	TSS120	93	V-SV-S32-220VAC	198
T5N20-10	94	TNFS800360050	88	TSS126	93	V-SV-S32-24VAC	198
T5N20-100	94	TNFS800360100	88	TSS130	93	V-SV-S32-24VDC	198
T5N20-50	94	TNFS800360180	88	TSS140	93	V-SV-S52-110VAC	198
T5N20D	94	TNFS800360250	88	TSS230	93	V-SV-S52-220VAC	198
T5N5-10	94	TNI.510	93	TSS240	93	V-SV-S52-24VAC	198

# Index by product number


## GENERAL REFERENCE

V-SV-S52-24VDC	198	ZBRU41C	29	ZF.5-10	12	ZF4TI	12
V-SV-S53-110VAC	198	ZBRU41T	29	ZF.5B-10	12	ZF4V1-5	13
V-SV-S53-220VAC	198	ZBRU42	29	ZF.5FEP-10	13	ZF4V-5	13
V-SV-S53-24VAC	198	ZBRU42L	29	ZF.5GP-10	12	ZF6FEP-10	13
V-SV-S53-24VDC	198	ZBRU42T	29	ZF.5GV-5	13	ZF6GV-5	13
VISF.5FPK	40	ZBRUF1.5	50	ZF.5HC	12	ZF6KF-10	13
VISF-1	40	ZBRUF21	50	ZF.5KF-10	13	ZF6PFA-10	13
VISF-2	40	ZBRUF42	50	ZF.5NI	12	ZF6PK-10	13,63
VISF-A	40	ZBRUFR1.5	52	ZF.5PFA-10	13	ZF6PKG-10	63
VISL-1	40	ZBRUFR1.5F	51	ZF.5PK-10	13	ZF6TF-10	13
VISL-1	40	ZBRUFR21	52	ZF.5PK-10	63	ZF6TFG-10	13
VISL-1H	40	ZBRUFR21F	51	ZF.5PK-5	16	ZF6V1-5	13
VISL-2	40	ZBRUFR41	52	ZF.5PKG-10	63	ZF6V-5	13
VSH	211	ZBRUFR41F	51	ZF.5S6-10	12	ZF8FEP-10	13
WMMA	208	ZBRUFR42	52	ZF.5TF-10	13	ZF8GV-5	13
WMMA10	208	ZBRUFR42F	51	ZF.5TFG-10	13	ZF8KF-10	13
WMMASO	204	ZBU.5	26	ZF.5TI	12	ZF8PFA-10	13
XLZN1-10	10	ZBU.5FPK	65	ZF.5V1-5	13,16	ZF8PK-10	13,63
XLZN2-10	10	ZBU.5L	26	ZF.5V-5	13,16	ZF8PKG-10	63
Z10M1	33	ZBU.5LFPK	65	ZF1-10	12	ZF8TF-10	13
Z10M1PK	33	ZBU.5T	26	ZF1B-10	12	ZF8TFG-10	13
Z10M2	33	ZBU.5TFPK	65	ZF1FEP-10	13	ZF8V1-5	13
Z12M1	33	ZBU.5XC	26	ZF1GP-10	12	ZF8V-5	13
Z12M1PK	33	ZBU1	26	ZF1GV-5	13	ZGF.5PK	59
Z12M2	33	ZBU1C	26	ZF1HC	12	ZGF.5PK-10	63
Z14M1	33	ZBU1CFPK	65	ZF1KF-10	13	ZGF1PK-10	63
Z14M1PK	33	ZBU1CPK	65	ZF1NI	12	ZLA-5	41
Z16M1PK	33	ZBU1FPK	65	ZF1PFA-10	13	ZLA-1	41
Z4M1	33	ZBU1L	26	ZF1PK-10	13,63	ZLA-2	41
Z4M1PK	33	ZBU1M	26	ZF1PKG-10	63	ZLCA1PK	77
Z4M2	33	ZBU1MFPK	65	ZF1S6-10	12	ZLTA41	37
Z6M1	33	ZBU1MPK	65	ZF1TF-10	13	ZN.5-10	10
Z6M1PK	33	ZBU1PK	65	ZF1TFG-10	13	ZN.5FPK-10	63
Z6M2	33	ZBU1T	26	ZF1TI	12	ZN1-10	10
Z8M1	33	ZBU1TFPK	65	ZF1V1-5	13	ZN1FPK-10	63
Z8M1PK	33	ZBU1TPK	65	ZF1V-5	13	ZN1PK-10	63
Z8M2	33	ZBU1XC	26	ZF1VISF	40	ZN1R	10
ZAOR11	216	ZBU2	26	ZF1VISF	40	ZN1RFPK	10
ZAOR12	216	ZBU2L	26	ZF2-10	12	ZN1RPK	10
ZAOR22	216	ZBU2LPK	65	ZF2B-10	12	ZN2-10	10
ZBAA1	37	ZBU2PK	65	ZF2FEP-10	13	ZN2PK-10	63
ZBNV1	218	ZBU2T	26	ZF2GP-10	12	ZN2R	10
ZBNV1-D	218	ZBU2TPK	65	ZF2GV-5	13	ZN4-10	10
ZBNV1F	218	ZBU4	26	ZF2HC	12	ZN.5PK-5	62
ZBNV1F-D	218	ZBU4L	26	ZF2KF-10	13	ZN.5PKG-5	62
ZBNV1F-KZ	218	ZBU4T	26	ZF2NI	12	ZN.5FKF-5	62
ZBNV1-KZ	218	ZBUF1	50	ZF2PFA-10	13	ZN.5FPK-5	62
ZBNV1LF	218	ZBUF2	50	ZF2PK-10	13,63	ZN.5FKF-5	62
ZBNV1LF-D	218	ZBUF4	50	ZF2PKG-10	63	ZN.5FPK-5	62
ZBNV1LF-KZ	218	ZBUFLKF	76	ZF2S6-10	12	ZN.5FKF-5	62
ZBRU1.5	29	ZBUFLPK	76	ZF2SI	41	ZN.5FKF-5	62
ZBRU1.5FPK	65	ZBUFR.5	52	ZF2TF-10	13	ZNFT	67
ZBRU1.5L	29	ZBUFR.5F	51	ZF2TFG-10	13	ZP.5	11
ZBRU1.5LFPK	65	ZBUFR1	52	ZF2TI	12	ZP.5FPK	64
ZBRU1.5T	29	ZBUFR1C	52	ZF2V1-5	13	ZP.5H	11
ZBRU1.5TFPK	65	ZBUFR1CF	51	ZF2V-5	13	ZP1	11
ZBRU2.5	29	ZBUFR1F	51	ZF4B-10	12	ZP1FPK	64
ZBRU2.5FPK	65	ZBUFR2	52	ZF4FEP-10	13	ZP1FPK	71
ZBRU2.5L	29	ZBUFR2F	51	ZF4GP-10	12	ZP1H	11
ZBRU2.5LFPK	65	ZBUMLKF	76	ZF4GV-5	13	ZP2	11
ZBRU2.5T	29	ZBUMLPK	76	ZF4HC	12	ZP2H	11
ZBRU2.5TFPK	65	ZC.5	11	ZF4KF-10	13	ZP2PK	64
ZBRU21	29	ZC.5FPK	64	ZF4NI	12	ZP4	11
ZBRU21C	29	ZC1	11	ZF4PFA-10	13	ZRF1.5KF-5	14
ZBRU21CFPK	65	ZC1FPK	64	ZF4PK-10	13	ZRF1.5PK-5	14
ZBRU21FPK	65	ZC1PK	64	ZF4PK-10	63	ZRF1.5TFG-5	14
ZBRU21LFPK	65	ZC2	11	ZF4PKG-10	63	ZRF1.5V1-5	14
ZBRU21T	29	ZC2PK	64	ZF4S6-10	12	ZRF1.5V-5	14
ZBRU21TFPK	65	ZC4	11	ZF4TF-10	13	ZRF2.5KF-5	14
ZBRU41	29	ZERU1.5FPK	65	ZF4TFG-10	13	ZRF2.5PK-5	14

**GENERAL REFERENCE**

ZRF2.5TFG-5.....14	ZRU21T.....29	ZT4.....32	ZUF4.....50
ZRF2.5V1-5.....14	ZRU21TFPK.....65	ZT4L.....32	ZUFLKF.....76
ZRF2.5V-5.....14	ZRU41.....29	ZTA41.....37	ZUFLPK.....76
ZRF21KF-5.....14	ZRU41C.....29	ZU.5.....26	ZUFR.5.....52
ZRF21PK-5.....14	ZRU41T.....29	ZU.5FPK.....65	ZUFR.5F.....51
ZRF21TFG-5.....14	ZRU42.....29	ZU.5L.....26	ZUFR1.....52
ZRF21V1-5.....14	ZRU42L.....29	ZU.5LFPK.....65	ZUFR1C.....52
ZRF21V-5.....14	ZRU42T.....29	ZU.5T.....26	ZUFR1CF.....51
ZRF41KF-5.....14	ZRUF1.5.....50	ZU.5TFPK.....65	ZUFR1F.....51
ZRF41PK-5.....14	ZRUF21.....50	ZU.5XC.....26	ZUFR2.....52
ZRF41TFG-5.....14	ZRUF42.....50	ZU1.....26	ZUFR2F.....51
ZRF41V1-5.....14	ZRUFR1.5.....52	ZU1C.....26	ZVISF-1PE.....40
ZRF41V-5.....14	ZRUFR1.5F.....51	ZU1CFPK.....65	ZVISF-1PFA.....40
ZRF42KF-5.....14	ZRUFR21.....52	ZU1CPK.....65	ZVISF-1PFAH.....40
ZRF42PK-5.....14	ZRUFR21F.....51	ZU1FPK.....65	ZX.5.....32
ZRF42TFG-5.....14	ZRUFR41.....52	ZU1FPK.5.....78	ZX.5FPK.....64
ZRF42V1-5.....14	ZRUFR41F.....51	ZU1L.....32	ZX.5L.....32
ZRF42V-5.....14	ZRUFR42.....52	ZU1M.....26	ZX.5LFPK.....64
ZRU1.5.....29	ZRUFR42F.....51	ZU1MFPK.....65	ZX1.....32
ZRU1.5FPK.....65	ZSN1R.....10	ZU1MPK.....65	ZX1C.....32
ZRU1.5L.....29	ZT.5.....32	ZU1PK.....65	ZX1CFPK.....64
ZRU1.5LFPK.....65	ZT.5FPK.....64	ZU1T.....26	ZX1FPK.....64
ZRU1.5T.....29	ZT.5L.....32	ZU1TFPK.....65	ZX1L.....32
ZRU1.5TFPK.....65	ZT.5LFPK.....64	ZU1TPK.....65	ZX1LFPK.....64
ZRU1.5XC.....29	ZT1.....32	ZU1XC.....26	ZX1M.....32
ZRU2.5.....29	ZT1C.....32	ZU2.....26	ZX1MFPK.....64
ZRU2.5FPK.....65	ZT1CFPK.....64	ZU2L.....26	ZX2.....32
ZRU2.5L.....29	ZT1FPK.....64	ZU2LPK.....65	ZX2L.....32
ZRU2.5LFPK.....65	ZT1L.....32	ZU2PK.....65	ZX2LPK.....64
ZRU2.5T.....29	ZT1LFPK.....64	ZU2T.....26	ZX2PK.....64
ZRU2.5TFPK.....65	ZT1M.....32	ZU2TPK.....65	ZX4.....32
ZRU21.....29	ZT1MFPK.....64	ZU4.....26	ZX4L.....32
ZRU21C.....29	ZT2.....32	ZU4L.....26	ZXLTA41.....37
ZRU21CFPK.....65	ZT2L.....32	ZU4T.....26	
ZRU21FPK.....65	ZT2LPK.....64	ZUF1.....50	
ZRU21LFPK.....65	ZT2PK.....64	ZUF2.....50	

Contact us to receive your copy of these VICI catalogs.

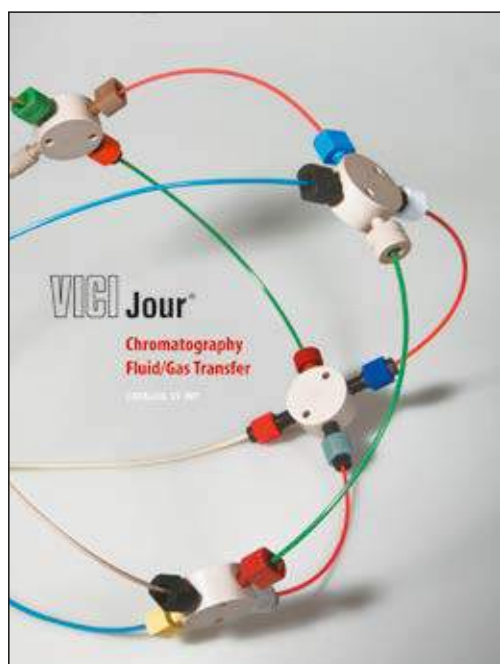


**VICI JOUR**

- High pressure polymeric and stainless steel fittings
- Nanovolume® HPLC fittings
- Low pressure fittings
- Filters and mobile phase filters
- Safety products
- Frits
- Columns and guard columns
- Sample loops

**VICI PRECISION SAMPLING**

- Gas tight syringes
- HPLC injection syringes
- Magnum syringes up to 500 mL
- Syringes for sampling from gas cylinders
- Mininert™ – Valves for vials
- Customized probes and shaped tubing

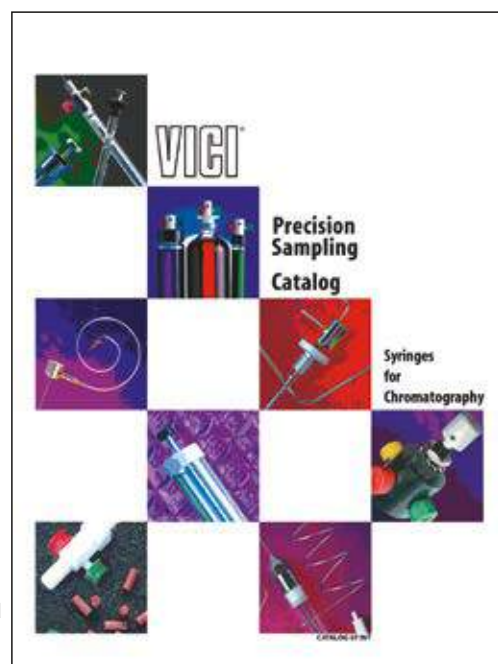

**GENERAL REFERENCE**

1/32" external union .....19  
 3-way solenoid air valves ..... 198  
 4-way solenoid air valves ..... 198  
 5-way solenoid air valves ..... 198  
 360 µm fittings ..... 57-58  
 4-way solenoid air valve ..... 198  
 10,000 psi injectors ..... 156-157  
 15,000 psi injectors ..... 154-157  
 40,000 psi injector system .....84  
 40,000 psi valves .....85

**A**

Actuator hardware  
 Closemount ..... 208  
 Right angle drive ..... 204  
 Standoff ..... 205

**ACTUATORS 188-197**  
 Air .....196-197  
 Microelectric ..... 190-192  
 Modular universal ..... 194  
 Universal ..... 193

Adapters  
 1/16" internal to  
     1/32" external .....21  
 Aerosol to Valco .....37  
 Cheminert  
     (See Cheminert Fittings)  
 External to internal .....39  
 Fused silica ..... 16-17  
 Fused silica makeup .....20  
 Injector/detector .....39  
 Internal reducers .....38  
 Pipe adapters  
     Cheminert .....77  
     Female to  
         Valco external .....36  
         Valco internal .....35  
     Male to  
         Valco external .....36  
         Valco internal .....35  
     Manifold pipe adapters .34  
 Syringe adapters  
     Female luer to Valco .....41  
     Female luer to 1/4-28 ...76  
     Fill ports .....40  
     Tube adapters ..... 37,76

Aerosol adapter  
     bulkhead union .....37  
 Air actuators for valves ... 196-197  
 Air actuator repair kits (O-rings)  
     Selector ..... 196  
     Two position ..... 197  
 Applications  
     Cheminert ..... 170-171  
     Diaphragm ..... 145  
     Selector ..... 136-141  
     Two position ...119-23, 170-71

**B**

Biocompatible filters ..... 78,80  
 Bulkhead reducing unions  
     Cheminert  
         High pressure PEEK .....65  
         Low pressure .....73

Bulkhead reducing unions, cont'd  
     Valco  
         External .....30  
         External/internal .....31  
         Internal .....29  
         Internal/external .....31  
 Bulkhead unions  
     Aerosol adapter  
         bulkhead union .....37  
     Cheminert ..... 65,73  
     External .....27  
     External/internal .....27  
     Internal .....26  
     Luer adapter .....76

**C**

Calibration gas  
     generators .....230-31,233  
 Calibration gas standards 229,232  
 Capillary columns .....234-245  
 Caps  
     Cheminert .....57-58,64,71  
     Valco .....11

**CHEMINERT FITTINGS 56-81**

1/4-28 to ZDV adapter .....77  
 360 µm fittings ..... 57-58  
 Bulkhead unions  
     Cheminert to Cheminert ...73  
     Cheminert to Valco .....73  
     Cheminert to Luer .....76  
 Caps  
     High pressure .....64  
     Low pressure .....71  
 Crosses  
     High pressure .....64  
     Low pressure (1/4-28) .....74  
     Nanovolume ..... 57,59  
 External nuts .....69  
 Ferrules .....63  
 Glass connectors .....75  
 High pressure  
     PEEK caps .....64  
     PEEK crosses .....64  
     PEEK ferrules .....63  
     PEEK internal nuts .....63  
     PEEK internal unions .....65  
     PEEK internal reducing  
         unions .....65  
     PEEK plugs .....64  
     PEEK tees .....64

Luer adapters  
     Cheminert (1/4-28) .....76  
     Luer adapter  
         bulkhead union .....76  
 Manifolds .....74  
 Mixing tees .....75  
 Nanovolume® fittings ..... 57-61  
 Nuts, PEEK high pressure .....63  
     (Also see *Tube end fittings*)

Pipe adapters  
     Female 1/4-28 to:  
         female NPT .....77  
         male NPT .....77  
     Male 1/4-28 to male NPT...77  
 Plugs High pressure .....64  
     Low pressure .....71

**CHEMINERT FITTINGS, cont'd**

Reducing unions .....65  
 Tees  
     High pressure .....64  
     Low pressure (1/4-28)... 74-75  
 Tube adapters  
     Male 1/4-28 to tube .....76  
 Tube end fittings  
     External nuts for  
         flanged tubing .....69  
     Flanged .....69  
     Flangeless 1/4-28 .....68  
 Unions  
     High pressure .....65  
     Low pressure  
         Cheminert to:  
             1/4" tubing .....72  
             Cheminert .....72  
             Valco .....72  
         Nanovolume ..... 57-59

**CHEMINERT INJECTORS/SELECTORS 146-187**

HPLC .....154-165  
 Low pressure ..... 166-169  
 Nanovolume .....154-55, 158-59  
 OEM ..... 180-187  
 Selectors ..... 172-179

Clean Cut tubing cutter .....92  
 Closemount hardware ..... 208  
 Color-It fingertight adapters...66  
 Column coupler .....77  
 Column end fittings  
     Analytical .....44  
     Microbore .....43  
     Nanovolume .....61  
     Post-column reaction .....46  
     Semi-preparative .....45  
     Preparative .....45

Columns  
     HPLC columns .....47  
     ValcoBond columns ... 234-245  
 Combo valves .....214-215  
 Combo pressure regulators... 219  
 Controlled radius nuts .....10  
 Crosses  
     Cheminert ..... 64,74  
     Microvolume ..... 22-23  
     Nanovolume ..... 57,59  
     Valco .....32

**D**

DVI (Digital valve interface)... 199  
 Detectors  
     Pulsed discharge  
         (PDD) ..... 220-225  
     Thermal conductivity  
         (TCD) ..... 227

**DIAPHRAGM VALVES 142-145**

Digital valve interface (DVI)... 199  
 Diluter/dispenser .....82  
 Drill index .....55  
 Dynacalibrators .....230-231

**E**

Easy-Flange kit .....71  
 Electric valve actuators  
     Microelectric,  
         Selector ..... 192  
         Two position ..... 190  
     Modular universal ..... 194  
     Universal ..... 193  
 Electroformed nickel tubing ...87

**F**

Ferrules  
     For fused silica .....16  
     For fused silica unions .....19  
     Grooved PEEK .....63  
     High pressure PEEK .....63  
     Nanovolume .....59  
     Reducing ..... 14-15  
     Standard  
         Metal .....12  
         Polymeric .....13  
 Ferrule removal kit ..... 16,54

**FIA PRODUCTS**

Cheminert fittings ..... 56-81  
 Cheminert valves ...166-69, 172-79  
 M series pump .....83  
 Mobile phase/ solvent  
     reservoirs .....81  
 Mobile phase filters ..... 78-80  
 Perifit fittings .....78  
 VICI-cap .....81

Fill ports  
     Metal and polymeric .....40  
     Zero dead volume .....40  
 Fill port assembly for Cheminert  
     C2 and C4 valves .....41

Filters  
     Biocompatible ..... 78-80  
     In-line .....78  
     Mobile phase ..... 78-80  
     Valco ..... 48-53  
         Pressed frit .....50  
         Removable frit .....51  
         Removable screen .....52

Fingertight fittings  
     High pressure PEEK ..... 63-66  
     Nanovolume ..... 59-61  
     No twist .....62  
     One-piece  
         color-coded PEEK .....66  
     One-piece column  
         coupler .....77

**FITTINGS**

Cheminert ..... 56-81  
 HPLC column end ..... 42-46  
 Nanovolume ..... 57-61  
 Valco .....6-55

Flanged tube end fittings .....69  
 Flangeless tube end fittings ...68  
 Flanging tools  
     and starter kits ..... 70-71



**FLOW, PRESSURE, AND ON/OFF CONTROL DEVICES 214-219**

Combo valves..... 214-215  
 Combo pressure regulators... 219  
 Flow controllers..... 216-217  
 Micrometering valves..... 218  
 Needle valves..... 218  
 On/off valves .....85, 212-213  
 Prime/purge valves ...85, 212-213

Flow controllers..... 216-217  
 Frits

for HPLC column  
 end fittings .....45  
 for Valco filters .....53  
 Nanovolume .....60  
 Fused silica adapters  
 One-piece.....16  
 Removable.....17  
 Fused silica fittings..... 16-21  
 1/32" external union.....19  
 1/16" internal to  
 1/32" external .....21  
 Injector nut for HP 6890  
 and 5890 .....18  
 Injector/detector adapter...39  
 Make-up adapter.....20  
 Unions..... 19, 57-58

**G**

GC columns..... 234-245  
 GC valves..... 104-113  
 Gas flow controllers..... 216-217  
 Gas purifiers .....226-27, 246-47  
 Glass connectors.....75  
 Glossary ..... 258-261

**H**

HPLC column end fittings  
 Analytical .....44  
 Microbore.....43  
 Nanovolume .....61  
 Post-column reaction.....46  
 Semi-preparative .....45  
 Preparative.....45  
 HPLC injectors  
 Analytical ..... 163-165  
 Integrated ..... 180, 182  
 Microbore..... 160-162  
 Nanobore .....154-55, 158-59  
 Valco ..... 114-118  
 HPLC precolumns  
 (guard columns).....47  
 HPLC integrated selectors ... 186  
 HSSA (High speed switching  
 accessory)..... 199  
 Heated column enclosures... 203  
 Heated valve enclosures..... 201  
 Heater cartridges ..... 202  
 Helium photoionization  
 detector..... 221-223  
 Helium purifier.....226-27, 246-47  
 Hex key set .....54  
 High speed switching accessory  
 (HSSA) ..... 199  
 High temperature air actuators  
 Selector..... 196  
 Two position ..... 197

**I**

IZR (Internal reducer).....38  
 Injection port liner ..... 245  
 Injector nut for HP-6890  
 and HP-5890 .....18  
 Injectors (See: *Cheminert valves*  
*Diaphragm valves*  
*Valco valves*)

**INSTRUMENTATION 220-227**

Helium purifiers.....226-27, 247  
 Nitrogen purifiers .....226-27, 247  
 Pulsed discharge detectors  
 (PDD) ..... 220-225  
 Thermal conductivity detectors  
 (TCD) ..... 227  
 Instrumentation temperature  
 controller (ITC) ..... 203  
 Integrated motor/valves  
 for LC ..... 180, 182, 184-186  
 Internal reducers (IZR).....38  
 Internal reducers  
 for 360 µm tubing .....38

**L**

Length conversions ..... 262  
 Liquid handling pump .....83  
 Loop fill port assembly for  
 Cheminert C2, C4 valves ....41  
 Loop installation wrench  
 (custom socket wrench) .. 210  
 Loops for each valve type are  
 found on the price list page  
 with their corresponding valves  
 Luer adapters  
 Cheminert .....76  
 Luer adapter bulkhead  
 union.....76  
 Valco .....41

**M**

M Series  
 Pump .....83  
 Diluter/dispenser.....82  
 Manifold pipe adapters .....34  
 Manifolds  
 Cheminert .....74  
 Valco .....33  
 Manual valve hardware  
 Closemount..... 208  
 Knobs and handles..... 204  
 Standoff ..... 205  
 Materials discussions  
 Metals ..... 254-255  
 Polymers ..... 256  
 Valve rotors ..... 257  
 Metronics..... 1  
 Micro valves for GC and LC ... 248  
 Microelectric actuator,  
 Selector..... 192  
 Two position ..... 190  
 Micrometering valves ..... 218  
 Microvolume connectors... 22-23  
 Mininert valves ..... 251  
 Mirror ..... 55, 211  
 Mobile phase filters ..... 78-80  
 Modular universal actuator... 194

**N**

Nanovolume®  
 360 µm fittings .....57-58  
 Caps ..... 57-58  
 Column end fittings .....61  
 Cross..... 57, 59  
 Ferrules ..... 57-59  
 Frits .....60  
 Injectors .....154-55, 158-59  
 Nuts ..... 57-59  
 Plugs ..... 57-58  
 Reducing unions ..... 57-59  
 Selectors..... 172  
 Tees..... 57, 59  
 Unions..... 57-60  
 Needle valves..... 218  
 Nitrogen purifiers .....226-27, 247  
 No twist one-piece fittings .....62  
 Non-radioactive pulsed  
 discharge detectors ... 220-23  
 Nuts  
 Cheminert high pressure .62-3  
 Cheminert low pressure ..68-9  
 Nanovolume ..... 57-59  
 Valco  
 Controlled radius .....10  
 External .....11  
 Internal.....10  
 Septum injector nuts .....41

**O**

OEM  
 Injectors .....151, 180-85  
 Selectors.....153, 186-87  
 Universal actuator ..... 193-94  
 O-ring kits for air actuators  
 Selector..... 196  
 Two position ..... 197  
 On/off valves ..... 212-13  
 On/off valve, 40K psi .....85  
 Open end wrenches..... 210  
 One-piece fingertight  
 fittings ..... 62-3, 66

**P**

PDD (Pulsed discharge  
 detector)..... 220-23  
 PEEK fittings, high pressure...62-6  
 PEEK tubing ..... 90-91  
 Dual layer .....91  
 Pencil magnet ..... 210  
 Perifit fittings .....78  
 Permeation devices ..... 228-29  
 Pin vise .....55  
 Pipe adapters  
 Cheminert .....77  
 Female 1/4-28 to  
 female NPT .....77  
 male NPT .....77  
 Female NPT to  
 Valco external .....36  
 Valco internal.....35  
 Male 1/4-28 to male NPT....77  
 Male NPT to  
 Valco external .....36  
 Valco internal.....35  
 Manifold pipe adapters .....34

**Plugs**

Cheminert  
 High pressure.....64  
 Low pressure .....71  
 Valco .....11  
 Polymeric ferrules..... 13-15, 63  
 Position feedback for  
 Manual valves ..... 199  
 Air actuated valves ..... 199  
 Post-column reaction fittings...46  
 Precision Sampling..... 1  
 Precolumns (guard columns) ...47  
 Pressure conversions ..... 262  
 Pressure regulators..... 219  
 Prime/purge valves ..... 212-13  
 Pulsed discharge detectors  
 (PDD) ..... 220-23  
 Pump (M Series) .....83  
 Purge housings for valves .... 200  
 Purifiers, gas .....226-27, 246-47

**R**

RAD (Right angle drive) ..... 204  
 Reduced breakdown  
 injection liner ..... 245  
 Reducing ferrules  
 External .....15  
 Internal .....14  
 Standard .....15  
 Reducing unions  
 Bulkhead  
 (See *Bulkhead  
 reducing unions*)  
 Cheminert  
 High pressure.....65  
 Nanovolume ..... 57-59  
 Valco  
 External .....30  
 External/internal.....31  
 Internal.....29  
 Internal/external.....31  
 Regulators, flow ..... 216-17  
 Regulators, pressure..... 219  
 Right angle drive (RAD) ..... 204  
 Rotor materials ..... 257

**S**

Safety issues ..... 252  
 Sample loops  
 for each valve type are found  
 on the price list page with  
 their corresponding valves  
 Screens .....53  
 Selectors  
 Cheminert ..... 172-79  
 Nanovolume ..... 172  
 OEM ..... 186-87  
 Valco ..... 124-35  
 Septum injector nut.....41  
 Solenoid air valves  
 3-way ..... 198  
 4-way ..... 198  
 5-way ..... 198  
 Solvent reservoirs .....81  
 Standoff assemblies..... 205

## GENERAL REFERENCE

Syringe adapters	
Loop fill port assembly	
for C2 and C4 valves	41
Luer adapters	
Cheminert	76
Luer adapter bulkhead	
union	76
Valco	41
Fill ports	
For metal valves	40
For polymeric valves	40
Nanovolume	59
Zero dead volume	40
Septum injector nuts	41
Zero dead volume	
fill ports	40
Syringes	249-50

## T

TCD (Thermal conductivity detector)	227
Tees	
Cheminert high pressure	64
Cheminert low pressure	74-75
Mixing	75
Microvolume	22-23
Nanovolume	57-59
Valco	32
Temperature controllers	
ITC (Instrumentation temperature controller)	203
Temperature conversions	262
Template for valve schematics	55
Thermal conductivity detector (TCD)	227

## TOOLS

Drill index	55
Ferrule removal kit	54
Hex key set	54
Loop installation wrench (custom socket wrench)	210
Open end wrenches	210
Mirror	55, 211
Pencil magnet	210
Pin vise	55
Template	55
Tightening tools for PEEK fittings	67
Valve spanner handle	211
Trademarks	263
Tube adapters	37, 76
Tube end fittings (Cheminert)	
External	69
Flanged	69
Flangeless	68

## TUBING 86-95

Color coded PEEK	
Dual-layer PEEK	91
Striped PEEK	91
Custom lengths	
Metal	93
PEEK	90
Pre-cut lengths	
Stainless	94-95
Polymeric	90, 92
316 Stainless	93-95
Electroformed nickel	87

## TUBING, CONT'D

ETFE	92
FEP	92
Hastelloy C	93
Inconel 600	93
Nickel 200	93
Nickel-clad	88-89
PEEK	90-91
PTFE	92
Tubing clip	92
Tubing cutter	92

## U

UHPLC injectors and selectors	
Nanovolume®	154-55
Microbore	156-57
On/off	85
Prime/purge	85
Selectors	172-73
Unions	
Bulkhead	
(See Bulkhead unions)	
Cheminert	
High pressure	65
Low pressure	72
Nanovolume	57-79
Reducing	
(See Reducing unions)	
Valco	
1/32" external	19
External	27
Fused silica	19
Internal	26
Microvolume	22-23
Reducing	28-31
Universal actuator	193-94

## V

Valco Canada	1
Valco Instruments	1
<b>VALCO FITTINGS 6-55</b>	
1/32" external union	19
Adapters	
1/16" internal to 1/32" external reducer	21
Aerosol to Valco	37
External to internal	39
Fused silica	16-17
Fused silica makeup	20
Injector/detector	39
Internal reducers	38
Manifold pipe adapters	34
Pipe adapters	35-36
Syringe adapters	
Female luer to Valco	41
Fill ports	40
Tube adapters	37
Bulkhead reducing unions	
External	30
External/internal	31
Internal	29
Internal/external	31
Bulkhead unions	
Aerosol adapter	37
External	27
External/internal	27
Internal	26
Caps	11

## VALCO FITTINGS, CONT'D

Column end fittings	
Analytical	44
Microbore	43
Post-column reaction	46
Semi-preparative and preparative	45
Crosses	32
Microvolume	22-23
Ferrules	
For fused silica	16
Reducing	14-15
Standard	
Metal	12
Polymeric	13
Ferrule removal kit	54
Fill ports	40
Filters	48-53
Pressed frit	50
Removable frit	51
Removable screen	52
Frits	
For HPLC column end fittings	45
For filters	53
Fused silica adapters	
One-piece	16
Removable	17
Fused silica fittings	
1/32" external union	19
1/16" internal to 1/32" external	21
Injector nut for HP-6890 and HP-5890	18
Inj/detector adapter	39
Make-up adapter	20
Microvolume unions	22-23
HPLC precolumns (guard columns)	47
Injector nut for HP-6890 and HP-5890	18
Internal reducers	38
Loop fill port assembly for C2 and C4 valves	41
Luer adapters	41
Manifold pipe adapters	34
Manifolds	33
Microvolume connectors	22-23
Nuts	
Controlled radius	10
External	11
Internal	10
Septum injector nuts	41
Pipe adapters	
Female NPT to	
Valco external	36
Valco internal	35
Male NPT to	
Valco external	36
Valco internal	35
Manifold pipe adapters	34
Plugs	11
Polymeric ferrules	13
Post-column reaction fittings	46
Precolumns (guard columns)	47
Reducing ferrules	14-15
Reducing unions	29-31
Screens	53
Septum injector nut	41

## VALCO FITTINGS, CONT'D

Syringe adapters	
Loop fill port assembly	
for C2, C4 valves	41
Luer adapters	41
Fill ports	
For metal valves	40
For polymeric valves	40
Zero dead volume	40
Septum injector nuts	41
Tees	32
Microvolume	22-23
Tube adapters	37
Unions	
1/32" external	19
Bulkhead	26-27
External	27
External/internal reducing	31
Fused silica	19
Internal	26
Internal/external reducing	31
Microvolume	22-23
Reducing	29-31

## VALCO INJECTORS/VALVES

GC	104-13
HPLC	114-18
Selectors	124-35
Low pressure	124-33
High pressure	134-35
ValcoBond columns	234-245
ValcoPLOT columns	242-244
Valve actuators	
Air	196-97
Microelectric	190-92
Universal (OEM)	193-94
Valve spanner handle	211
Valves	
Cheminert	146-187
Combo valves	214-15
Diaphragm valves	142-45
Nanovolume®	154-55, 158-59
Needle	218
On-off	
Standard	212-13
UHPLC	85
Prime/purge	
Standard	212-13
UHPLC	85
Valco	98-141
VICI-cap	81
VICI AG	1
VICI AG International	1
VICI Metronics	1
VICI Precision Sampling	1
VICI Valco Canada	1
VICI Valco Instruments	1

## W

Warranty	253
Wrenches	54-55

## To order

### EUROPE, MIDDLE EAST, ASIA, and AFRICA

#### VICI AG International

##### SALES

- Phone: Int + 41· 41· 925-6200
- Fax: Int + 41· 41· 925-6201
- Email: order@vici.ch

##### TECHNICAL

- Phone: Int + 41· 41· 925-6200
- Fax: Int + 41· 41· 925-6201
- Email: support@vici.ch

##### SERVICE

- Phone: Int + 41· 41· 925-6200
- Fax: Int + 41· 41· 925-6201

Parkstrasse 2  
CH-6214 Schenkon  
Switzerland

info@vici.ch

Ex works, Schenkon, Switzerland.

We accept:



### Conditions of Sale

Terms and Conditions of Sale for VICI AG International can be downloaded from [www.vici.ch](http://www.vici.ch).

### Returns

No returns will be accepted more than 90 days after shipment for any reason. Before 90 days, no returns will be accepted without prior authorization. If it is necessary to return material to us, please contact our Sales Department for a return authorization number and forwarding instructions. Inspect shipments upon receipt and report shortages and incorrect or damaged material to us immediately.

*Important!* Damaged shipments must remain with the original packaging for freight company inspection.

Returned material will be subject to a restocking charge of 20% for catalog items. Special orders cannot be returned unless defective.

### CANADA

#### VICI Valco Instruments Canada Corporation

- Toll-free: 866-297-2626
- Phone: 613-342-2600
- Fax: 613-342-0111
- Email: canada@vici.com

26 Water Street East  
Brockville, Ontario  
Canada K6V 1A1

canada@vici.com

F.O.B. shipping point, our factory,  
Brockville, Canada.

We accept:



### Repairs

For repair return authorization or information about factory refurbishments, contact our Service Department.

### Technical Service

Our capable staff is waiting to assist you with your technical questions and application needs.

### Notice

VICI reserves the right to correct errors and change prices, designs, or specifications without notice or liability. The information in this catalog is correct to the best of our knowledge but is not guaranteed to be so. VICI assumes no responsibility with respect thereto.

### NORTH AMERICA (except Canada), SOUTH and CENTRAL AMERICA, AUSTRALIA and NEW ZEALAND

#### VICI Valco Instruments Co. Inc.

##### SALES

- Phone: 800-367-8424\*  
\* USA and Canada only
- Fax: 713-688-8106
- Email: sales\_usa@vici.com

##### TECHNICAL

- Phone: 713-688-9345
- Fax: 713-956-1649
- Email: tech\_usa@vici.com

##### SERVICE

- Phone: 713-688-9345
- Fax: 713-688-7618
- Email: service@vici.com

P.O. Box 55603  
Houston, TX 77255  
USA

valco@vici.com

F.O.B. shipping point, our factory,  
Houston, Texas.

We accept:





**VICI Valco Instruments**  
**VICI AG International**  
**VICI Valco Instruments Canada**  
**VICI Metronics**  
**VICI Precision Sampling**

